




bike frame: lite

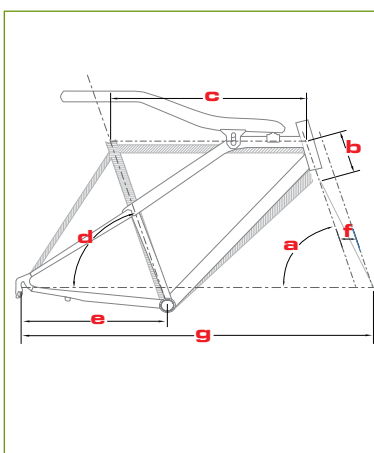

geometry	xxs	xs	xs	xs	xs	COMPONENTS
frame size	(45-47)	(48-50)	(48-50)	(48-50)	(48-50)	AERO PARTS:
head tube angle, a	72°	72°	72°	72°	72°	handlebar: Truvativ Team Road
head tube length, b (cm)	9	9.4	9.4	9.4	9.4	aerobar: Profile Century
virtual tt length at 73° seat tube angle, c (cm)	49.1	52.8	52.8	52.8	52.8	stern: Truvativ Team
virtual tt length at 76° seat tube angle, c (cm)	46.5	50	50	50	50	headset: FSA Orbit
virtual top tube range, d	69-81°	69-81°	69-81°	69-81°	69-81°	bar tape: Cinelli
chain stay length, e (cm)	38	38	38	38	38	saddle: SRS
offset, f (mm)	45	45	45	45	45	brake lever: Dia Compe 188
bb height (cm)	26.8	26.8	26.8	26.8	26.8	shift lever: Dura Ace Bar End
wheel size	650c	650c	650c	650c	650c	brake caliper: 105
wheel base, g (cm)	92.7	94.5	94.5	94.5	94.5	wheelset: Bontrager Select
max-min saddle height (from bb)*	73.5-60•	75-61.5•	75-61.5•	75-61.5•	75-61.5•	tires: Hutchinson Carbon

There are as many optimum fits as there are cyclists seeking them. The Lite is designed specifically for the needs of the small, compact rider. Softride realizes that "size really does matter". Using rider input, Softride

designers have created a bike combining the benefits of beam technology with size specific designs, to create an explosive package for the smaller framed rider seeking to get all they can out of their frame & fit.

About our frame sizes: Because of the top tube and seat tube adjustability inherent in our designs, we size our frames using ranges. *Measurements taken with Selle Italia Flite saddle mounted full back for maximum height and full forward for minimum height. •Optional Classic Beam Hi-jacker accessory allows additional height increase of 4.5 cm.

bb:
Truvativ Elita Team SL
chain:
105
crank:
Truvativ Elita Team
cassette:
105 - 12 / 25
front & rear derailleur:
105
fork:
SRS Carbon Straight