


STOWE

BY PHASE 3 CYCLES

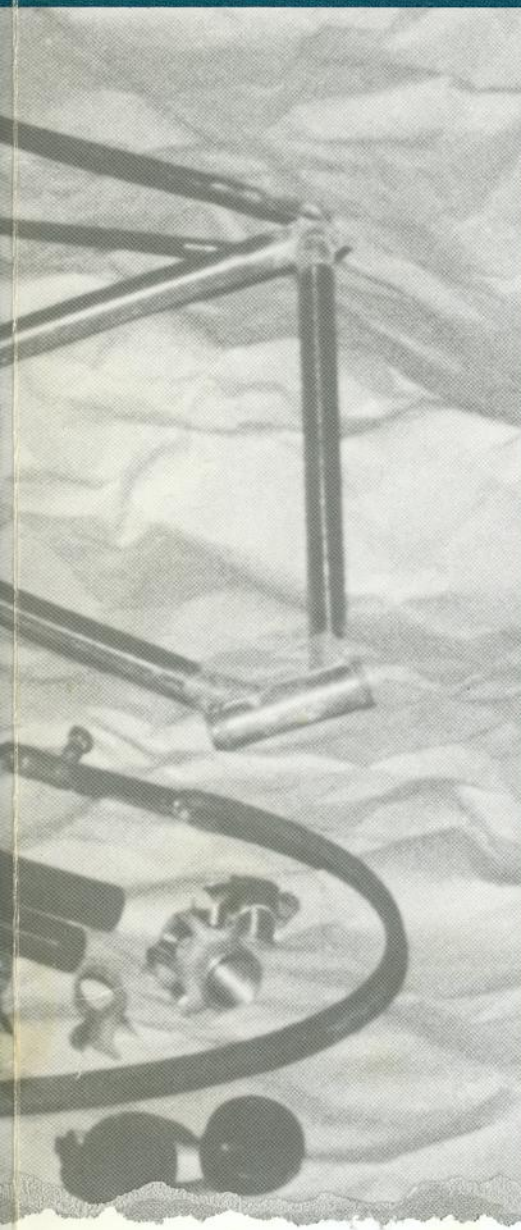

STOWE EUROPRO

Designed for road racing, this frame is exceptionally fast, agile and sure. Born of European stage racing design, this frame works with you so it's more comfortable and you're more efficient.

- All investment cast lugs, shell and crown construction
- European road racing geometry
- Ultra light construction utilizing a custom blend of Tange Prestige tubing.
- Custom paint available
- Completely handbuilt by Robert Stowe and Dale DuRoss

STANDARD DIMENSIONS:

Seatpost Diameter—27.2mm
Rear Spacing—126mm (6 or 7SP)
Bottom Bracket—68mm Eng.
B.B. Drop—7.9cm
Fork Stem—22.2mm
Headset—26.4mm Eng.
B.B. Height—25.7cm
Brake Reach—Short, Recessed Allen Type


To place order, specify size by seat tube length in centimeters. All dimensions in cm, center to center. Angles in degrees.

Specifications subject to change for improvement without notice.

Seat Tube	Top Tube	Seat Angle	Head Angle	Chain Stay	Fork Rake	Wheel Base
48	52	74	73	41.0	4.5	95.40
50	53	73.5	73	41.0	4.5	95.98
52	54	73	73	41.0	4.5	96.52
54	55	73	73	41.0	4.5	97.52
55	55.5	72.5	73	41.0	4.5	97.52
56	56	72.5	73	41.0	4.5	98.01
57	56.5	72.5	73	41.0	4.5	98.50
58	57	72.5	73	41.0	4.5	99.99
59	58.5	72.5	73	41.0	4.5	100.48
60	59	72.5	73	41.0	4.5	100.97
62	60	72	73	41.5	4.5	101.90
64	61	72	73	41.5	4.5	102.86

STOWE

BY PHASE 3 CYCLES

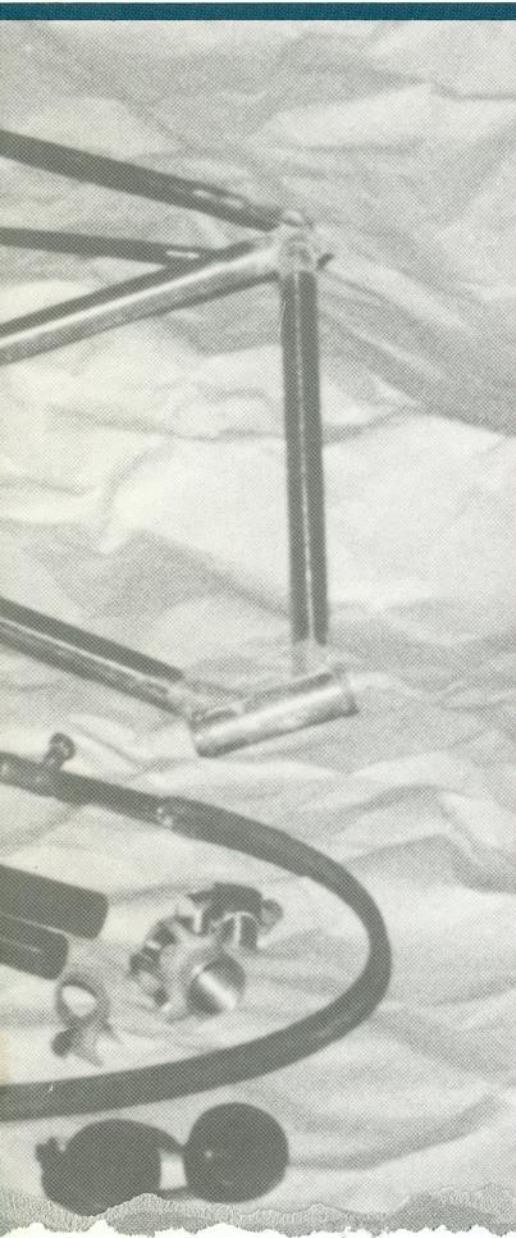

STOWE MOUNTAIN

A frame that is versatile by design, equally adapted to high performance trail riding as it is to all-out stage racing.

- Fillet brazed construction
- Seat stay brake mounting
- Columbus OR Tange Prestige tubing
- Any single color Imron paint (custom paint available)
- Dual large capacity water bottle mounts
- Slotted cable guides
- Limited production, completely handbuilt by Robert Stowe and Dale DuRoss

STANDARD DIMENSIONS:

Seatpost Diameter—26.8mm
Rear Spacing—130mm
Bottom Bracket—68mm Eng.
B.B. Drop—3.3cm
Fork Stem—22.2mm
Headset—26.4mm Eng.
B.B. Height—29.9cm
Chainstay Length—43.5cm
We recommend a long bottom bracket spindle such as Shimano Deore XT 122.5mm.

Specifications subject to change for improvement without notice.

Seat Tube	Top Tube	Seat Angle	Head Angle	Fork Rake	Wheel Base
44.5 (17.5")	56	72	70.5	4.8	104.53
48.3 (19")	57	72	70.5	4.8	105.64
52.1 (20.5")	58	72	70.5	4.8	106.74

Specifications subject to change for improvement without notice.

To place order, specify size by seat tube length in inches. English sizes 17.5", 19", 20.5". All dimensions in cm, center to center. Angles in degrees.



STOWE EXPRESS

This frame, specifically designed for time trialing, is exceptional in its ability to accelerate and climb while exhibiting a stable ride and easy handling.

- Fillet brazed construction
- Wishbone seat stay attachment
- Tange Prestige tubing
- Sloping top tube
- 26" front wheel
- Limited production, completely handbuilt by Robert Stowe and Dale DuRoss

STANDARD DIMENSIONS:

Seatpost Diameter—27.2mm
 Rear Spacing—126mm
 Bottom Bracket—68mm Eng.
 B.B. Drop—7.9cm Rear Drop
 Fork Stem—22.2mm
 Headset—26.4mm Eng.
 B.B. Height—25.7cm
 Chainstay Length—41.0cm
 Brake Reach—Short, Recessed Allen Type.


To place order, specify size by seat tube length in centimeters. All dimensions in cm, center to center. Angles in degrees.

Seat Tube	Top Tube	Seat Angle	Head Angle	Fork Rake	Wheel Base
52	53	73	73	4.0	95.00
54	54	73	73	4.0	96.00
56	55	73	73	4.0	97.00
58	57	73	73	4.0	99.00
60	58	73	73	4.0	100.00

Specifications subject to change for improvement without notice.

Phase 3 Cycles

140 Despatch Drive
 East Rochester, NY 14445
 716 381-6273

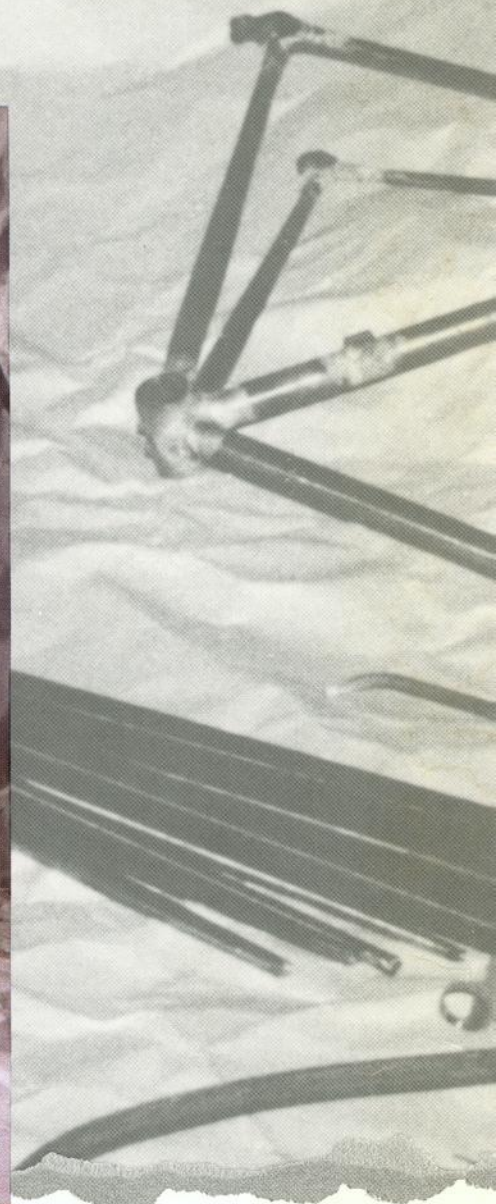

STOWE TETRA

This frame will be appreciated by the seasoned pro as well as the citizen rider. Versatile by design, from criterium to road race, this frame handles all without compromising ride or efficiency.

- All investment cast lug, shell and crown construction
- Investment cast socket style dropouts
- Columbus SL or SP
- Front derailleur braze-on
- Custom paint available
- Completely handbuilt by Robert Stowe and Dale DuRoss

STANDARD DIMENSIONS:

Seatpost Diameter—27.2mm
Rear Spacing—126mm (6 or 7SP)
Bottom Bracket—68mm Eng.
B.B. Drop—7.0cm
Fork Stem—22.2mm
Headset—26.4mm Eng.
B.B. Height—26.6cm
Chainstay Length—41.5cm
Brake Reach—Short, Recessed Allen Type.

To place order, specify size by seat tube length in centimeters. All dimensions in cm, center to center. Angles in degrees.

Specifications subject to change for improvement without notice.

Seat Tube	Top Tube	Seat Angle	Head Angle	Fork Rake	Wheel Base
48	51	75	73	4.5	96.22
50	53	74	73	4.5	97.38
52	53	73.5	73.5	4.2	96.21
54	54	73.5	73.5	4.2	97.21
55	54.5	73	73.5	4.2	97.21
56	55	73	73.5	4.2	97.70
57	56	73	73.5	4.2	98.69
58	57	73	73.5	4.2	99.68
59	57.5	73	73.5	4.2	100.18
60	58	73	73.5	4.2	100.67
62	59	73	73.5	4.2	101.08
64	61	73	73.5	4.2	103.05