



KALLOY INDUSTRIAL CO., LTD (TAIWAN)

No.186, Dazhou Rd., Shengang Dist.,
Taichung City 429, Taiwan
Tel +886 4 2525 0555
Fax +886 4 2527 4838

AK TECH CO., LTD (CHINA)


Puxin Road, Puxin Village, Lilin Town,
Zhongkai High-tech District, Huizhou City
Tel +86 752 3869858
Fax +86 752 3868577

KING-WAY CO., LTD (VIETNAM)

Lot 8-3,8-4, 3A,
Protrade International Industrial Park, An Tay Ward, TX,
Ben Cat, Binh Duong Province, Vietnam .

www.kalloyuno.com

© 2024 Kalloy Industrial Co.,Ltd. All rights reserved. The  are registered trademarks of Kalloy Industrial Co.,Ltd.
Specifications are subject to change for improvement without notice.

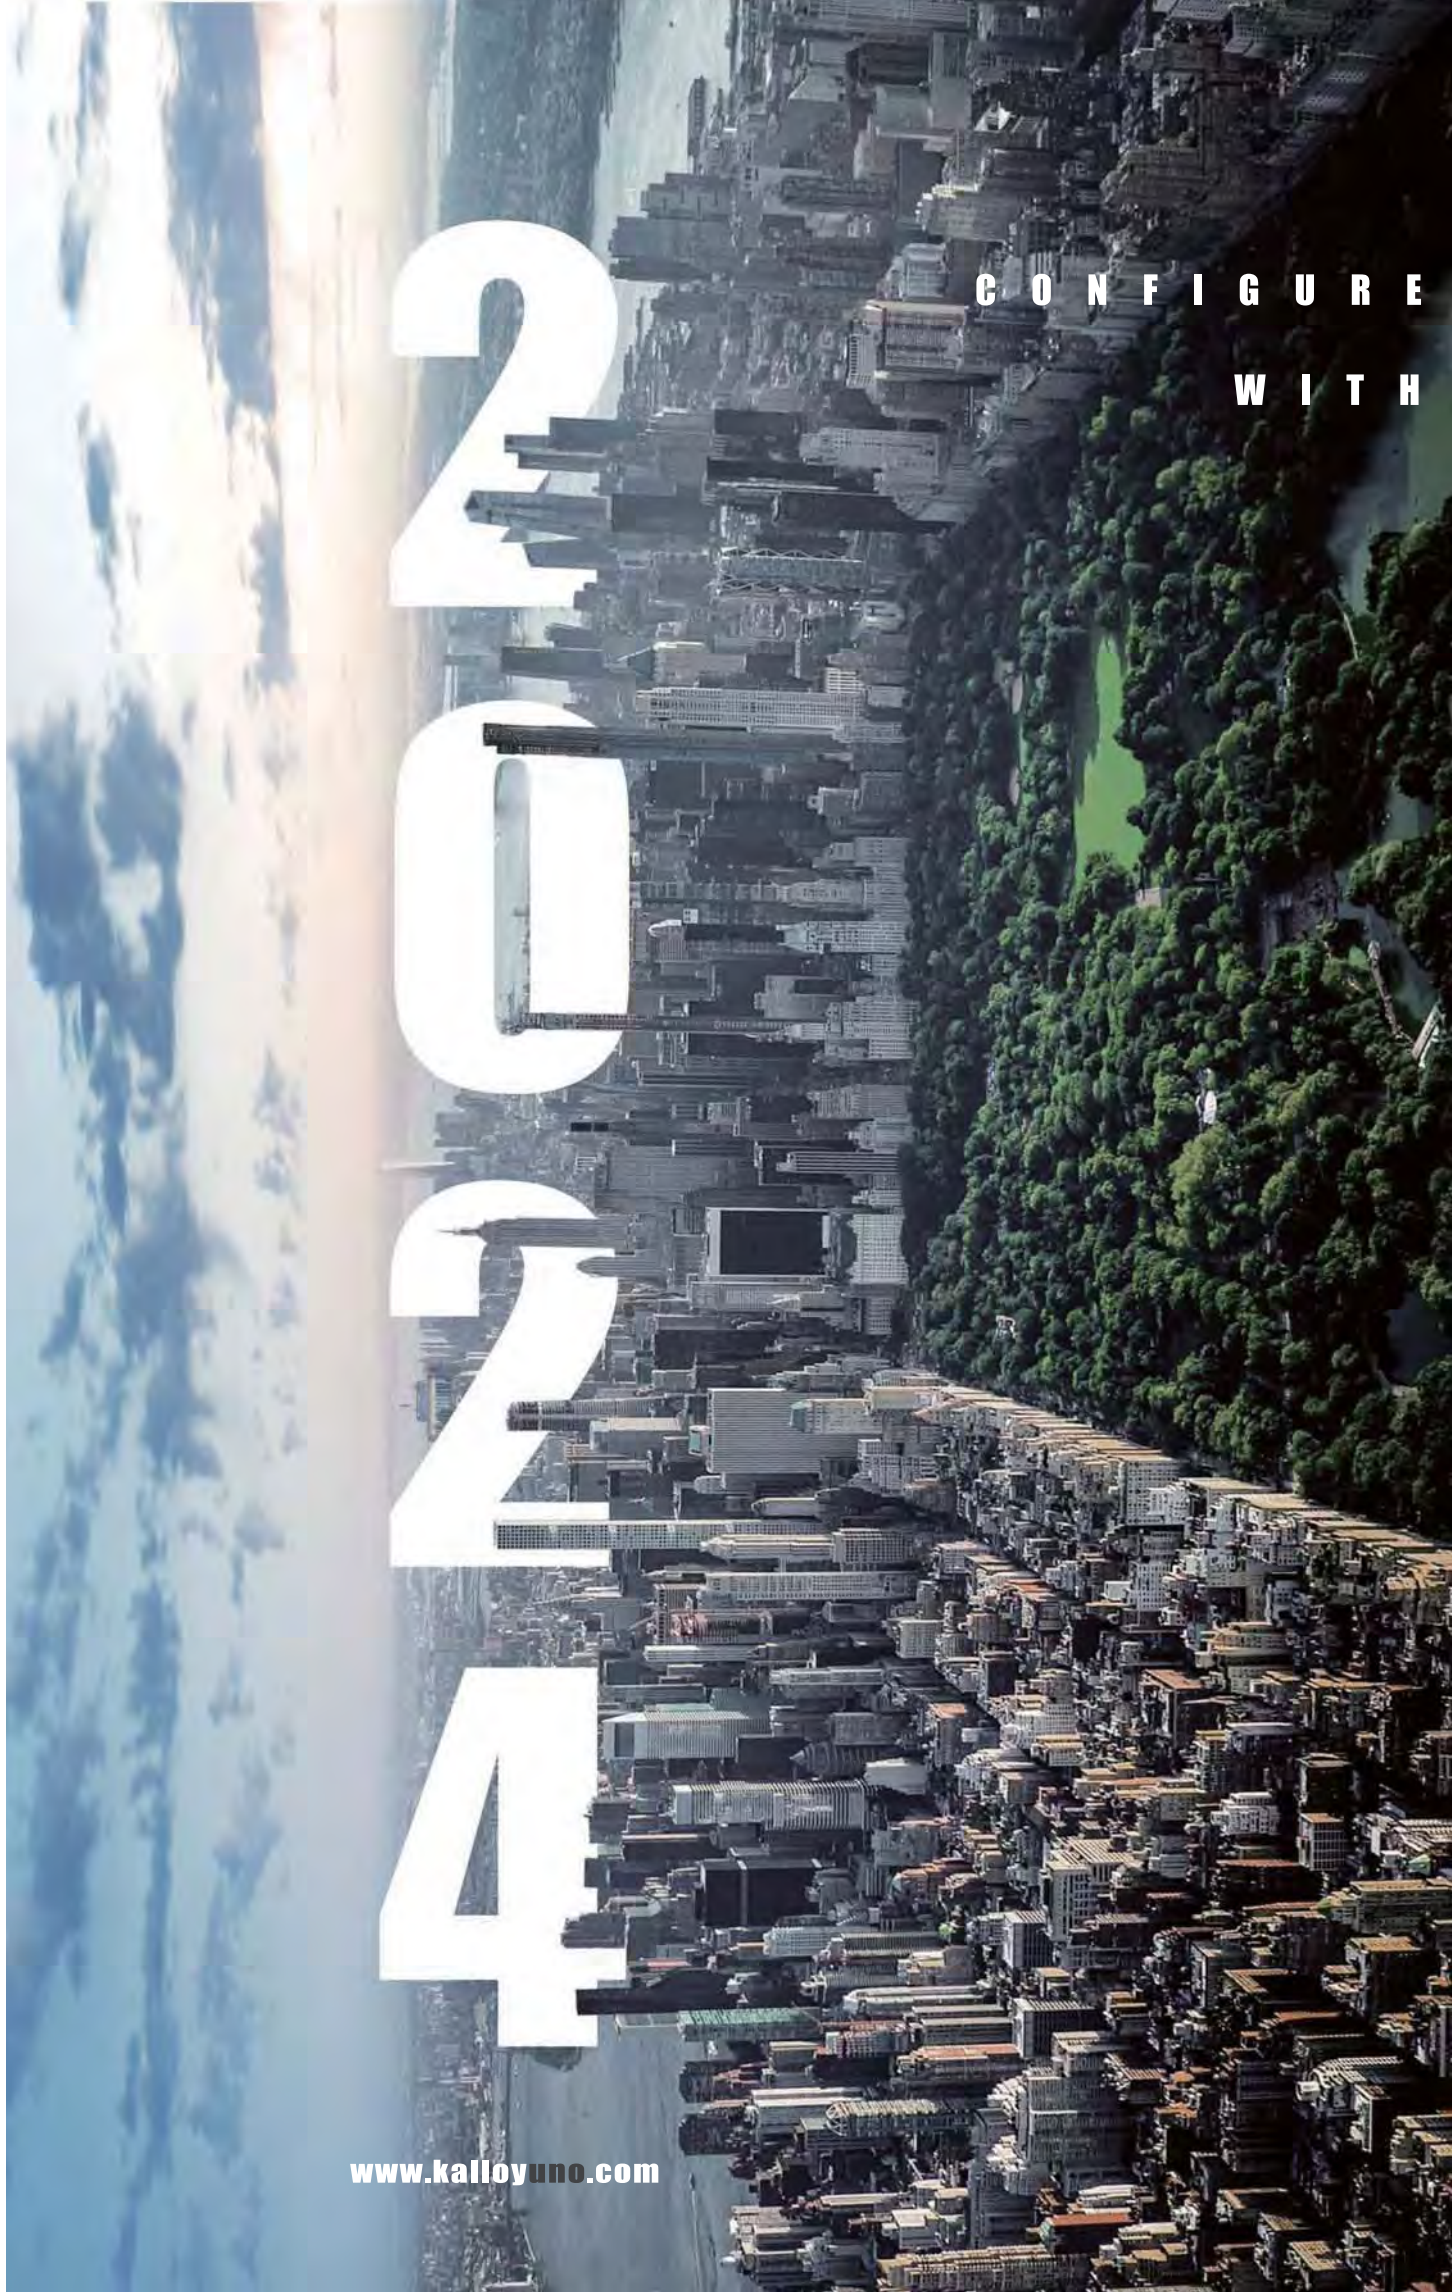

CONFIGURE
WITH

UNO

www.kalloyuno.com

SINCE

1980

Since 1980, Kalloy Taiwan has been a leading manufacturer of excellent quality aluminum components now. In addition to OE bicycle parts of stem, seatpost, handlebar and others, Kalloy makes leisure and sporting goods to the same unrelenting professional standards, like sporting E-wheelchair, walking stick, etc.

We select high grade materials including carbon fibers and aluminum and constantly upgrade our manufacturing and production skills.

Behind our manufacturing success and the support of China factory, funded in FEB 1993, lie a strenuous commitment to create, as artists, components of real and lasting value which undoubtedly satisfy our customers throughout the world. Now, especially to meet the demand of EU customers with dumping issue, the Vietnam factory is also under construction.

Whether your choice of components is 3D forged, melt forged or cold forged, you will be impressed by the precision and workmanship of the products in UNO.

Skilled spectra analysis and dynamic bump tests ensure the best quality possible.

In keeping with the Kalloy spirit, we focus on guaranteed quality and excellent customer service remains unchanged.



CONTENTS

02 STEM

15 ADJUSTABLE STEM

20 SEATPOSTS

34 ROAD BAR

44 MTN BAR

50 HANDLE BAR

51 TREKKING BAR

56 BARENDS

58 CLAMPS

62 UBS Series

64 HD Series



STEFANO



RIGID

ADJUSTABLE

FOLDABLE



ASA106

ISO 4210 - R/M approved

3D forged, 7050-T6 aluminum

Ext.: 60/70/80/90/100/110/120/130mm

Angle: +/-7degree

Diameter: 31.8mm

Steerer: 28.6mm

Height: 40mm

Weight: 116g(100mm)



ASA105 ASA105N

ISO 4210 - R/M approved

3D forged, 7050-T6 aluminum

Ext.: 60/70/80/90/100/110/120/130mm(+/-7degree)

80/90/100/110/120/130mm(+/-17degree)

Angle: +/-7degree , +/-17degree

Diameter: 31.8mm

Steerer: 28.6mm

Height: 40mm

Weight: 98g(ASA105 80mm)

100g(ASA105N 80mm)



ASA105



ASA105N



A5029

ISO 4210 - R/M approved

3D forged, 6061-T6 aluminum

Ext.: 60/70/80/90/100/110/120/130mm

Angle: +/-7degree

Diameter: 31.8mm

Steerer: 28.6mm

Height: 40mm

Weight: 117g(90mm)



A5025 A5025N

ISO 4210 - R/M approved

3D forged, 6061-T6 aluminum

Ext.: 60/70/80/90/100/110/120/130mm(+/-7degree)

80/90/100/110/120mm(+/-17degree)

Angle: +/-7degree , +/-17degree

Diameter: 31.8mm

Steerer: 28.6mm

Height: 40mm

Weight: 100g(AS025 90mm)

103g(AS025N 90mm)



A5025



A5025N



ASNRI

ISO 4210-R/M approved

3D forged, 6061-T6 aluminum

Ext.: 60/70/80/90/100/110/120/130mm

Angle: +/-7degree

Diameter: 31.8mm

Steerer: 28.6mm


Height: 40mm

Weight: 120g(90mm)




AS351

ISO 4210 - M approved
3D forged, 6061-T6 aluminum
Ext.: 60/70/80/90/100/110/120mm
Angle: +/-7degree
Diameter: 35.0mm
Steerer: 28.6mm
Height: 40mm
Weight: 159g(90mm)



ASM02

ISO 4210 - M approved
3D forged, 6061-T6 aluminum
Ext.: 70/80/90/100/110/120mm
Angle: -7degree
Diameter: 35.0mm
Steerer: 28.6mm
Height: 40mm
Weight: 139g(90mm)



ASM04

ISO 4210 - M approved
3D forged, 6061-T6 aluminum
Ext.: 35/45/55mm
Angle: 0degree
Diameter: 35.0mm
Steerer: 28.6mm
Height: 40mm
Weight: 124g(45mm)



ASM01 ASM01N

ISO 4210 - M approved
3D forged, 6061-T6 aluminum
Ext.: 60/70/80/90/100/110/120/130mm(7 degree)
50/60/70/80/90/100/110/120/130mm(-7 degree)
Angle: +/-7degree
Diameter: 31.8mm
Steerer: 28.6mm
Height: 40mm
Weight: 143g(ASM01 80mm)
148g(ASM01N 90mm)



ASM01



ASM01N



ASM03

ISO 4210 - M approved
3D forged, 6061-T6 aluminum
Ext.: 35/45/55/65mm
Angle: 0degree
Diameter: 31.8mm
Steerer: 28.6mm
Height: 40mm
Weight: 125g(45mm)



ASM05

ISO 4210 - M approved
Die cast
Ext.: 35/45/55mm
Angle: 0degree
Diameter: 31.8mm
Steerer: 28.6mm
Height: 40mm
Weight: 145g(45mm)

AS034**ISO 4210 - M approved**

3D forged, 6061-T6 aluminum

Ext.: 70/80/90/100/110/120mm

Angle: -7degree

Diameter: 31.8mm

Steerer: 28.6mm

Height: 30mm

Weight: 184g(L:90mm)

**AS031****ISO 4210 - R/M approved**

3D forged, 6061-T6 aluminum

Ext.: 60/70/80/90/100/110/120mm

Angle: +/-7degree

Diameter: 31.8mm

Steerer: 28.6mm

Height: 34mm(+7degree)

35mm(-7degree)

Weight: 195g(90mm)

**AS030
AS030H****ISO 4210 - M approved**

3D forged, 6061-T6 aluminum

Ext.: 70/80/90/100/110mm

Angle: 25degree

Diameter: 31.8mm

Steerer: 28.6mm

Height: 50mm

Weight: 174g(AS030 90mm)
171g(AS030H 90mm)

AS030



AS030H

**AS027
AS027N****ISO 4210 - M approved**

3D forged, 6061-T6 aluminum

Ext.: 60/70/80/90/100/110/120/130mm

Angle: +/-7degree

Diameter: 31.8mm

Steerer: 28.6mm

Height: 40mm

Weight: 131g(AS027 90mm)
126g(AS027N 90mm)

AS027



AS027N

**AS018****ISO 4210 - M approved**

3D forged, 6061-T6 aluminum

Ext.: 90/100/110/120/130mm

Angle: 7degree

Diameter: 31.8mm

Steerer: 28.6mm

Height: 41mm

Weight: 132g(90mm)

**AS007N****ISO 4210 - R/M approved**

3D forged, 6061-T6 aluminum

Ext.: 60/70/80/90/100/110/120/130mm(7degree x25.4/26.0mm)

60/70/80/90/100/110/120/130mm(7/17degree x31.8mm)

60/70/80/90/100/110mm(12degree x31.8mm)

Angle: 7/12/17degree

Diameter: 25.4/26.0/31.8mm

Steerer: 25.4/28.6mm

Height: 40mm

Weight: 134g(90mm x 7degree)



12 degree



17 degree



AS032

ISO 4210 - M approved
2D forged, 6061-T6 aluminum
Ext.: 35/45mm
Angle: 0degree
Diameter: 31.8mm
Steerer: 28.6mm
Height: 40mm
Weight: 176g(45mm)



AS033

ISO 4210 - M approved
2D forged, 6061-T6 aluminum
Ext.: 35/45mm
Angle: 0degree
Diameter: 35.0mm
Steerer: 28.6mm
Height: 42mm
Weight: 190g(45mm)



G502

ISO 4210 - M approved
CNC machined, 6061-T6 aluminum
Ext.: 40mm
Angle: 15degree
Diameter: 31.8mm
Steerer: 28.6mm
Height: 38mm
Weight: 202g

AS021

ISO 4210 - M approved
2D forged, 6061-T6 aluminum
Ext.: 70/90/110mm
Angle: 35degree
Diameter: 31.8mm
Steerer: 28.6mm
Height: 41mm
Weight: 161g(L:90mm)



AS020

ISO 4210 - M approved
2D forged, 6061-T6 aluminum
Ext.: 50mm
Angle: 10degree
Diameter: 31.8mm
Steerer: 28.6mm
Height: 51mm
Weight: 226g



AS013

ISO 4210 - M approved
2D forged, 6061-T6 aluminum
Ext.: 60mm
Angle: 25degree
Diameter: 31.8mm
Steerer: 28.6mm
Height: 45mm
Weight: 193g



AS009

ISO 4210 - M approved
Forged, 6061-T6 aluminum
Ext.: 70/80/90/100/110/120/130mm(17degree)
60/75/90/110/120/135mm(35degree)
Angle: 17degree(3D forged)/35degree(2D forged)
Diameter: 25.4
Steerer: 25.4/28.6mm
Height: 41mm
Weight: 149g (90mm x 17degree)



17 degree



NEW

AS032T

ISO 4210 - M approved

2D forged, 6061-T6 aluminum

Face plate with light adapter

Ext.: 35/45mm

Angle: 0degree

Diameter: 31.8mm

Steerer: 28.6mm

Height: 40mm

Weight: 206g(45mm)



AS036

ISO 4210 - M approved

3D forged, 6061-T6 aluminum

Ext.: 70/80/90/100/110/120mm

Angle: +/-8degree, +/-16degree

Diameter: 31.8mm

Steerer: 28.6mm

Height: 44mm

Weight: 140g(90mm)

This stem includes one top cap and one bushings.

Provide Multi-positions for professional riding.

Eccentric±8 / ±16



AS7AD

ISO 4210 - M approved

3D forged, 6061-T6 aluminum

Ext.: 70/80/90/100/110/120mm

Angle: +/-8degree, +/-12degree, +/-16degree

Diameter: 31.8mm

Steerer: 28.6mm

Height: 44mm

Weight: 142g(90mm)

This stem includes one top cap and two bushings.

Provide Multi-positions for professional riding.

Regular±12



Eccentric±8 / ±16



ASUP01

ISO 4210 - M approved

3D forged, 6061-T6 aluminum

Steerer: 28.6mm

Height: 120mm

Stem adjuster: 5mm thick(4 spacer)

10mm thick(1 spacer)


Weight: 210g



B4 Golden



B11 Blue



B18 Red



PARTS1

Spacer:28.8mmx35mm

Spacer Height: 5/10/20mm



G504

2D forged, 6061-T6 aluminum

Ext.: 43.6mm

Angle: 25degree

Diameter: 31.8mm

Weight: 208g



AS3300

ISO 4210 - M approved

Die cast
Ext.: 45mm
Angle: 15degree
Diameter: 25.4mm
Steerer: 28.6mm
Height: 40mm
Weight: 140g



ASDC1 ASDC1N

ISO 4210 - M approved

Die cast
Ext.: 60/75/90/105/120mm
Angle: 7degree
Diameter: 31.8mm
Steerer: 28.6mm
Height: 42mm
Weight: 179g(ASDC1 75mm)
178g(ASDC1N 75mm)



AS601 AS601N

ISO 4210 - M approved

Die cast
Ext.: 70/90/105/120mm(AS601 7degree x25.4mm)
60/75/90/105/120mm(AS601 15degree x25.4mm)
60/75/90/105/120mm(AS601/AS601N 7degree x31.8mm)
Angle: 7degree(AS601/AS601N)/15degree(AS601)
Diameter: 25.4mm(AS601)/31.8mm(AS601/AS601N)
Steerer: 28.6mm
Height: 40mm(25.4mm)/44mm(31.8mm)
Weight: 213g(AS601 90mm x 7degree)
194g(AS601N 90mm x 7degree)



AS6028

ISO 4210 - M approved

Die cast
Ext.: 60/75/90/105/120/135mm
Angle: 15degree
Diameter: 25.4mm
Steerer: 28.6mm
Height: 41mm
Weight: 196g(90mm)



AS6030

ISO 4210 - C approved

Die cast
Ext.: 90/105/120mm(+/-15degree)
90/110mm(30degree)
Angle: +/-15degree, 30degree
Diameter: 25.4mm
Steerer: 25.4/28.6mm
Height: 41mm
Weight: 188g(90mmx30degree)



15 degree

30 degree



KL

ISO 4210 - C approved

Die cast

Ext.: 60/80/100mm

Angle: -18degree

Diameter: 25.4/26.0mm

Steerer: 22.2mm

Length: 150/180mm

180mm is not available in ext. 100mm

Weight: 359g(25.4mmx100mm)



AL231

ISO 4210 - C approved

Die cast

Ext.: 80/100mm

Angle: 30degree

Diameter: 25.4mm

Steerer: 22.2/25.4mm

Length: 150/180mm

Weight: 340g(80mm x 180mm)



AL222

ISO 4210 - C approved

Die cast

Ext.: 60/80/100/120mm

Angle: 25degree

Diameter: 25.4mm

Steerer: 22.2mm

Length: 150/180/210mm(60mm)

135/180mm(80mm)

145/180mm(100mm)

135mm(120mm)

Weight: 363g(60mm x 180mm)



AL219

ISO 4210 - C approved

Die cast

Ext.: 65mm

Angle: 48degree

Diameter: 25.4mm

Steerer: 22.2mm

Length: 140/180/220mm

Weight: 336g(180mm)

ADJUSTABLE

NEW

A54006

ISO 4210 - M approved

EN 15194 (E-CITY)

Internal Cable Routing

3D forged angle adjustable stem

Ext.: 80mm

Angle: 0~60degree

Diameter: 31.8mm

Steerer: 28.6mm

Height: 80mm+20mm

Weight: 445g



A54003

ISO 4210 - M approved

EN 15194 (E-CITY)

Internal Cable Routing

3D forged angle adjustable stem

Ext.: 110mm


Angle: 0~60degree

Diameter: 31.8mm

Steerer: 28.6mm

Height: 42mm

Weight: 318g



A54005

ISO 4210 - C approved

EN 15194 (E-CITY)

3D forged angle adjustable stem

Ext.: 65/80mm

Angle: 0~60degree

Diameter: 31.8mm

Steerer: 28.6mm

Height: 50mm

Weight: 324g(80mm)



A54001

ISO 4210 - C approved

3D forged angle adjustable stem

Ext.: 95/110mm

Angle: 0~60degree

Diameter: 31.8mm

Steerer: 25.4(shim)/28.6mm

Height: 40mm

Weight: 270g(95mm)

AS4002

ISO 4210 - C approved
EN 15194 (E-CITY)

2D forged angle adjustable stem
Ext.: 90/100/110mm
Angle: 10/30/50degree
Diameter: 31.8mm
Steerer: 28.6mm
Height: 39mm
Weight: 343g(90mm)



AS832

ISO 4210 - C approved

2D forged angle adjustable stem
Ext.: 90/110mm
Angle: 0~60degree
Diameter: 31.8mm
Steerer: 28.6mm
Height: 41mm
Weight: 376g(90mm)



AS831

ISO 4210 - C approved
EN 15194 (E-CITY)

2D forged angle adjustable stem
Ext.: 90/110mm
Angle: 0~60degree
Diameter: 31.8mm
Steerer: 28.6mm
Height: 37mm
Weight: 393g(90mm)



AS820

ISO 4210 - M approved

2D forged angle adjustable stem
Ext.: 90/110/130mm(25.4mm)
95/110/125mm(31.8mm)
Angle: 0~60degree
Diameter: 25.4/31.8mm
Steerer: 25.4(shim)/28.6mm
Height: 35mm
Weight: 265g(28.6mm x 95mm)



AL820

ISO 4210 - C approved
EN 15194 (E-CITY)

2D forged angle adjustable stem with quill
Ext.: 80/100/120mm(25.4mm)
85/100/115mm(31.8mm)
Angle: 0~60degree
Diameter: 25.4/31.8mm
Steerer: 22.2/25.4mm
Length: 150/180mm
Weight: 451g(25.4mm x 85mm)

NEW

A57301

ISO 4210 - C approved

Die cast angle adjustable stem
Ext.: 90/110mm
Angle: 0~60degree
Diameter: 31.8mm
Steerer: 28.6mm
Height: 40mm
Weight: 338g(110mm)



NEW

AL7301

ISO 4210 - C approved

Die Cast angle adjustable stem with quill
Ext.: 75/95mm
Angle: 0~60degree
Diameter: 31.8mm
Steerer: 25.4mm
Length: 180/220mm
Weight: 480g(95mm x 180mm)



DIE CAST



A57300

ISO 4210 - C approved

Die cast angle adjustable stem
Ext.: 90/110mm
Angle: 0~60degree
Diameter: 31.8mm
Steerer: 28.6mm
Height: 40mm
Weight: 318g(90mm)

220



A5828

ISO 4210 - C approved

Die cast angle adjustable stem
Ext.: 95/115mm
Angle: 0~60degree
Diameter: 25.4mm
Steerer: 28.6mm
Height: 35mm
Weight: 269g(95mm)



AL828

ISO 4210 - C approved

Die cast angle adjustable stem with quill
Ext.: 90/110mm
Angle: 0~60degree
Diameter: 25.4mm
Steerer: 22.2/25.4mm
Length: 150/180mm
Weight: 458g(25.4mm x 90mm)



A5822

ISO 4210 - C approved

Die cast angle adjustable stem
Ext.: 90/110/130mm
Angle: 0~60degree
Diameter: 25.4mm
Steerer: 25.4(shim)/28.6mm
Height: 40mm
Weight: 305g(90mm)



AL822

ISO 4210 - C approved

Die Cast angle adjustable stem with quill
Ext.: 80/100/120mm
Angle: 0~60degree
Diameter: 25.4mm
Steerer: 22.2/25.4mm
Length: 150/180mm
Weight: 486g(25.4mm x 80mm)



A5809

ISO 4210 - C approved



Die cast angle adjustable stem
Ext.: 110/130mm
Angle: -10~50degree
Diameter: 25.4mm
Steerer: 25.4(shim)/28.6mm
Height: 40mm
Weight: 360g(25.4mm x 28.6mm x 110mm)



AL809

ISO 4210 - C approved


Die cast angle adjustable stem with quill
Ext.: 90/110mm
Angle: 0~60degree
Diameter: 25.4mm
Steerer: 22.2/25.4mm
Length: 150/180mm
Weight: 518g(25.4mm x 90mm)

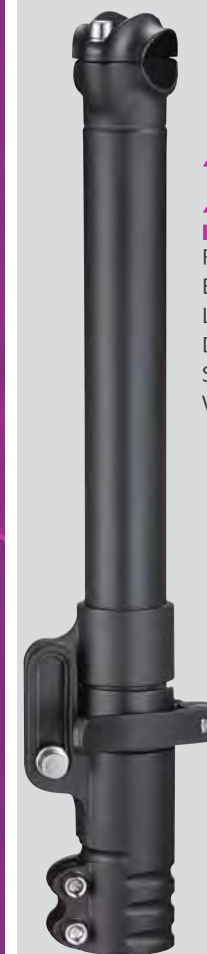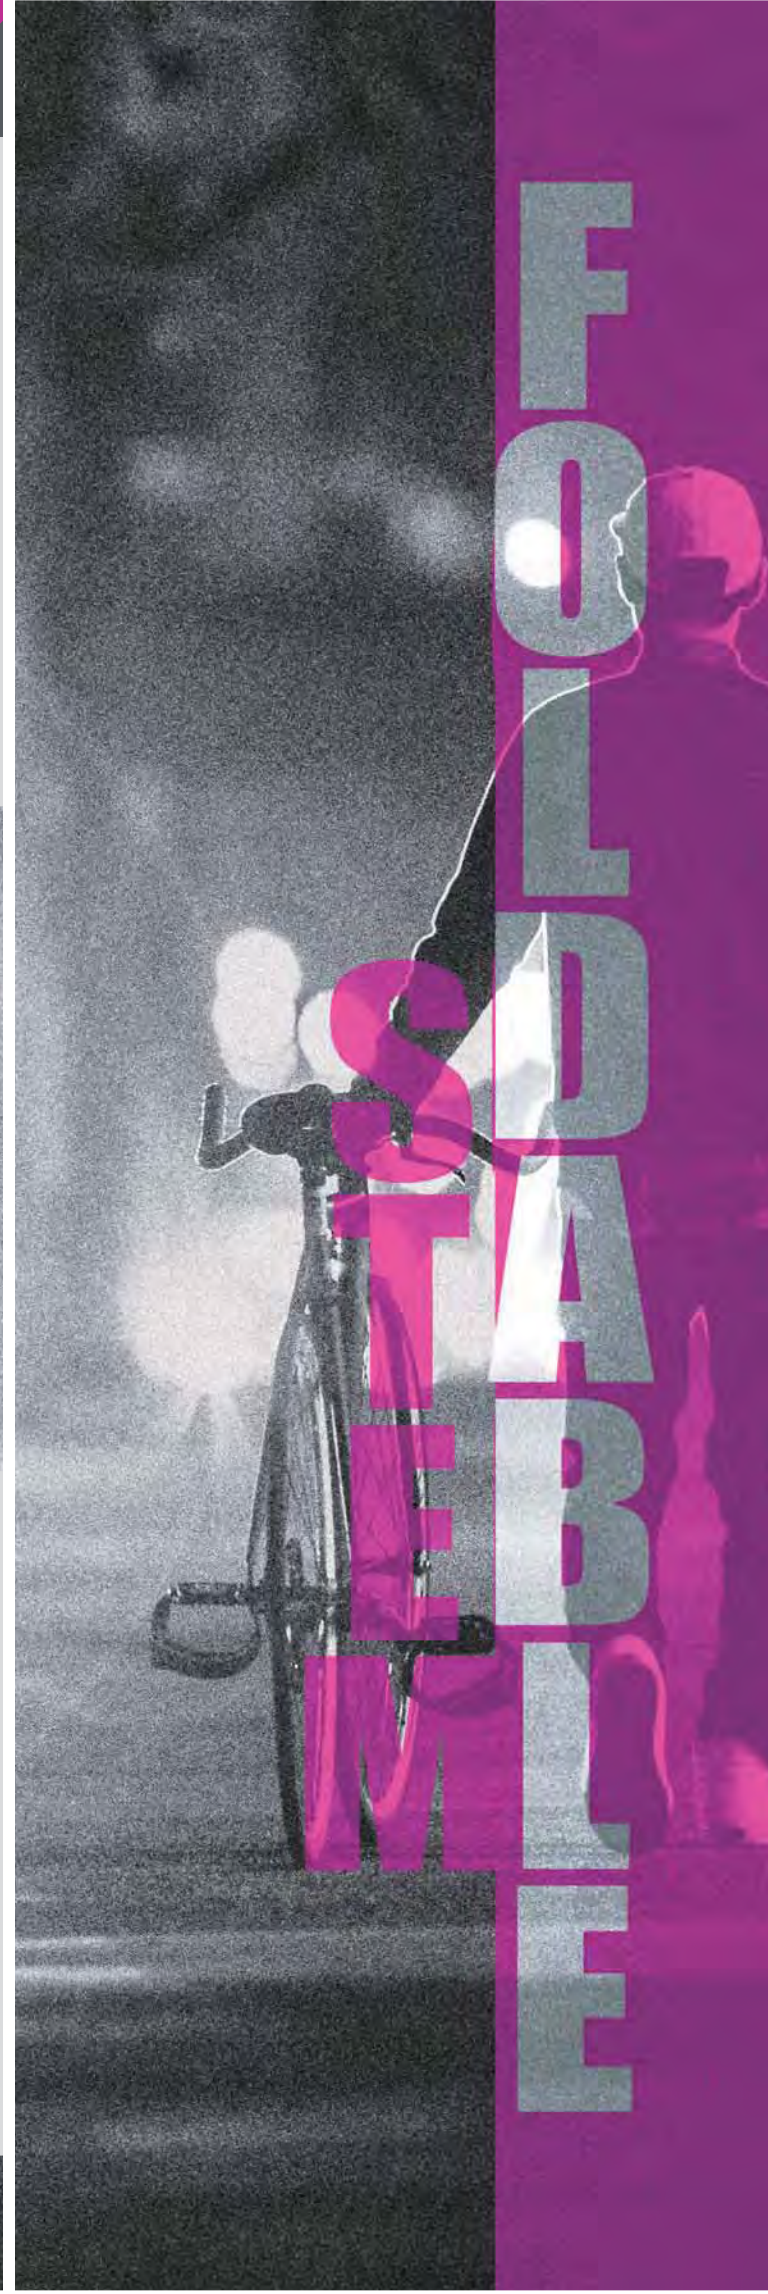

ASF102L ASF102R

ISO 4210 - C approved

Folding stem, 6061-T6 aluminum
Ext.: 300/350/400mm
Length: 45mm
Diameter: 25.4mm
Steerer: 28.6mm
Weight: 542g(350mm)



ALF102L ALF102R

ISO 4210 - C approved


Folding stem, 6061-T6 aluminum
Ext.: 300/350/400mm
Length: 100mm
Diameter: 25.4mm
Steerer: 22.2/25.4mm
Weight: 615g(350mm)



ALF103L ALF103R

ISO 4210 - C approved

Folding stem, 6061-T6 aluminum
Ext.: 300/350/400mm
Length: 100mm
Steerer: 25.4mm
Weight: 504g(350mm)



SEATPOSTS RIGID



QTSP01

ISO 4210 - R/M approved
Carbon fiber(3K/UD)
Diameter: 27.2/30.9/31.6mm
Length: 250/300/350/400mm(27.2mm)
300/350/400mm(30.9/31.6mm)
Offset: 0mm
Weight: 175g(31.6mmx350mm)



QTSP03

ISO 4210 - R/M approved
Alloy clamps with carbon shaft(3K/UD)
Diameter: 27.2/30.9/31.6mm
Length: 300/350/400mm
Offset: 0mm
Weight: 204g(31.6mmx350mm)



SPU01

ISO 4210 - R/M approved
2D forged head, carbon fiber shaft
Diameter: 27.2/30.9/31.6mm
Length: 300/350/400mm
Offset: 10mm
Weight: 280g(31.6mmx350mm)



SPU02

ISO 4210 - R/M approved
2D forged head, carbon fiber shaft
Diameter: 27.2/30.9/31.6mm
Length: 300/350/400mm
Offset: 0mm
Weight: 284g(31.6mmx350mm)



SPC619(CH) SPU619(TW)

ISO 4210 - R/M approved
2D forged head, carbon fiber shaft
Diameter: 27.2/30.9/31.6mm
Length: 300/350/400mm
Offset: 10mm
Weight: 273g(SPC619 27.2mm x 350mm)
266g(SPU619 27.2mm x 350mm)



SPC620(CH) SPU620(TW)

ISO 4210 - R/M approved
2D forged head, carbon fiber shaft
Diameter: 27.2/30.9/31.6mm
Length: 300/350/400mm
Offset: 24mm
Weight: 230g(SPC620 27.2mm x 300mm)



SPC612N(CH) SPU612N(TW)

ISO 4210 - R/M approved
2D forged head, carbon fiber shaft
Diameter: 27.2/30.9/31.6mm
Length: 300/350/400mm
Offset: 15mm
Weight: 302g(SPC612N 31.6mm x 350mm)

UNO



SP729
ISO 4210 - R/M approved
3D forged one-piece, 7050-T6 shaft
Diameter: 27.2/30.9/31.6mm
Length: 300/350/400mm
Offset: 10mm
Weight: 277g(31.6mmx350mm)

SP713N
ISO 4210 - R/M approved
3D forged one-piece, 2014-T6 shaft
Diameter: 27.2/30.9/31.6mm
Length: 300/350/400mm
Offset: 15mm
Weight: 294g(31.6mm x 350mm)



SPF2015
ISO 4210 - R/M approved
2D forged head, 2014-T6 shaft
Diameter: 27.2/30.9/31.6mm
Length: 300/350/400mm
Offset: 0mm
Weight: 260g(31.6mmx350mm)



SP629
ISO 4210 - R/M approved
2D forged head, 2014-T6 shaft
Diameter: 27.2/30.9/31.6mm
Length: 300/350mm
Offset: 10mm
Weight: 287g(31.6mmx350mm)



SP613N
ISO 4210 - R/M approved
2D forged head, 2014-T6 shaft
Diameter: 27.2/30.9/31.6mm
Length: 300/350mm
Offset: 15mm
Weight: 300g(30.9mm x 350mm)



SP376
ISO 4210 - R/M approved
3D forged one-piece, 2014-T6 oval shaft
Diameter: 27.2/30.9/31.6mm
Length: 300/350/400mm
Offset: 25mm
Weight: 307g(31.6mmx350mm)



SP358
ISO 4210 - R/M approved
3D forged one-piece, 2014-T6 oval shaft
Diameter: 27.2/30.9/31.6mm
Length: 300/350/400mm
Offset: 0mm
Weight: 271g(31.6mmx350mm)



SP369
ISO 4210 - R/M approved
2D forged head, 2014-T6 shaft
Diameter: 27.2/30.9/31.6mm
Length: 300/350mm
Offset: 0mm
Weight: 272g(31.6mmx350mm)



SP267
ISO 4210 - R/M approved
2D forged head, 2014-T6 shaft
Diameter: 27.2/30.9/31.6mm
Length: 300/350mm
Offset: 17mm
Weight: 288g(31.6mm x 350mm)



SEATPOSTS RIGID



SP3D1

ISO 4210 - R/M approved

3D forged one-piece, 6061-T6 shaft

Diameter: 27.2/30.9/31.6mm

Length: 300/350/400mm

Offset: 17mm

Weight: 349g(31.6mmx350mm)



SP3D2

ISO 4210 - R/M approved

3D forged one-piece, 6061-T6 shaft

Diameter: 27.2/30.9/31.6mm

Length: 300/350/400mm

Offset: 0mm

Weight: 329g(31.6mmx350mm)



SP700

ISO 4210 - R/M approved

3D forged one-piece, 6061-T6 oval shaft

Diameter: 26.6~27.2/29.8~31.8mm

Length: 300/350/400mm

Offset: 29mm

Weight: 294g(31.6mmx350mm)



SP375

ISO 4210 - R/M approved

3D forged one-piece, 6061-T6 oval shaft

Diameter: 26.6~27.2/29.8~31.8mm

Length: 300/350/400mm

Offset: 25mm

Weight: 332g(31.6mmx350mm)



SP719

ISO 4210 - R/M approved

3D forged one-piece, 6061-T6 shaft

Diameter: 27.2/30.9/31.6/34.9mm

Length: 300/350/400mm(27.2/30.9/31.6mm)

350/400mm(34.9mm)

Offset: 10mm

Weight: 286g(31.6mmx350mm)



SP712N

ISO 4210 - R/M approved

3D forged one-piece, 6061-T6 shaft

Diameter: 27.2/30.9/31.6mm

Length: 300/350/400mm

Offset: 15mm

Weight: 304g(31.6mm x 350mm)



SP342

ISO 4210 - R/M approved

3D forged one-piece, 6061-T6 oval shaft

Diameter: 25.4~27.2/28.6~31.6mm

Length: 300/350/400mm

Offset: 16mm

Weight: 312g(31.6mm x 350mm)



SEATPOSTS RIGID



SPF103

ISO 4210 - R/M approved
2D forged head, 6061-T6 shaft
Diameter: 27.2/30.9/31.6mm
Length: 300/350/400mm(27.2/30.9mm)
300/350/400/450mm(31.6mm)
Offset: 0mm
Weight: 314g(31.6mmx350mm)
Length 450mm is available for 31.6mm

SPF102

ISO 4210 - R/M approved
2D forged head, 6061-T6 shaft
Diameter: 27.2/30.9/31.6/34.9mm
Length: 300/350/400mm(27.2/30.9/31.6mm)
300/350/400/450mm(34.9mm)
Offset: 7mm
Weight: 340g(31.6mm x 350mm)



SP612N

ISO 4210 - R/M approved
2D forged head, 6061-T6 shaft
Diameter: 25.2~27.2/28.6~31.8mm
Length: 300/350/400mm
Offset: 15mm
Weight: 326g(31.6mm x 350mm)



SP368

ISO 4210 - R/M approved
2D forged head, 6061-T6 shaft
Diameter: 25.4~27.2/28.6~31.8mm
Length: 300/350/400mm
Offset: 0mm
Weight: 310g(31.6mmx350mm)



SPF101 (Hex Screw)

ISO 4210 - R/M approved
2D forged head, 6061-T6 shaft
Diameter: 30.9/31.6/34.9mm
Length: 350/400mm(30.9mm)
350/400/450mm(31.6/34.9mm)
Offset: 25mm
Weight: 465g(34.9mmx450mm)
424g(31.6mmx400mm)



SP619

ISO 4210 - R/M approved
2D forged head, 6061-T6 shaft
Diameter: 27.2/30.9/31.6mm
Length: 300/350/400mm
Offset: 10mm
Weight: 312g(31.6mmx350mm)



SP620

ISO 4210 - R/M approved
2D forged head, 6061-T6 shaft
Diameter: 27.2/30.9/31.6mm
Length: 300/350/400mm
Offset: 24mm
Weight: 277g(31.6mmx300mm)



SP341

ISO 4210 - R/M approved
2D forged head, 6061-T6 shaft
Diameter: 25.0~27.2/27.4~31.8mm
Length: 300/350/400mm
Offset: 14mm
Weight: 335g(31.6mm x 350mm)



SP265

ISO 4210 - R/M approved
2D forged head, 6061-T6 shaft
Diameter: 25.0~27.2/27.4~31.8mm
Length: 300/350/400mm
Offset: 17mm
Weight: 320g(31.6mm x 350mm)



SP248D


ISO 4210 - R/M approved
Forged one-piece, 6061-T6 shaft
Diameter: 25.0~27.2/27.4~31.8mm
Length: 300/350/400mm
Offset: 26mm
Weight: 344g(31.6mmx350mm)

SEATPOSTS RIGID



SPDC1 SPDC1J (Internal Cable)

ISO 4210 - R/M approved
Die cast head, 6061-T6 shaft
Diameter: 27.2/30.9/31.6mm
Length: 300/350/400mm
Offset: 5mm
Weight: 332g(SPDC1 31.6mmx350mm)
342g(SPDC1J 31.6mmx400mm)



SPDC1J



SPDC2

ISO 4210 - R/M approved
Die cast head, 6061-T6 shaft
Diameter: 27.2/30.9/31.6mm
Length: 300/350/400mm(27.2/31.6mm)
300/350/400/450mm(30.9mm)
Offset: 0mm
Weight: 331g(27.2mmx350mm)



SP602

ISO 4210 - R/M approved
Die cast head, 6061-T6 shaft
Diameter: 25.0~27.2/27.4~31.8mm
Length: 300/350/400mm
Offset: 24mm
Weight: 335g(31.6mmx350mm)

SP359

ISO 4210 - R/M approved
Die cast head, 6061-T6 shaft
Diameter: 25.0~27.2/27.4~31.8mm
Length: 300/350/400mm
Offset: 12mm
Weight: 349g(31.6mmx350mm)



SP353

ISO 4210 - R/M approved
Extruded head, 6061-T6 shaft
Diameter: 25.0~27.2/27.4~31.8mm
Length: 300/350/400mm
Offset: 16mm
Weight: 350g(31.6mm x 350mm)



SP200M

ISO 4210 - R/M approved
Diameter: 25.4~27.2/28.6~31.6mm
Length: 300/350/400mm
Weight: 198g(27.2mmx350mm)
SP200 all lathing



SEATPOSTS



SP380

ISO 4210 - C approved
MDU suspension seatpost
2D forged head, 6061-T6
Travel: 45mm
Diameter(Normal): 26.8/27.0/27.2mm
Diameter(Over): 30.0~31.6mm
Length: 300/350mm
Offset: 13mm
Weight: 493g(31.6mmx350mm)

SP383

ISO 4210 - C approved
MDU suspension seatpost
2D forged head, 6061-T6
Travel: 45mm
Diameter(Normal): 26.8/27.0/27.2mm
Diameter(Over): 30.0~31.6mm
Length: 300/350mm
Offset: 10mm
Weight: 512g(31.6mmx350mm)

SP503

ISO 4210 - C approved
Spring suspension seatpost
2D forged head, 6061-T6
Travel: 47mm
Diameter(Normal): 26.8/27.0/27.2mm
Diameter(Over): 30.0~31.6mm
Length: 300/350mm
Offset: 15mm
Weight: 585g(31.6mmx350mm)

SP505

ISO 4210 - C approved
Spring suspension seatpost
Extrusion, 6061-T6
Diameter(Normal): 26.8~27.0mm
Diameter(Over): 27.2mm
Length: 300/350mm
Weight: 384g(27.2mmx350mm)

SP379

ISO 4210 - C approved
MDU suspension seatpost
2D forged head, 6061-T6
Travel: 45mm
Diameter(Normal): 26.8/27.0/27.2mm
Diameter(Over): 30.0~31.6mm
Length: 300/350mm
Offset: 0mm
Weight: 500g(31.6mmx350mm)

SP382

ISO 4210 - C approved
MDU suspension seatpost
2D forged head, 6061-T6
Travel: 40mm
Diameter(Normal): 26.8/27.0/27.2mm
Diameter(Over): 30.0~31.6mm
Length: 300/350mm
Offset: 20mm
Weight: 365g(27.2mmx300mm)

SP500

ISO 4210 - C approved
Spring suspension seatpost
2D forged head, 6061-T6
Travel: 40mm
Diameter(Normal): 26.8~27.2mm
Diameter(Over): 30.0~31.6mm
Length: 300/350mm
Offset: 13mm
Weight: 511g(27.2mmx350mm)

SP504

ISO 4210 - C approved
Spring suspension seatpost
2D forged head, 6061-T6
Travel: 32mm
Diameter(Normal): 25.4~27.0/27.2mm
Diameter(Over): Shim for oversize
Length: 300/350mm
Offset: 13mm
Weight: 472g(27.2mmx350mm)

SP509

ISO 4210 - M approved
Spring suspension seatpost
2D forged head, 6061-T6
Travel: 45mm
Diameter(Normal): 26.8/27.0/27.2mm
Diameter(Over): 30.0~31.6mm
Length: 300/350mm
Offset: 10mm
Weight: 510g(27.2mmx350mm)



RADIAN

DROP
RISE
FLAT
CITY & OTHERS



HBL101

ISO 4210 - R approved

6061 D.B. racing bar

Barbore: 31.8mm

Drop: 125mm

Reach: 70mm

Width: 400/420/440/460mm

Ramp angle: 10degree

Flare angle: 6/12degree

Weight: 300g(420mm)



Aero



HBLOO1

ISO 4210 - R approved

6061 P.G. racing bar

Barbore: 31.8mm

Drop: 125mm

Reach: 70mm

Width: 400/420/440/460mm

Ramp angle: 10degree

Flare angle: 6/12degree

Weight: 370g(420mm)

HBL102

ISO 4210 - R approved

6061 D.B. racing bar

Barbore: 31.8mm

Drop: 125mm


Reach: 70mm

Width: 360/380/400/420/440/460mm

Ramp angle: 10degree

Flare angle: 6/12degree

Weight: 315g(420mm)

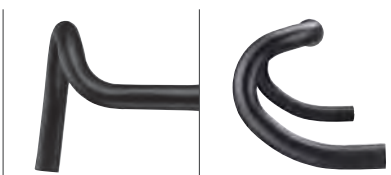

HBLOO2

ISO 4210 - R approved

6061 P.G. racing bar

Barbore: 31.8mm

Drop: 125mm


Reach: 78mm

Width: 400/420/440/460mm

Ramp angle: 20degree

Flare angle: 6/12degree

Weight: 430g(420mm)

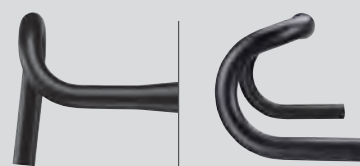

HBL103

ISO 4210 - R approved

6061 D.B. racing bar

Barbore: 31.8mm

Drop: 125mm


Reach: 78mm

Width: 400/420/440/460mm

Ramp angle: 20degree

Flare angle: 6/12degree

Weight: 315g(420mm)

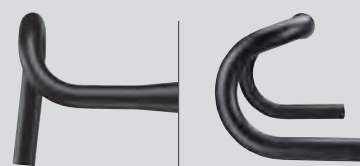

HBFL12

ISO 4210 - R approved

6061 D.B. racing bar

Barbore: 31.8mm

Drop: 125mm


Reach: 70mm

Width: 400/420/440/460mm

Ramp angle: 10degree

Flare angle: 20degree

Weight: 285g(420mm)

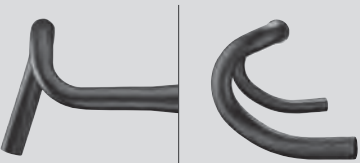

HBUB22

ISO 4210 - R approved

6061 D.B. racing bar

Barbore: 31.8mm

Drop: 100mm


Reach: 66mm

Width: 560mm

Ramp angle: 40degree

Flare angle: 11degree

Weight: 280g

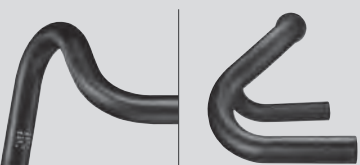

DROP BAR

COURSE SERIES



HBCR11

ISO 4210 - R approved

6061 P.G. racing bar

Barbore: 31.8mm

Drop: 125mm

Reach: 70mm

Width: 380/400/420/440mm

Weight: 435g(420mm)

Barbore: 31.8mm

Drop: 140mm

Reach: 90mm

Width: 380/400/420/440mm

Weight: 435g(400mm)



Drop/Reach 140/90

HB-CR12

ISO 4210-R approved

6061 D.B. racing bar

Barbore: 31.8mm

Drop: 125mm

Reach: 70mm

Width: 360/380/400/420

440/460/480mm

Weight: 300g(420mm)

Barbore: 31.8mm

Drop: 140mm

Reach: 90mm

Width: 380/400/420/440mm

Weight: 305g(400mm)



Drop/Reach 125/70

HB-CR13

ISO 4210-R approved

7050 D.B. racing bar

Barbore: 31.8mm

Drop: 125mm

Reach: 70mm

Width: 380/400/420/440mm

Weight: 285g(420mm)

Barbore: 31.8mm

Drop: 140mm

Reach: 90mm

Width: 400/420/440mm

Weight: 287g(420mm)



COURSE SL SERIES



HB-CR21

ISO 4210-R approved

6061 P.G. racing bar

Barbore: 26.0/31.8mm


Drop: 120mm

Reach: 75mm

Width: 360/380/400/420/440mm(26.0mm)

360/380/400/420/440/460mm(31.8mm)

Weight: 355g(380mm)

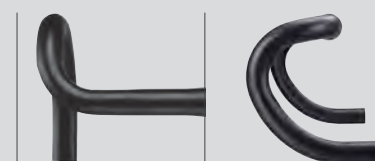

Drop/Reach 120/70

HB-CR22

ISO 4210-R approved

6061 D.B. racing bar


Barbore: 31.8mm

Drop: 120mm

Reach: 70mm

Width: 360/380/400/420/440/460mm

Weight: 285g(420mm)

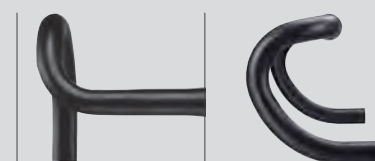

TEAM ERGO SERIES



HBTE11

ISO 4210 - R approved

6061 P.G. racing bar

Barbore: 26.0mm

Drop: 150mm

Reach: 80mm

Width: 380/400/420/440/460mm

Weight: 425g(420mm)


Barbore: 31.8mm

Drop: 144mm

Reach: 77mm

Width: 400/420/440mm

Weight: 425g(420mm)

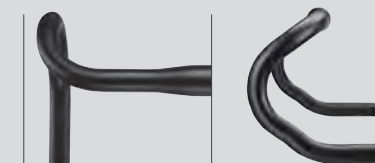

Drop/Reach 144/77

HBTE12

ISO 4210 - R approved

6061 D.B. racing bar


Barbore: 31.8mm

Drop: 144mm

Reach: 77mm

Width: 400/420/440mm

Weight: 320g(420mm)

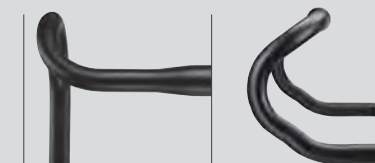



HBTM11

ISO 4210 - R approved

6061 P.G. racing bar
Barbore: 31.8mm
Drop: 131mm
Reach: 75mm
Width: 360/380/400/420/440mm
Weight: 425g(400mm)

HBTM12

ISO 4210 - R approved

6061 P.G. racing bar
Barbore: 31.8mm
Drop: 131mm
Reach: 84mm
Width: 380/400/420/440/460/480mm
Weight: 420g(400mm)

HBTM13

ISO 4210 - R approved

6061 D.B. racing bar
Barbore: 31.8mm
Drop: 131mm
Reach: 84mm
Width: 400/420/440mm
Weight: 320g(400mm)



Drop/Reach 131/84



HBTM21

ISO 4210 - R approved

6061 P.G. racing bar
Barbore: 31.8mm
Drop: 125mm
Reach: 72mm
Width: 380/400/420/440mm
Weight: 405g(420mm)

HBTM22

ISO 4210 - R approved

6061 P.G. racing bar
Barbore: 31.8mm
Drop: 142mm
Reach: 82mm
Width: 400/420/440mm
Weight: 400g(420mm)

HBTM23

ISO 4210 - R approved

6061 D.B. racing bar
Barbore: 31.8mm
Drop: 142mm
Reach: 82mm
Width: 400/420/440mm
Weight: 300g(420mm)




Drop/Reach 142/82



AERO SERIES

HBAR15


ISO 4210 - R approved
6061 D.B. racing bar
Barbore: 31.8mm
Drop: 125mm
Reach: 70mm
Width: 400/420/440mm
Weight: 285g(400mm)

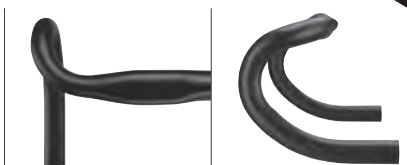

Aero

HBAR31

ISO 4210 - R approved
6061 D.B. racing bar
Barbore: 31.8mm
Drop: 130mm
Reach: 80mm
Width: 380/400/420/440mm
Weight: 340g(420mm)

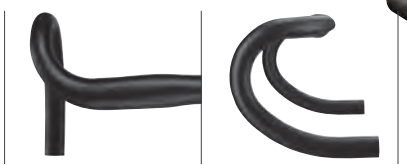

Aero

HBAR32

ISO 4210 - R approved
6061 D.B. racing bar
Barbore: 31.8mm
Drop: 125mm
Reach: 78mm
Width: 380/400/420mm
Weight: 352g(420mm)



Aero

CAMPUS SERIES


HBCM11

ISO 4210 - C approved
6061 P.G. racing bar
Barbore: 26.0mm
Drop: 150mm
Reach: 130mm
Width: 400/420/440mm
Weight: 440g(420mm)



HBCM21


ISO 4210 - C approved
6061 P.G. racing bar
Barbore: 26.0mm
Drop: 135mm
Reach: 80mm
Width: 400/420/440mm
Weight: 385g(420mm)

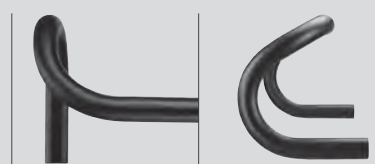

HBCM31

ISO 4210 - R approved
6061 P.G.
Barbore: 26.0/31.8mm
Drop: 170mm
Reach: 90mm
Width: 360/380/400/420/440mm(26.0mm)
380/400/420/440mm(31.8mm)
Weight: 407g(380mm)

Barbore: 26.0/31.8mm
Drop: 183mm
Reach: 108mm
Width: 360/380/400/420/440mm(26.0mm)
380/400/420/440mm(31.8mm)
Weight: 440g(420mm))

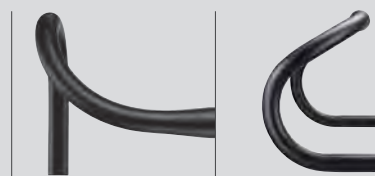

Drop/Reach 183/108



RISE BAR
FLAT TOP
FLAT BAR



QTSRBO2

ISO 4210 - M approved

Carbon rise bar
Barbore: 31.8mm
Rise: 18mm
Backsweep: 8degree
Width: 600/620/640/660/680/700/720/740/760/780mm
Weight: 182g(780mm)

M35 HB353

diameter

ISO 4210 - M approved

6061 D.B. rise bar
Barbore: 35.0mm
Rise: 15/25/35/45mm
Backsweep: 5/9degree
Width: 580/680/700/720/740/760/780/800mm(15/25/35mm)
580/680/700/720/740/760mm(45mm)
Weight: 315g(780mm)

GB03

ISO 4210 - M approved

7050 T.B. rise bar
Barbore: 31.8mm
Rise: 25/40mm
Backsweep: 9degree
Width: 680/700/720/740/760/780mm
Weight: 345g(700mm)

HBR100

ISO 4210 - M approved

6061 D.B. rise bar
Barbore: 31.8mm
Rise: 15mm
Backsweep: 5/9degree
Width: 580/600/620/640/660/680mm
Weight: 278g(640mm)

HBR100L

ISO 4210 - M approved

6061 T.B. rise bar
Barbore: 31.8mm
Rise: 15mm
Backsweep: 5/9degree
Width: 700/720mm
Weight: 300g(720mm)

HBRB11

ISO 4210 - M approved

6061 P.G. rise bar
Barbore: 25.4/31.8mm
Rise: 20/30mm(25.4mm)
10/15/25/35mm(31.8mm)
Backsweep: 6/9/12degree(25.4mm)
5/9/12degree(31.8x10/15mm)
5/9degree(31.8x25/35mm)
Width: 500/520/540/560/580/600/620/640/660/680mm(25.4mm)
560/580/600/620/640/660/680mm(31.8mm)
Weight: 375g(25.4x660mm)

HBRB11L

ISO 4210 - M approved

6061 P.G. rise bar
Barbore: 31.8mm
Rise: 10/15/25/35mm
Backsweep: 5/9degree
Width: 700/720mm(10mm)
700/720/740mm(15/25mm)
700/720/740/760mm(35mm)
Weight: 390g(720mm)

HBRB12

ISO 4210 - M approved

6061 D.B. rise bar
Barbore: 25.4/31.8mm
Rise: 25mm(25.4mm)
15/25mm(31.8mm)
Backsweep: 8degree(25.4x25mm)
5/9/15/25degree(31.8x15mm)
5/9/15degree(31.8x25mm)
Width: 500/520/540/560/600/620/640/660/680mm(25.4mm)
500/520/540/560/580/600/620/640/660/670/680mm(31.8mm)
Weight: 252g(25.4x660mm)

HBRB12L

ISO 4210 - M approved

6061 D.B. rise bar
Barbore: 31.8mm
Rise: 15/25mm
Backsweep: 5/9/15degree
Width: 700/720/740mm
Weight: 295g(720mm)

HBRB12W

ISO 4210 - M approved

6061 T.B. rise bar
Barbore: 31.8mm
Rise: 15/25/35mm
Backsweep: 5/9degree
Width: 700/720/740/760/780/800mm
Weight: 330g(780mm)

HBRB22

ISO 4210 - M approved

6061 D.B. rise bar
Barbore: 31.8mm
Rise: 10mm
Backsweep: 5/9/12degree
Width: 560/580/600/620/640/660/680/700/720/740mm
Weight: 295g(720mm)



HB352

ISO 4210 - M approved

6061 D.B. flat top

Barbore: 35.0mm

Backsweep: 5/9degree

Width: 620/640/660/680/700/720/740/760/780mm

Weight: 285g(720mm)

FLAT



HBFB21 HBFB21L HBFB21W

ISO 4210 - M approved

6061 D.B. flat top

Barbore: 31.8mm

Backsweep: 5/9degree

Width: 540/560/580/600mm(HBFB21)

620/640/660/680/700/720mm(HBFB21L)

730/740/760mm(HBFB21W)

Weight: 240g(600mm)



HBFB22 HBFB22L

ISO 4210 - M approved

7050 D.B. flat top

Barbore: 31.8mm

Backsweep: 5/9degree

Width: 560/580/600mm(HBFB22)

620/640/660/680/700/720mm(HBFB22L)

Weight: 290g(700mm)

20

ISO 4210 - M COVERS EN 15194 (E-CITY)



HB351

ISO 4210 - M approved

6061 D.B. flat bar

Barbore: 35.0mm

Backsweep: 5/9degree

Width: 620/640/660/680/700/720/740/760mm

Weight: 285g(720mm)



HBFB11 HBFB11L

ISO 4210 - M approved

6061 P.G. flat bar

Barbore: 25.4(HBFB11)

Backsweep: 5/9degree

Width: 500/520/540/560/580/600/620/640mm

Weight: 243g(580mm)

Barbore: 31.8

Backsweep: 0/5/9degree(HBFB11)

5/9degree(HBFB11L)

Width: 540/560/580/600mm(HBFB11)

620/640/660/680/700/720mm(HBFB11L)

Weight: 375g(720mm)



HBFB12 HBFB12L

ISO 4210 - M approved

6061 D.B. flat bar

Barbore: 25.4(HBFB12)

Backsweep: 5/9degree

Width: 500/520/540/560/580/600/620mm

Weight: 205g(580mm)

Barbore: 31.8

Backsweep: 5/9/12degree

Width: 540/560/580/600mm(HBFB12)

620/640/660/680/700/720/740mm(HBFB12L)

Weight: 235g(620mm)



HBD101 **NEW**

ISO 4210 - R approved

6061 D.B.

Barbore: 31.8mm

Width: 400/420/440/460mm

Weight: 316g(420mm)



HBUB12

ISO 4210 - C approved

EN 15194 (E-CITY)

6061 D.B.

Barbore: 31.8mm

Rise: 17mm

Backsweep: 15/30degree

Width: 660/680mm

Weight: 295g(660mm)



HBTR1

ISO 4210 - C approved

6061 P.G. trekking bar

Barbore: 25.4mm

Backsweep: 25degree

Width: 580/600/620/640/660/680 mm

Weight: 290g(640mm)



HBTR2

ISO 4210 - C approved

EN 15194 (E-CITY)

6061 P.G. trekking bar

Barbore: 31.8mm

Backsweep: 25/35/45degree

Width: 600/620/640/660/680 mm

Weight: 280g(640mm)



HBTR3

ISO 4210 - C approved

6061 P.G. trekking bar

Barbore: 25.4mm

Backsweep: 11degree

Width: 600/620/640/660/680 mm

Weight: 265g(640mm)



HBTR4

ISO 4210 - C approved

EN 15194 (E-CITY)

6061 P.G. trekking bar

Barbore: 31.8mm

Backsweep: 11degree

Width: 620/640/660/680/700/720mm

Weight: 275g(640mm)



HB411E

ISO 4210 - C approved

HB411OV

ISO 4210 - C approved / EN15194(E-CITY)

6061 P.G. trekking bar

Barbore: 25.4mm(HB411E)

31.8mm(HB411OV)

Rise: 28mm

Backsweep: 37degree

Width: 520/540/560/580/600/620/640mm(HB411E)

520/540/590/600/620/640/660/680mm(HB411OV)

Weight: 274g(HB411E 600mm)

290g(HB411OV 600mm)

AL030 (T2.2 / Centr:40mm)
ISO 4210 - C approved

AL030K (T3.0 / Centr:40mm)
ISO 4210 - C approved / EN15194(E-CITY)

AL030S (T2.0 / Centr:70mm)
ISO 4210 - C approved / EN15194(E-CITY)

6061 P.G. trekking bar
Barbore: 25.4mm(AL030/AL030K)
31.8mm(AL030S)

Backsweep: 34degree
Width: 560//570/580/600/610mm(AL030)
580/600/610/620/640/660/680mm(AL030K)
600/610/620/640mm(AL030S)

Weight: 280g(AL030 610mm)
388g(AL030K 640mm)
312g(AL030S 640mm)

AL042 (Centr:90mm)
ISO 4210 - C approved

AL042L (Centr:70mm)
ISO 4210 - C approved / EN15194(E-CITY)

6061 P.G. trekking bar
Barbore: 25.4mm(AL042)
31.8mm(AL042L)

Backsweep: 15degree
Width: 480/500/520/540/560/580/600mm(25.4mm)
600/620/640/660/680mm(31.8mm)

Weight: 240g(AL042 600mm)
282g(AL042L 640mm)

AL069 (Centr:40mm)
ISO 4210 - C approved

AL069V (Centr:40mm)
ISO 4210 - C approved / EN15194(E-CITY)

6061 P.G. trekking bar
Barbore: 25.4mm(AL069)
31.8mm(AL069V)

Width: 570/585mm(AL069)
530/570/585mm(AL069V)
Length: 110/142/148mm

Weight: 500g(AL069 585mm)
516g(AL069V 585mm)

AL078 (Centr:35mm)
ISO 4210 - C approved

AL078L (Centr:40mm)
ISO 4210 - C approved / EN15194(E-CITY)

6061 P.G. trekking bar
Barbore: 25.4mm(AL078)
31.8mm(AL078L)

Rise: 45mm
Backsweep: 24degree
Width: 490/520/570/580/600/618mm(25.4mm)
600/620/640mm(31.8mm)

Weight: 254g(AL078 600mm)
266g(AL078L 600mm)

AL080 (Centr:40mm)
ISO 4210 - C approved

AL080L (Centr:40mm)
ISO 4210 - C approved / EN15194(E-CITY)

AL080S (Centr:80mm)
ISO 4210 - C approved / EN15194(E-CITY)

6061 P.G. trekking bar
Barbore: 25.4mm(AL080)
31.8mm(AL080L/AL080S)

Rise: 55mm
Backsweep: 40degree
Width: 580/600/620mm(25.4mm)
580/600/620/640/660/680(31.8mm)

Weight: 294g(AL080 620mm)
306g(AL080L 620mm)
308g(AL080S 620mm)

AL081 (Centr:32mm)
ISO 4210 - C approved

6061 P.G. trekking bar
Barbore: 25.4mm
Rise: 50mm
Backsweep: 59degree
Width: 535/560/580/610mm
Weight: 312g(580mm)

AL092 (Centr:70mm)
ISO 4210 - C approved

6061 P.G. trekking bar
Barbore: 25.4mm
Rise: 70mm
Backsweep: 50degree
Width: 520/540/560/580/600/620mm
Weight: 302g(600mm)

**BAREND'S
CLAMPS**

**B
A
R
E
N
D
S**

BE304

3D forged, 6061-T6
ergo endcap provides comfortable grip
and precisely control
Barbore: 22.2mm
Length: 80mm
Diameter of tube: 22mm
Weight: 87g



BE301

3D forged one piece, 6061-T6
Barbore: 22.2mm
Diameter of tube: Oval
Length: 80/90/110mm
Weight: 142g(80mm)



BE215

Tig-welded, 6061-T6
Barbore: 22.2mm
Diameter of tube: 25.4mm
Length: 80mm
Weight: 103g



BE16

Tig-welded, 6061-T6
Barbore: 22.2mm
Diameter of tube: 22.2mm
Weight: 133g



BE302

3D forged two piece, 6061-T6
Barbore: 22.2mm
Length: 96/120mm
Weight: 189g(120mm)



BE307

3D forged one piece, 6061-T6
Barbore: 22.2mm
Diameter of tube: Oval
Length: 80/110mm
Weight: 131g(110mm)



BETG1

3D forged one piece, 6061-T6
Barbore: 22.2mm
Diameter of tube: 22.6mm
Length: 85/110mm
Weight: 122g(85mm)



BEFIS

3D forged one piece, 6061-T6
Barbore: 22.2mm
Diameter of tube: 22.6mm
Weight: 145g



BE08

Melt forged head, 6061-T6 tube
Barbore: 22.2mm
Diameter of tube: 22.2mm
Weight: 182g



XC80

Extruded clamp with quick-release
Diameter: 28.6/31.8/34.9mm
Height: 15mm
Weight: 42g(34.9mm)



XC79

Extruded clamp with quick-release
Diameter: 38.1mm
Height: 15mm
Weight: 49g



XC61

Extruded clamp with quick-release
Diameter: 28.6/31.8/34.9mm
Height: 15mm
Weight: 56g(34.9mm)



XC60

2D forged clamp with quick-release
Diameter: 28.6/31.8/34.9mm
Height: 15mm
Weight: 50g(34.9mm)



XC78

2D forged clamp with quick-release
Diameter: 31.8/34.9mm
Height: 15mm
Weight: 44g(34.9mm)



XC68

Extruded clamp with quick-release
Diameter: 28.6/31.8/34.9mm
Height: 15mm
Weight: 41g(34.9mm)



XTB-N

2D forged clamp with quick-release
Diameter: 28.6/31.8/34.9mm
Height: 15mm
Weight: 53g(34.9mm)



XTB-C

Extruded clamp with quick-release
Diameter: 28.6/31.8/34.9mm
Height: 15mm
Weight: 49g(34.9mm)



XC72

2D forged clamp with quick-release
Diameter: 31.8/34.9mm
Height: 22.5mm
Weight: 46g(34.9mm)



XC63

Extruded clamp with quick-release
Diameter: 28.6/31.8/34.9mm
Height: 15mm
Weight: 55g(34.9mm)
Finished: two tone color for black

QUICK RELEASE LEVER



SQ-M32

Extruded quick release lever
Diameter: 6/8mm
Length: 45/50/55/60/65/70mm
Weight: 34g(L:50mm)



SQ60

Forged quick release lever
Diameter: 5mm
Length: 50/55/60/65/70mm
Weight: 29g(L:50mm)

SC213

2D forged clamp
Diameter: 31.8/34.9mm
Height: 26mm
Weight: 25g(34.9mm)



SC208

Extruded clamp
Diameter: 31.8/34.9mm
Height: 15mm
Weight: 17g(34.9mm)



SC206

2D forged clamp
Special for carbon fiber shaft
Diameter: 31.8/34.9mm
Height: 11mm
Weight: 23g(34.9mm)
Finished: two tone color for black



SC205

Extruded clamp
Diameter: 28.6/31.8/34.9mm
Height: 11mm
Weight: 27g(34.9mm)



SC204

Extruded clamp
Diameter: 28.6/31.8/34.9mm
Height: 13mm
Weight: 30g(34.9mm)



SC201

Extruded clamp with CNC groove
Diameter: 28.6/31.8/34.9mm
Height: 13mm
Weight: 28g(34.9mm)



SC203

Extruded clamp with Allen seat pin
Diameter: 28.6/31.8/34.9mm
Height: 15mm
Weight: 36g(34.9mm)



SC200

Extruded clamp
Diameter: 28.6/31.8/34.9mm
Height: 15mm
Weight: 32g(34.9mm)



SC100

Extruded clamp
Diameter: 28.6/31.8/34.9mm
Height: 11mm
Weight: 23g(34.9mm)



SC78

2D forged clamp
Diameter: 31.8/34.9mm
Height: 15mm
Weight: 28g(34.9mm)



MTBFG

Extruded clamp
Diameter: 28.6/31.8/34.9mm
Height: 15mm
Weight: 30g(34.9mm)



MTB-TK

2D forged clamp
Diameter: 28.6/31.8/34.9mm
Height: 15mm
Weight: 34g(34.9mm)



MTB-FM

Extruded clamp & CNC
Diameter: 28.6/31.8/34.9mm
Height: 15mm
Weight: 30g(34.9mm)



GC01

CNC extruded double clamp
Diameter: 27.2x31.8mm
31.6x34.9mm
Height: 38mm
Weight: 46g(31.6mmx34.9mm)



GC02

CNC extruded double clamp
Diameter: 27.2x30.6/31.8mm
30.9/31.6x34.9mm
31.8x35.1mm
Height: 31mm
Weight: 40g(31.6mmx34.9mm)

UBSOP01

ISO 4210 - R/M approved
carbon fiber
Diameter: 27.2/31.6mm
Length: 300/350/400mm
Offset: 10mm
Weight: 192g(31.6mmx350mm)



UBSOP02

ISO 4210 - R/M approved
carbon fiber
Diameter: 27.2/31.6mm
Length: 300/350/400mm
Offset: 0mm
Weight: 182g(31.6mmx350mm)



UBSOP03

ISO 4210 - R/M approved
Alloy clamps with carbon shaft
Diameter: 27.2/31.6mm
Length: 300/350/400mm
Offset: 10mm
Weight: 208g(31.6mmx350mm)



NEW

UBSOP04

ISO 4210 - R/M approved
Alloy clamps with carbon shaft
Diameter: 27.2/31.6mm
Length: 300/350/400mm
Offset: 0mm
Weight: 192g(31.6mmx350mm)



UBSD01

ISO 4210 - R approved
carbon racing bar
Barbore: 31.8mm
Drop: 110mm
Reach: 72mm
Flare angle: 6degree
Ramp angle: 6degree
Width: 400/420/440mm
Weight: 246g(420mm)



UBSRO1

ISO 4210 - M approved
carbon rise bar
Barbore: 31.8mm
Rise: 15mm
Backsweep: 9degree
Width: 540/700/720/740/760/780/800mm
Weight: 196g(780mm)



UBSF01

ISO 4210 - M approved
carbon flat bar
Barbore: 31.8mm
Backsweep: 9degree
Width: 700/720/740/760/780/800mm
Weight: 196g(780mm)



UBSSP01

ISO 4210 - R/M approved
2D forged head, carbon fiber shaft
Diameter: 27.2/30.9/31.6mm
Length: 300/350/400mm
Offset: 10mm
Weight: 240g(31.6mmx350mm)



UBSSP02

ISO 4210 - R/M approved
2D forged head, carbon fiber shaft
Diameter: 27.2/30.9/31.6mm
Length: 300/350/400mm
Offset: 0mm
Weight: 232g(31.6mmx350mm)



ASHD001

ISO 4210 - M⁺ approved
3D forged, 6061-T6 aluminum
Ext.: 60/70/80/90/100/110/120mm
Angle: 7degree
Diameter: 31.8mm
Steerer: 28.6mm
Height: 40mm
Weight: 178g(80mm)



ASHD002

ISO 4210 - M⁺ approved
3D forged, 6061-T6 aluminum
Ext.: 35/45/55/65mm
Angle: 0degree
Diameter: 31.8mm
Steerer: 28.6mm
Height: 40mm
Weight: 174g(45mm)



HD series offer higher performance, enhance the capabilities and strength with stern test standard. This beating the satisfaction of E-bike and cargo bike.

- Higher performance
- Enhance capabilities
- ISO 4210 M⁺

SPHD001

ISO 4210 - M⁺ approved
3D forged one-piece, 6061-T6 shaft
Diameter: 27.2/30.9/31.6mm
Length: 300/350mm
Offset: 15mm
Weight: 383g(31.6mmx350mm)



SPHD002

ISO 4210 - M⁺ approved
3D forged one-piece, 6061-T6 shaft
Diameter: 27.2/30.9/31.6mm
Length: 300/350mm
Offset: 0mm
Weight: 383g(31.6mmx350mm))



+ HBHF101

ISO 4210 - M⁺ approved
6061 D.B. flat bar
Barbore: 31.8mm
Backsweep: 5/9degree
Width: 680/700/720/740/760mm
Weight: 340g(720mm)



+ HBHT101

ISO 4210 - M⁺ approved
6061 D.B. flat top
Barbore: 31.8mm
Backsweep: 5/9degree
Width: 680/700/720/740/760mm
Weight: 340g(740mm)



+ HBHR101

ISO 4210 - M⁺ approved
6061 D.B. rise bar
Barbore: 31.8mm
Rise: 25mm
Backsweep: 5/9degree
Upsweep: 5degree
Width: 660/680/700/720/740/760/780mm
Weight: 360g(760mm)



ROAD BAR

FLARE SERIES

Model No.	material	butting	barbore	width (center to center)	drop/reach	ramp angle	flare angle	weight(420mm)
HB-L001	6061	P.G.	31.8mm	400/420/440/460mm	125/70mm	10 degree	6/12degree	370g
HB-L002	6061	P.G.	31.8mm	400/420/440/460mm	125/78mm	20 degree	6/12degree	430g
HB-L101	6061	D.B.	31.8mm	400/420/440/460mm	125/70mm	10 degree	6/12degree	300g
HB-L102	6061	D.B.	31.8mm	360/380/400/ 420/440/460mm	125/70mm	10 degree	6/12degree	315g
HB-L103	6061	D.B.	31.8mm	400/420/440/460mm	125/78mm	20 degree	6/12degree	315g
HB-FL12	6061	D.B.	31.8mm	400/420/440/460mm	125/70mm	10 degree	20degree	285g
HB-UB22	6061	D.B.	31.8mm	560mm	100/66mm	40 degree	11degree	280g(560mm)

COURSE SERIES

Model No.	material	butting	barbore	width (center to center)	drop/reach	weight
HB-CR11	6061	P.G.	31.8mm	380/400/420/440mm	125/70mm	435g(420mm)
					140/90mm	435g(400mm)
HB-CR12	6061	D.B.	31.8mm	360/380/400/420 /440/460/480mm	125/70mm	300g(420mm)
					140/90mm	305g(400mm)
HB-CR13	7050	D.B.	31.8mm	380/400/420/440mm	125/70mm	285g(420mm)
					140/90mm	287g(420mm)

COURSE SL SERIES

Model No.	material	butting	barbore	width (center to center)	drop/reach	weight
HB-CR21	6061	P.G.	26.0mm	360/380/400/420/440mm	120/75mm	
			31.8mm	360/380/400 /420/440/460mm		355g(380mm)
HB-CR22	6061	D.B.	31.8mm	360/380/400 /420/440/460mm	120/70mm	285g(420mm)

TEAM ERGO SERIES

Model No.	material	butting	barbore	width (center to center)	drop/reach	weight(420mm)
HB-TE11	6061	P.G.	26.0mm	380/400/420/440/460mm	150/80mm	
			31.8mm	400/420/440mm	144/77mm	425g
HB-TE12	6061	D.B.	31.8mm	400/420/440mm	144/77mm	320g

TEAM SERIES

Model No.	material	butting	barbore	width (center to center)	drop/reach	weight(400mm)
HB-TM11	6061	P.G.	31.8mm	360/380/400/420/440mm	131/75mm	425g
HB-TM12	6061	P.G.	31.8mm	380/400/420 /440/460/480mm	131/84mm	420g
HB-TM13	6061	D.B.	31.8mm	400/420/440mm	131/84mm	320g

TEAM SL SERIES

Model No.	material	butting	barbore	width (center to center)	drop/reach	weight(420mm)
HB-TM21	6061	P.G.	31.8mm	380/400/420/440mm	125/72mm	405g
HB-TM22	6061	P.G.	31.8mm	400/420/440mm	142/82mm	400g
HB-TM23	6061	D.B.	31.8mm	400/420/440mm	142/82mm	300g

AERO SERIES








Model No.	material	butting	barbore	width (center to center)	drop/reach	weight
HB-AR15	6061	D.B.	31.8mm	400/420/440mm	125/70mm	285g(400mm)
HB-AR31	6061	D.B.	31.8mm	380/400/420/440mm	130/80mm	340g(420mm)
HB-AR32	6061	D.B.	31.8mm	380/400/420mm	125/78mm	352g(420mm)

CAMPUS SERIES


Model No.	material	butting	barbore	width (center to center)	drop/reach	weight
HB-CM11	6061	P.G.	26.0mm	400/420/440mm	150/130mm	440g(420mm)
HB-CM21	6061	P.G.	26.0mm	400/420/440mm	135/80mm	385g(420mm)
HB-CM31	6061	P.G.	26.0mm	360/380/400/420/440mm	170/90mm	407g(380mm)
			31.8mm	380/400/420/440mm		
			26.0mm	360/380/400/420/440mm	183/108mm	
			31.8mm	380/400/420/440mm		440g(420mm)

HANDLE BAR

Model No.	material	butting	barbore	width (center to center)	weight
HBD101	6061	D.B.	31.8mm	400/420/440/460mm	316g(420mm)

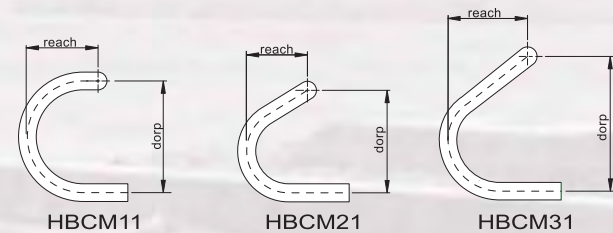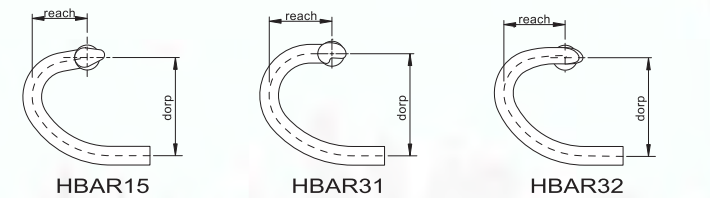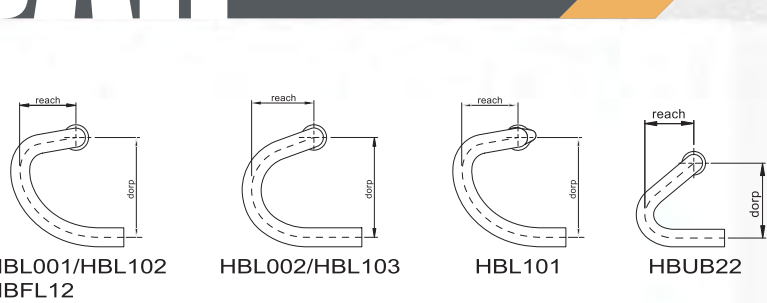

HANDLEBARS

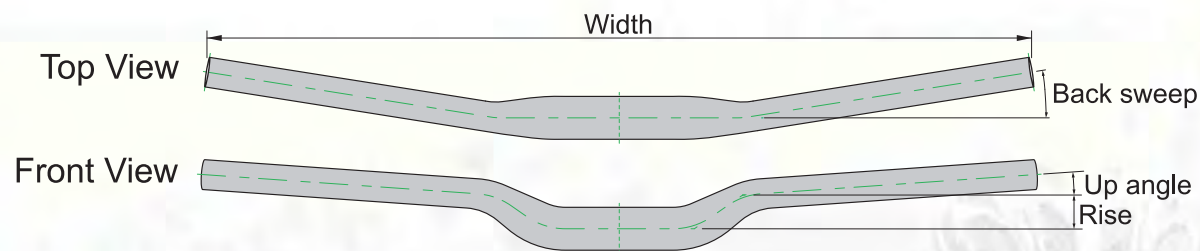

FLAT BAR

Model No.	barbore	width (center to center)	backsweep	material	butting	weight
HBFB11	25.4mm	500/520/540/560/580/600/620/640mm	5°/ 9°	6061	P.G.	243g(580mm)
	31.8mm	540/560/580/600mm	0°/5°/9°			265g(580mm)
HBFB11L	31.8mm	620/640/660/680/700/720mm	5°/ 9°	6061	P.G.	375g(720mm)
HBFB12	25.4mm	500/520/540/560/580/600/620mm	5°/ 9°	6061	D.B.	205g(580mm)
	31.8mm	540/560/580/600mm	5°/9°/12°			233g(580mm)
HBFB12L	31.8mm	620/640/660/680/700/720/740mm	5°/9°/12°	6061	D.B.	235g(620mm)
HB351	35.0mm	620/640/660/680/700/720/740/760mm	5°/ 9°	6061	D.B.	285g(720mm)

FLAT TOP

Model No.	barbore	width (center to center)	backsweep	material	butting	weight
HBFB21	31.8mm	540/560/580/600mm	5°/ 9°	6061	D.B.	240g(600mm)
HBFB21L	31.8mm	620/640/660/680/700/720mm	5°/ 9°	6061	D.B.	260g(680mm)
HBFB21W	31.8mm	730/740/760mm	5°/ 9°	6061	D.B.	312g(740mm)
HBFB22	31.8mm	560/580/600mm	5°/ 9°	7050	D.B.	226g(600mm)
HBFB22L	31.8mm	620/640/660/680/700/720mm	5°/ 9°	7050	D.B.	290g(700mm)
HB352	35.0mm	620/640/660/680/700/720/740/760/780mm	5°/ 9°	6061	D.B.	285g(720mm)

RISE BAR

Model No.	barbore	rise	width (center to center)	backsweep	material	butting	weight
HBRB11	25.4mm	20/30mm	500/520/540/560/580/600/620/640/660/680mm	6°/9°/12°	6061	P.G.	375g(660mm)
	31.8mm	10/15mm	560/580/600/620/640/660/680mm	5°/9°/12°			400g(660mm)
		25/35mm	560/580/600/620/640/660/680mm	5°/ 9°			
HBRB11L	31.8mm	10/35mm	700/720mm	5°/ 9°	6061	P.G.	390g(720mm)
		15/25mm	700/720/740mm				
		35mm	700/720/740/760mm				
HBRB12	25.4mm	25mm	500/520/540/560/600/620/640/660/680mm	8°	6061	D.B.	252g(660mm)
	31.8mm	15mm	500/520/540/560/580/600/620/640/660/670/680mm	5°/9°/15°/25°			272g(660mm)
		25mm		5°/9°/15°			
HBRB12L	31.8mm	15/25mm	700/720/740mm	5°/ 9°/15°	6061	D.B.	295g(720mm)
HBRB12W	31.8mm	15/25/35mm	700/720/740/760/780/800mm	5°/ 9°	6061	T.B.	330g(780mm)
HBRB22	31.8mm	10mm		5°/ 9°/12°	6061	D.B.	295g(720mm)
HBR100	31.8mm	15mm	580/600/620/640/660/680mm	5°/ 9°	6061	D.B.	278g(640mm)
HBR100L	31.8mm	15mm	700/720mm	5°/ 9°	6061	T.B.	300g(720mm)
GB03	31.8mm	25/40mm	680/700/720/740/760/780mm	9°	7050	T.B.	345g(700mm)
HB353	35.0mm	15/25/35mm	580/680/700/720/740/760/780/800mm	5°/ 9°	6061	D.B.	315g(780mm)
		45mm	580/680/700/720/740/760mm				
QTSRB02	31.8mm	18mm	600/620/640/660/680/700/720/740/760/780mm	8°	Carbon		182g(780mm)

HANDLE BAR

Model No.	barbore	rise	width (center to center)	backsweep	material	butting	weight
HBUB12	31.8mm	17mm	660/680mm	15°/ 30°	6061	D.B.	295g(660mm)

TREKKING BAR

Model No.	barbore	rise	width (center to center)	backsweep	material	butting	weight
AL030	25.4mm		560/570/580/600/610mm	34°	6061	P.G.	280g(610mm)
AL030K	25.4mm		580/600/610/620/640/660/680mm	34°	6061	P.G.	386g(640mm)
AL030S	31.8mm		600/610/620/640mm	34°	6061	P.G.	304g(640mm)
AL042	25.4mm		480/500/520/540/560/580/600mm	15°	6061	P.G.	240g(600mm)
AL042L	31.8mm		600/620/640/660/680mm	15°	6061	P.G.	260g(600mm)
AL069	25.4mm		570/585mm		6061	P.G.	500g(585mm)
AL069V	31.8mm		530/570/585mm		6061	P.G.	524g(585mm)
AL078	25.4mm	45mm	490/520/570/580/600/618mm	24°	6061	P.G.	250g(580mm)
AL078L	31.8mm	45mm	600/620/640mm	24°	6061	P.G.	275g(620mm)
AL080	25.4mm	55mm	580/600/620mm	40°	6061	P.G.	280g(600mm)
AL080L	31.8mm	55mm	580/600/620/640/660/680mm	40°	6061	P.G.	304g(600mm)
AL080S	31.8mm	55mm	580/600/620/640/660/680mm	40°	6061	P.G.	330g(640mm)
AL081	25.4mm	50mm	535/560/580/610mm	59°	6061	P.G.	312g(580mm)
AL092	25.4mm	70mm	520/540/560/580/600/620mm	50°	6061	P.G.	300g(580mm)
HB411E	25.4mm	28mm	520/540/560/580/600/620/640mm	37°	6061	P.G.	274g(600mm)
HB411OV	31.8mm	28mm	520/540/560/600/620/640/660/680mm	37°	6061	P.G.	290g(600mm)
HBTR1	25.4mm		580/600/620/640/660/680mm	25°	6061	P.G.	290g(640mm)
HBTR2	31.8mm		600/620/640/660/680mm	25°/ 35°/45°	6061	P.G.	280g(640mm)
HBTR3	25.4mm		600/620/640/660/680mm	11°	6061	P.G.	265g(640mm)
HBTR4	31.8mm		620/640/660/680/700/720mm	11°	6061	P.G.	275g(640mm)

HD SERIES

Model No.	barbore	rise	width (center to center)	backsweep	material	butting	weight
HBHF101	31.8mm		680/700/720/740/760mm	5°/ 9°	6061	D.B.	340g(720mm)
HBHT101	31.8mm		680/700/720/740/760mm	5°/ 9°	6061	D.B.	340g(720mm)
HBHR101	31.8mm	25mm	660/680/700/720/740/760/780mm	5°/ 9°	6061	D.B.	360g(760mm)

UBS SERIES

Model No.	barbore	rise	width (center to center)	backsweep	material	butting	weight
UBSF01	31.8mm		700/720/740/760/780/800mm	9°	Carbon		196g(780mm)
UBSR01	31.8mm	15mm	540/700/720/740/760/780/800mm	9°	Carbon		196g(780mm)



UNO

www.kalloyuno.com

2024

CONFIGURE
WITH

