




Vol. 9

 **BRIDGESTONE**

**High -
&
High -**

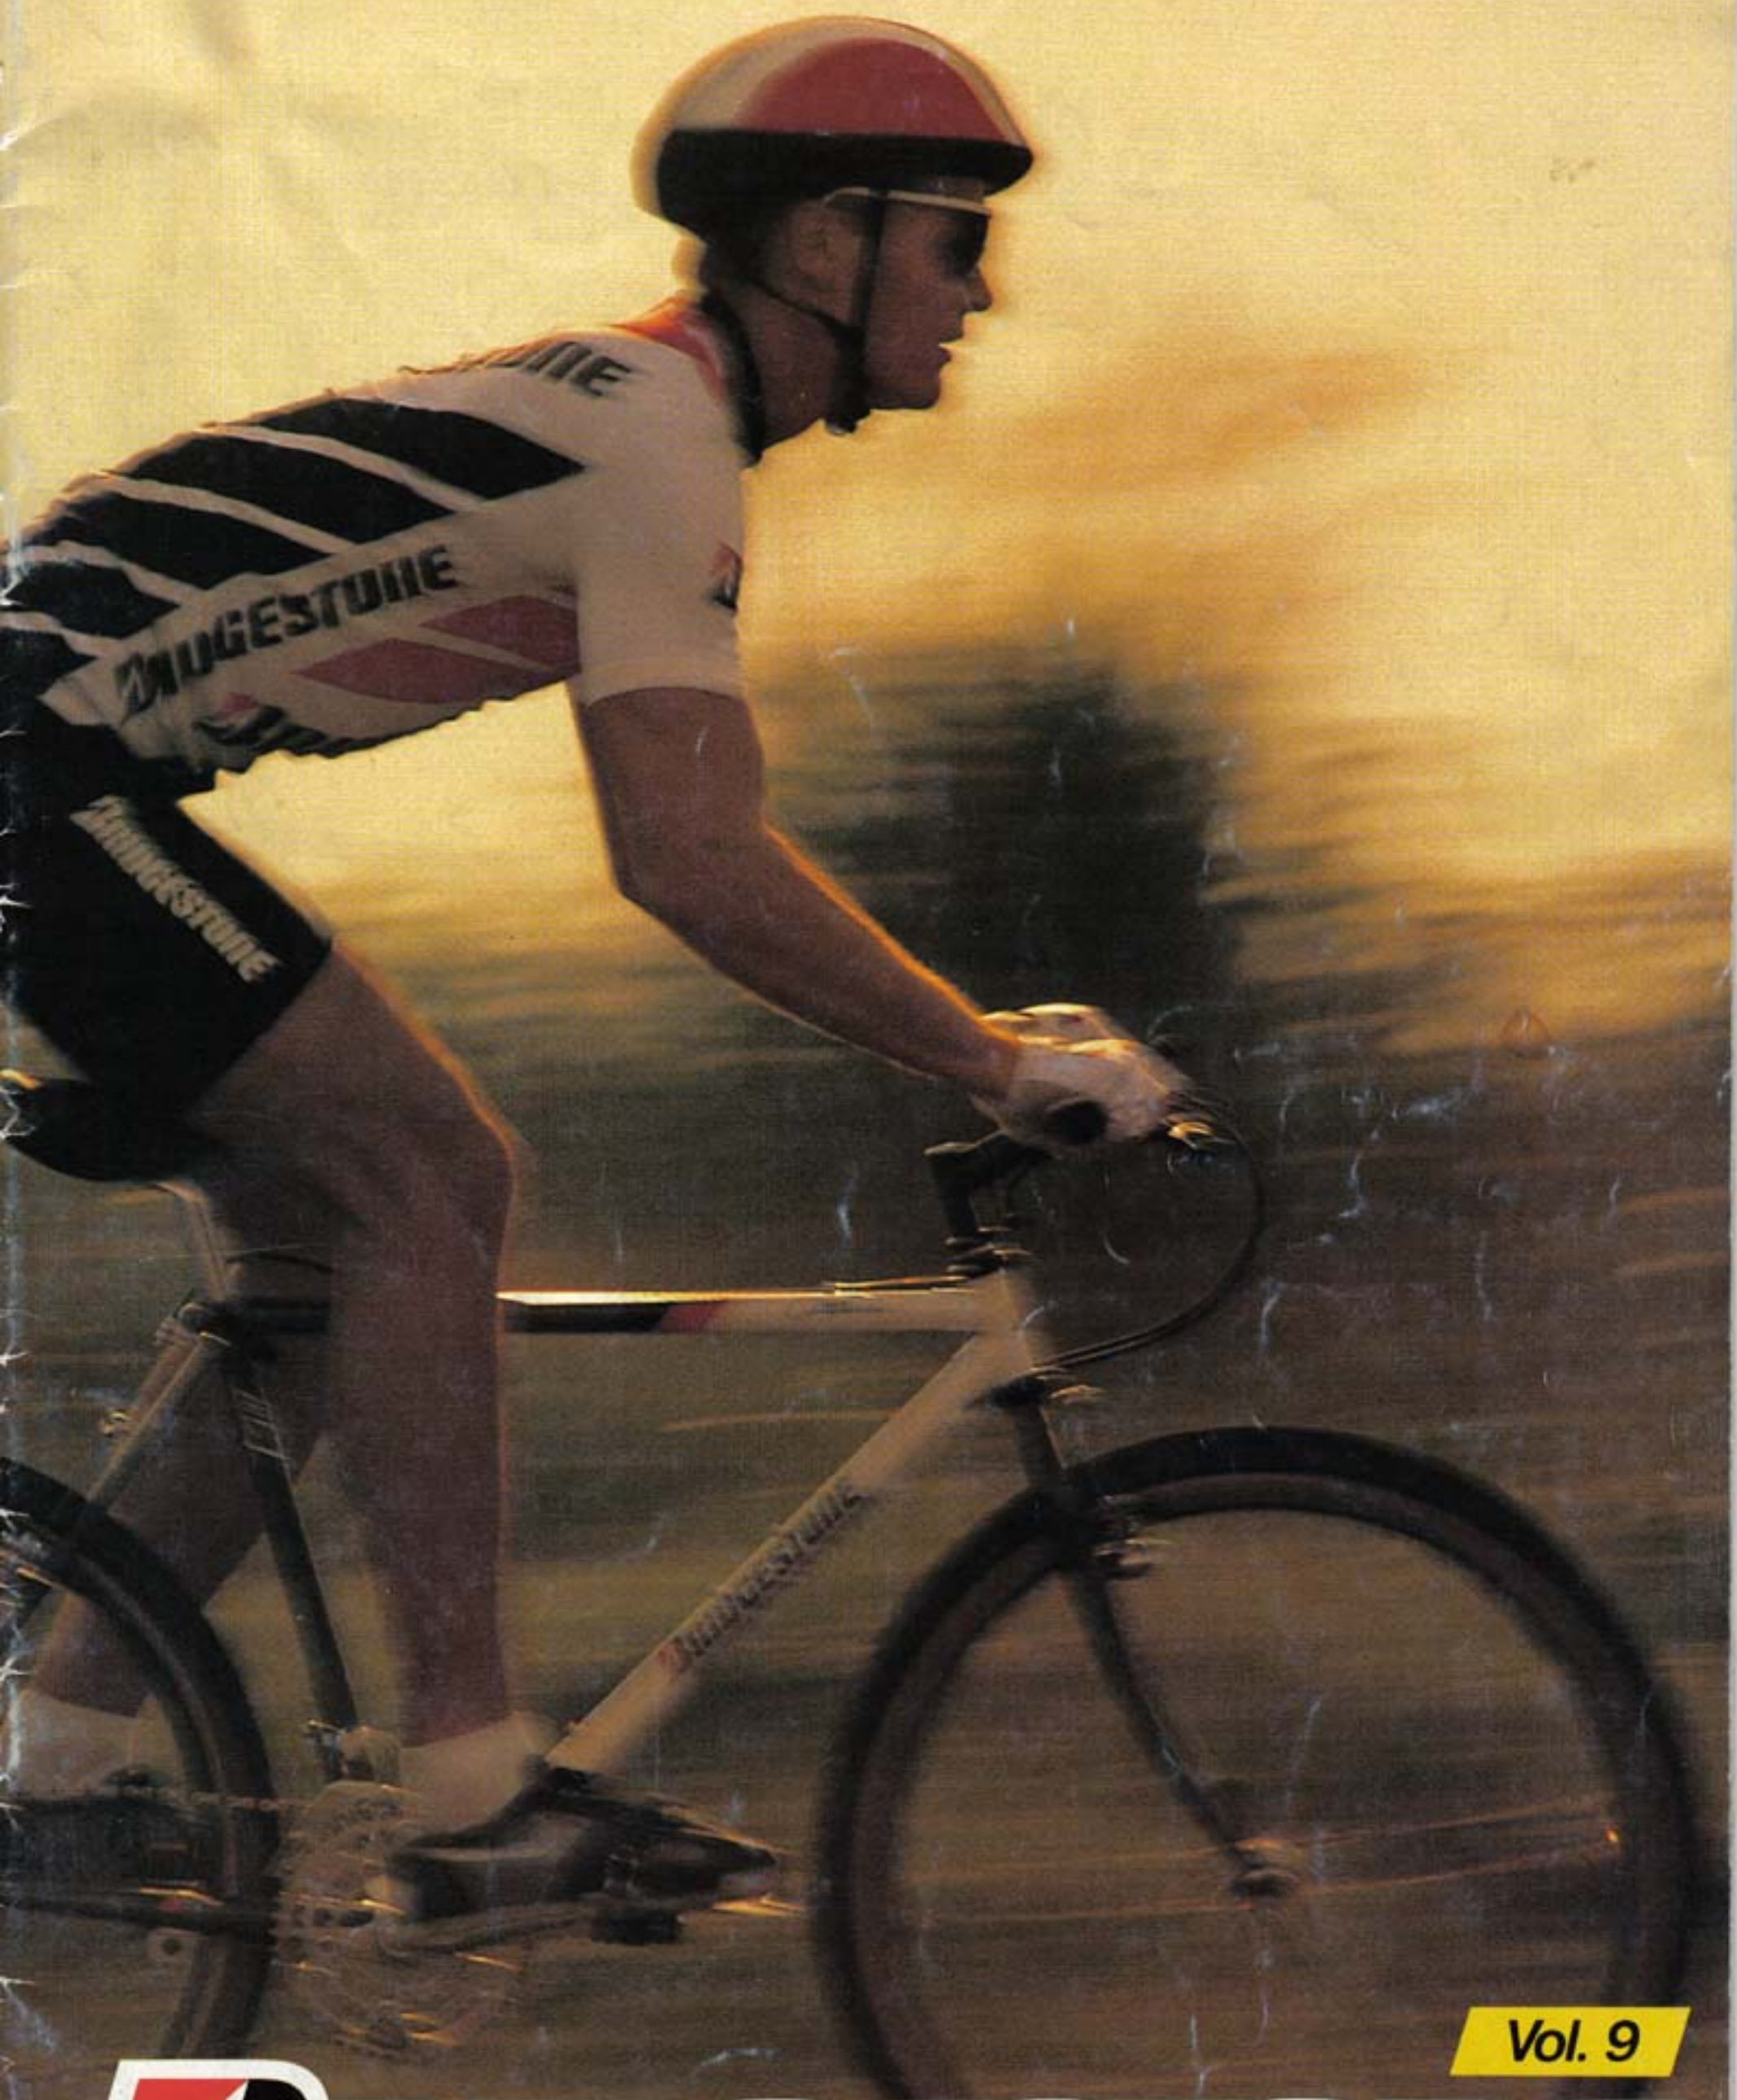

Technology

Styling

Boundless dreams and fantasy will be achieved by technological innovation. BRIDGESTONE has achieved a great deal of technological advancement. Recent results are the belt driven system, which brings you a smoother ride; the constructive adhesive method, resulting in a lighter frame; the ceramic coated rim, which brings to you reliable braking even in the rain; a one-touch, easy-to-collapse frame, and so on. Styling is another very important aspect in our

product planning. Based on human engineering, a lot of work has been done in this field too. How can the frame be more comfortable for a human being? How can it fit in with individual taste and life styles? What about color? and other considerations.

Our goal is to serve cyclists through our technological innovations, quality, and design. All of these are meant to bring you greater satisfaction with BRIDGESTONE.




COMP MB-1

This is our superlight superbike. Compare the ride, specs, detail, and price to any bike on the market. Then compare weights. Then whip out your wallet. If you can't go fast on the MB-1, you've got the wrong legs.



Technical Data

TANGE PRESTIGE throughout and KOSKI DURA-TRAC™ constant taper forks—RITCHEY DURO-KEVLAR tire, RITCHEY VANTAGE super-hard 32H rim, WHEELSMITH butted spokes, presta valve—TANGE PRESTIGE handle bar and RITCHEY FORCE 10° rise CrMo stem—SHIMANO DEORE-XT II group; derailleur, 2-finger brakes and 7-speed cassette—AVOCET leather racing saddle, NITTO seat post—46, 49, 52, 55cm—White/Gray

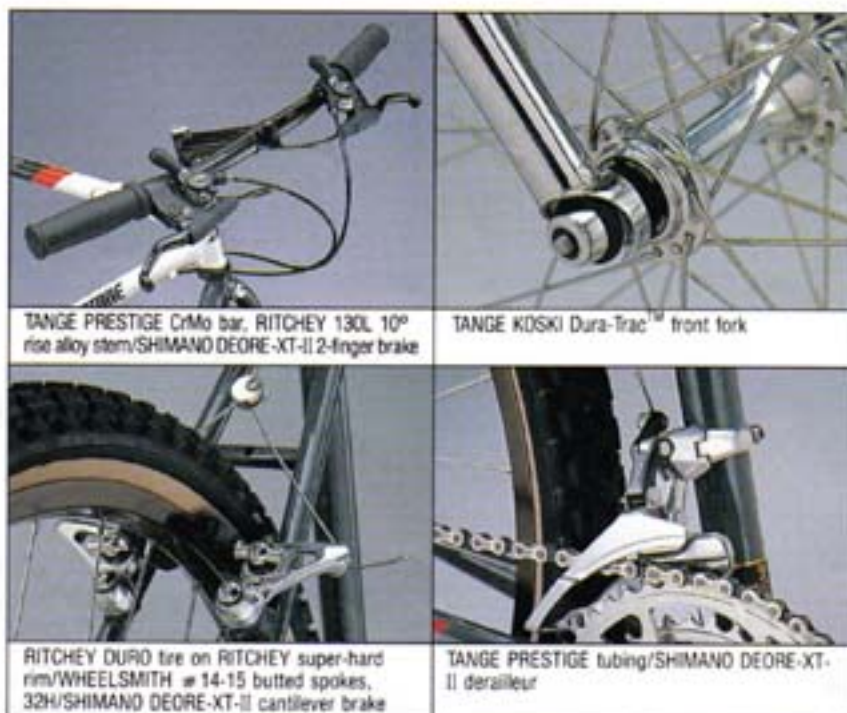

TANGE PRESTIGE CrMo bar, RITCHEY 130L 10° rise alloy stem/SHIMANO DEORE-XT-II 2-finger brake

TANGE KOSKI Dura-Trac™ front fork

RITCHEY DURO tire on RITCHEY super-hard rim/WHEELSMITH #14-15 butted spokes, 32H/SHIMANO DEORE-XT-II cantilever brake

TANGE PRESTIGE tubing/SHIMANO DEORE-XT-II derailleur



Classic White/Solid Gray


COMP MB-2

For the second year in a row, the MB-2 is our personal favorite bike. It has the same ride as the MB-1, and blows away all other bikes in it's price category. Koski Dura-Trac™ forks, Wheelsmith spokes, Ritchey rims, Fisher toe clips, ROUND chainrings, and a superlight SR pedal that most other manufacturers haven't even heard of. Nothing tossaway. Every detail dialed.



Technical Data

ISHIWATA butted CrMo tubing throughout, KOSKI DURA-TRAC™ constant taper forks — SUNTOUR XC-9000 drivetrain; with XC-9010 derailleur and 7-speed cassette — DIA-COMPE 984 low profile ratchet canti brake and ADVANTAGE-5 compact lever — Grease-injectable bottom bracket — RITCHEY FORCE tire, RITCHEY VANTAGE super-hard 32H rim, WHEELSMITH spokes, presta valve — RITCHEY FORCE handle bar and RITCHEY FORCE 10° rise CrMo stem — SR CTP-400 racing pedal — AVOCET racing saddle, SR 300mm seat post — 46, 49, 52, 55cm — Scarlet/White

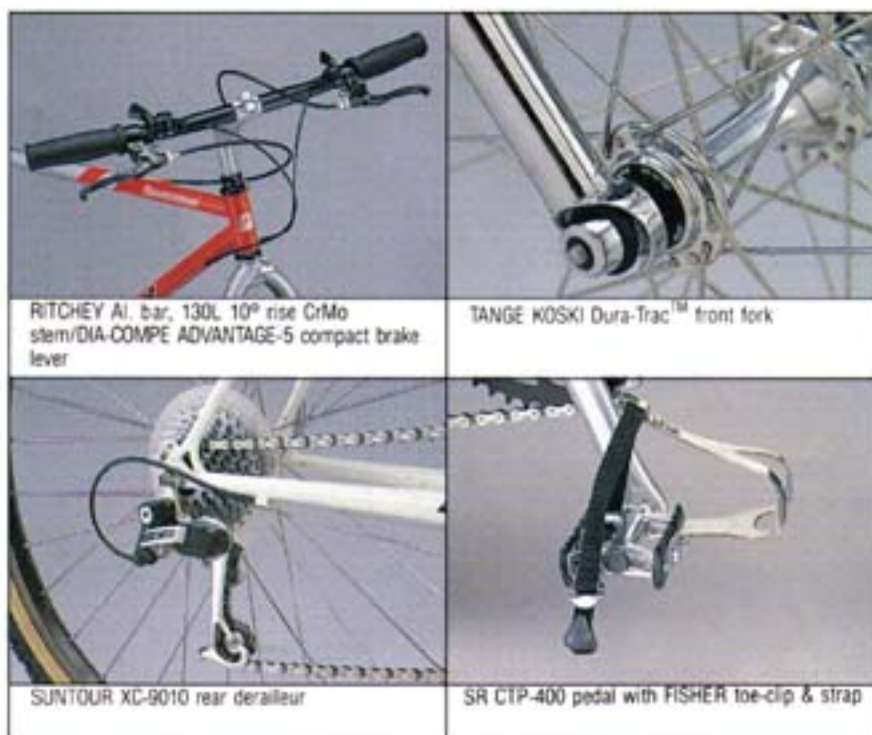

RITCHEY Al. bar, 130L 10° rise CrMo stem/DIA-COMPE ADVANTAGE-5 compact brake lever

TANGE KOSKI Dura-Trac™ front fork

SUNTOUR XC-9010 rear derailleur

SR CTP-400 pedal with FISHER toe-clip & strap



Scarlet/Classic White


COMP MB-3

Our GIANT killer: Priced like a T-bike, but built in our own factory in Japan. Last year the MB-3 was our most popular model—demand tripled supply. It's even better this year... and so is our stock. If you find a better bike at the same price—or even a little more—write and tell us.



Technical Data

ISHIWATA butted CrMo tubing throughout, KOSKI-style forks—SHIMANO DEORE II group: with 2-finger brake and 7-speed cassette—RITCHEY FORCE tire, RITCHEY VANTAGE 32H, rim, WHEELSMITH spokes, presta valve—RITCHEY FORCE handle bar and RITCHEY FORCE 10° rise CrMo stem—SR CTP-400 low-fat pedal—AVOCET racing saddle, SR 300mm seat post—42, 46, 49, 52, 55cm—Black/Gray or Scarlet

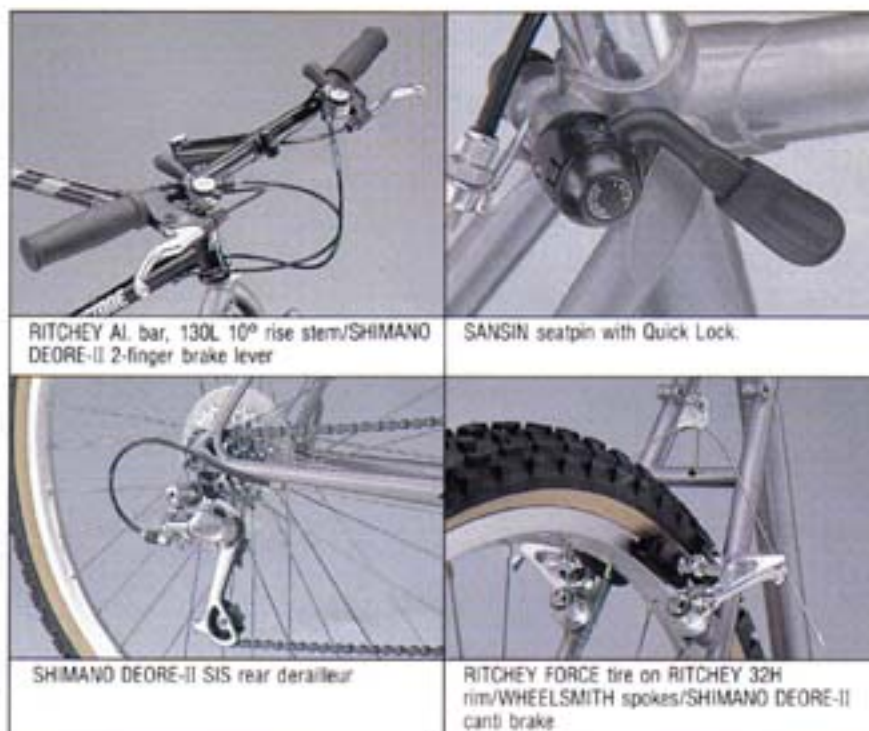

RITCHEY Al. bar, 130L 10° rise stem/SHIMANO DEORE-II 2-finger brake lever

SANSIN seatpin with Quick Lock.

SHIMANO DEORE-II SIS rear derailleur

RITCHEY FORCE tire on RITCHEY 32H rim/WHEELSMITH spokes/SHIMANO DEORE-II canti brake



Solid Black/Dark Gray



Scarlet


TRAILBLAZER MB-4

The MB-4 has the same short chainstays, graduated seat tubes, and long top tubes of our MB-1-2-3. So you'll get the same efficient position, the same Bridgestone ride. The stock 1.60" RITCHEY tires are great for fire roads and tours de tarmac, and it's ready for boulder bumping and hack riding.



Technical Data

TANGE butted CrMo throughout — SHIMANO new Mountain-LX group; with 7-speed cassette and alloy canti front and rear — RITCHEY FORCE alloy bar and 18° rise CrMo stem — RITCHEY 26 x 1.6" tire, ARAYA new RX-7 rim, presta valve — AVOCET TOURING saddle, 300mm long seat post — 42, 46, 49, 52, 55cm — Gray/Gray or Blue/Green (fade)

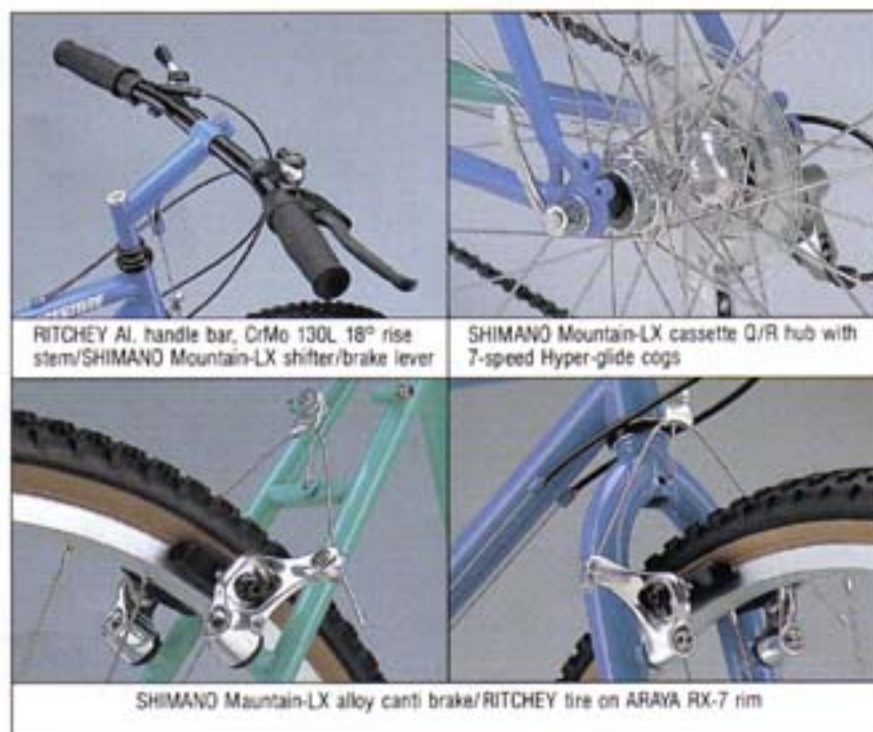

RITCHEY Al. handle bar, CrMo 130L 18° rise stem/SHIMANO Mountain-LX shifter/brake lever

SHIMANO Mountain-LX cassette Q/R hub with 7-speed Hyper-glide cogs

SHIMANO Mountain-LX alloy canti brake/RITCHEY tire on ARAYA RX-7 rim



Solid Gray/Neutral Gray



Open Blue/Turquoise Green (fade)

TRAILBLAZER MB-5

If you're tired of mock-mountain bikes, with their begging-dog riding positions and their "I ain't goin' nowhere!" attitudes, get the MB-5. This bike rides 85% as well as our MB-1, yet costs less than half as much.



TANGE CrMo throughout — SUNTOUR XCE-4050 drivetrain; 7-speed — RITCHEY FORCE handle bar and 18° rise CrMo stem — RITCHEY 26 x 1.6 tire, ARAYA 7XN rim, presta valve — AVOCET TOURING saddle, 300mm long seat post — 42, 46, 49, 52, 55cm — Blue/Silver or Red




TRAILBLAZER MB-6

Most entry-level mountain bikes take advantage of the beginning rider's naivete. The MB-6 doesn't insult you. No wide, raised, chrome handlebars; no bolt-on wheels; no hideous-looking saddle. This is a real mountain bike. If you buy another mountain bike after owning an MB-6, it'll be because your ego demands it and your wallet can afford it. Make your first mountain bike a real one. Get an MB-6.



Technical Data

TANGE CrMo throughout — RITCHEY 26 x 1.6 tire, ARAYA 7XN rim, presta valve — T-bone style CrMo handle stem and flat bar — SUNTOUR XCM-3040 ACCUSHIFT derailleur — alloy sealed hub, Q/R front and rear — AVOCET TOURING saddle, 300mm long seat post — 42, 46, 49, 52, 55, 58cm — Red/Silver or Silver/Blue (fade)

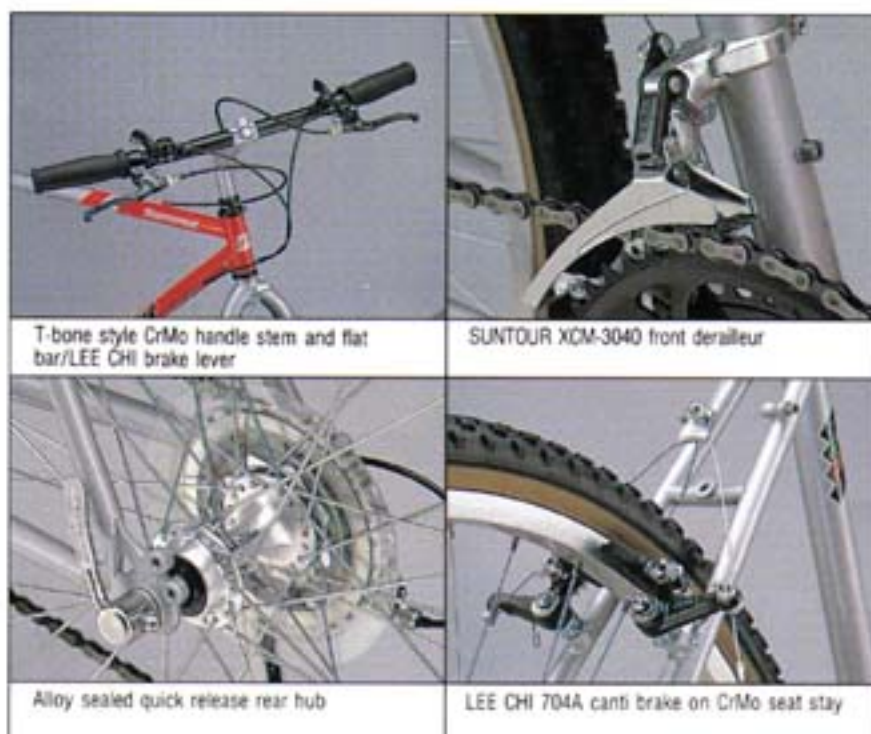

T-bone style CrMo handle stem and flat bar/LEE CHI brake lever

SUNTOUR XCM-3040 front derailleur

Alloy sealed quick release rear hub

LEE CHI 704A canti brake on CrMo seat stay



Seminole Red/Metallic Silver



Metallic Silver/Copen Blue (fade)

CITYLIMIT CB-2

We could have called this our City Conquistador, Urban Speed Rocket, Main Street Espresso, or any other of the silly names you often see on bikes of this type. But the CB-2 is too practical, rugged, and reliable to be dignified by such hype. Do you need great transportation around Mayberry, Crabwell Corners, or the town in which you live? Get our top street bike—the CB-2.



Technical Data

ISHIWATA CrMo oversize tubing, forged vertical dropout—SHIMANO EXAGE M250 group; SIS derailleur, biopace and SLR canti brake
 —26 x 1.6 skinwall tire, ARAYA alloy rim
 —black low rise handle bar and painted stem—Q/R front hub—16.5, 18, 20, 22" and Ladies' 17, 19"—Black or Green



SHIMANO EXAGE-Country shifter/brake lever



EXAGE-Country SLR cantilever brake



SHIMANO EXAGE-Country SIS derailleur



Solid Black



Turquoise Green

CITYLIMIT CB-3

We had no business making the CB-3 as advanced as it is. But we knew the competition would do it, so we made ours better. The Araya alloy rims, oversized frame tubes, and forged vertical dropouts fend off crummy streets, and the 15 speeds let you climb up asphalt walls, and fly down them.



Technical Data

Oversize Tig-welded frame and fork, forged vertical dropout — SHIMANO SIS derailleur — SR triple chainwheel — alloy canti brake and mountain lever — ARAYA alloy rim — Q/R front hub — satin finish medium rise bar — 18, 20, 22" and 17" Ladies' — Blue or Red



SHIMANO SIS derailleur



Cantilever brake on Tig welded Uni-crown



Quick-release front hub



Open Blue



Seminole Red

CITYLIMIT CB-4

The CB-4 is our basic cruiser-beachmobile-clunker. Perfect for flat-to-rolling asphalt. Zoom down Fast Food Lane, turn right on Convenience Store Boulevard, and don't even stop to play the video games. The CB-4 is the right tool for the job.



Technical Data

Oversize Tig-welded frame and Uni-crown fork — alloy sidepull brake, mountain lever — medium rise bar and double-taper shape grip — wide cushy saddle — teflon-lined cable housing — stain-resistant spokes — 18, 20, 22" and 17" Ladies', 17" Boys' (24" wheel) available — Black or Blue



SHIMANO MT32 shifter, Biconical grip



Tig welded Uni-crown



Rear rack mount



Solid Black



Royal Blue

RADAC 3100

This is our race bike. The superlight RADAC aluminum frame weights less than some carbon-fiber frames, yet has the same ideal flex characteristics as the finest chrome-moly. You want more stiffness? We gotta ask "Why?". This aluminum frame rides like a steel bike—but it's more comfortable, and weighs a lot less.



Technical Data

glued 5056 Aluminum frame and fork, internal top tube cable guides — SHIMANO DURA-ACE road group; with clipless pedals and 7-speed cassette — superlight 700 x 25C tire, 32H MAVIC rim, WHEELSMITH butted spokes — NITTO bar and stem — SAN MARCO ROLLS saddle, NITTO seat post — 49, 51, 53, 55, 57, 59, 61cm — Silver Anodized



RADAC 2100

This bike has the same RADAC aluminum frame as our RD-3100 model, but comes with Shimano Ultegra components—the best value in their line. How good is the RADAC frame? In hundreds of thousands of real road miles, we've yet to see a frame joint failure.



Technical Data

glued 5056 Aluminum frame and fork,
internal top tube cable guides — SHIMANO
ULTEGRA road group; with 7-speed cassette
— WOLBER GTX 32H rim, BRIDGESTONE
700 x 25C tire, WHEELSMITH spokes —
NITTO bar and stem — leather AVOCET
saddle — 49, 51, 53, 55, 57, 59, 61cm
— Silver Anodized



SHIMANO 600 ULTEGRA SIS derailleur/biopace—high performance ring/pedals

SHIMANO 600 ULTEGRA freehub with quick release

SHIMANO 600 ULTEGRA SLR brake/BRIDGESTONE 25C tire on WOLBER rim/WHEELSMITH spokes/NITTO European size bar



Silver Anodized

SYNERGY RB-1

Some people still like chrome-moly—and some of those people are us. The RB-1 is one bike you can buy now and still be riding hard in 10 years. SunTour's new GPX group works as well as any competition group on the market. WheelSmith spokes are almost unheard of on a bike of this price. If you want a light, responsive race bike that you don't have to baby, this is it. Compare the ride to any aluminum bike in it's class. In fact, compare the ride to any aluminum bike, period.



ISHIWATA butted CrMo throughout —
SUNTOUR GPX racing group; 7-speed cluster
— WOLBER GTX 32H rim, BRIDGESTONE
700 x 25C tire, WHEELSMITH spokes — SR
track-style alloy racing pedal — AVOCET
racing saddle — 48, 51, 53, 56, 59, 63cm
— Black/White or Scarlet



SYNERGY RB-2

The RB-2 has the same frame and the same ride as our favorite RB-1. It's a great bike for athletic riding on anything from smooth new pavement to grainy old fire roads. We almost came out with an aluminum bike in this price range. Then we took the RB-2 for one last ride, and came to our senses.



Technical Data

ISHIWATA butted CrMo throughout — SHIMANO SPORT-LX racing group; with 7-speed cassette — WOLBER GTX rim, BRIDGESTONE 700 x 25C tire — SR track-style alloy racing pedal — AVOCET racing saddle — 48, 51, 53, 56, 59, 63cm — Scarlet/White or Blue



SHIMANO EXAGE Sport SLR brake/BRIDGESTONE 700 x 25C tire on WOLBER GPX rim

HATTA VESTA SEALED-03 head set

SHIMANO EXAGE Sport-LX SIS derailleur/biopace alloy ring



Scarlet/Classic White



Turquoise Green

SYNERGY RB-3

The RB-3 is the least expensive road bike we know of with the road manners of a real race bike. We'd be surprised if the RB-3 won more than a couple dozen races this year, but we've no doubt that it's capable. If you're looking for a first fast bike, this is it.



ISHIWATA CrMo frame — SHIMANO EXAGE A350 drivetrain — SHIMANO EXAGE-Action SLR brake, aero lever — 700 x 25C skinwall tire, presta valve, WEINMANN alloy rim — alloy sealed hub, Q/R front and rear — AVOCET racing saddle — 49, 53, 57, 63cm — Black/Gray or Blue



SHIMANO EXAGE-Action SIS derailleur, shifter



SHIMANO EXAGE-Action SLR brake/aero lever



Solid Black/Pearl Gray



Royal Blue

SYNERGY SPORT RB-4

Free yourself from the bonds of public transportation! The RB-4 cruises Metropolis with more speed and dignity than riding on a busfull of rowdies, and provides a healthier form of exercise. For casual country rides of up to, say 25 miles, it's faultless. A good value, and practical choice.



Technical Data


Hi-Tensile frame and fork — SHIMANO
EXAGE A250 drivetrain — SHIMANO A250
SLR brakes and A251 aero levers — 27 x
1-1/8 skinwall tire, WEINMANN alloy rim —
Q/R front hub — AVOCET touring saddle
— 19, 21, 23, 25" and 19.5" Ladies' —
Men's: Blue/Silver or Scarlet, Ladies': Blue or
Scarlet



SHIMANO SIS handle shifter



SHIMANO A250 SLR brake

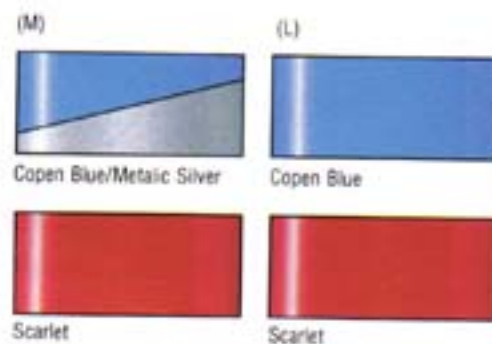

SYNERGY SPORT RB-5

The RB-5 is a perfect first 10-speed. For weekend and family rides around the neighborhood, it's just the ticket. Why buy a Department Store Special, when you can get a real bike from BRIDGESTONE?



Hi-Tensile frame and fork — SHIMANO Index rear derailleur — SR alloy forged crankset — alloy sidepull brakes and levers — 19, 21, 23, 25" and 19.5" Ladies' — Men's; Red/Silver or Black Ladies'; Red or Black



SHIMANO SIS stem shifter



SHIMANO SIS rear derailleur

(M)



Seminole Red/Metallic Silver

(L)



Seminole Red



Solid Black



Solid Black

BLOUSON BN-260

Don't be fooled by its dramatic appearance—the Blouson rides like a traditional bike, and has some unusually practical features: Drum brakes front and rear for sure stopping in any weather; fenders, for keeping the stripe off your back; a kickstand; and a rattle-free chainguard. Designed by Giugiaro.



40T alloy Crankset, Non-slip pedal, 16T
Wheel/26 x 1-3/8 — (F) Drum (R)
BRIDGESTONE DINEX Brake — Mud guard
(painted), Kickstand, Chain guard —
17.5" — Cosmic Silver — 37.0 lbs




Cosmic Silver

OPC-14B

This, the world's first belt-driven bicycle, can be collapsed and erected 12 times a minute by an average adult. It's driven by a Aramid reinforced belt which is silent, needs no lubrication, doesn't attract dirt and is as durable as a chain. A fun bike; easy to ride, easy to carry, easy to store.



Original collapsing mechanism — Alloy crank/65T for Belt-drive 85T (outer) x 71T (inner), Alloy pedal, 20T, Super torque type belt — Wheel/14 x 1.75 — (F) sidepull, (R) wirepull band brake — Anatomically-styled, High rise handle bar — Basket (clip-on type), Side stand, Belt guard — 17" — Carbon Black — 29 lbs

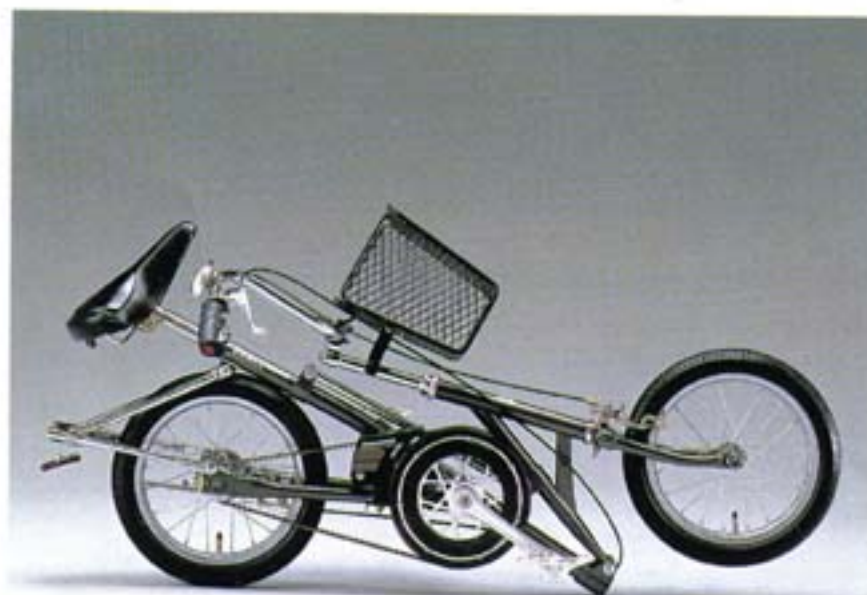

Carbon Black

Frame Geometry/ Gear Table


● CONVERSION TABLE (From MM to Inch)

mm	0	10	20	30	40	50	60	70	80	90
	inch									
0	0.0	0.4	0.8	1.2	1.6	2.0	2.4	2.8	3.1	3.5
100	3.9	4.3	4.7	5.1	5.5	5.9	6.3	6.7	7.1	7.5
200	7.9	8.3	8.7	9.1	9.4	9.8	10.2	10.6	11.0	11.4
300	11.8	12.2	12.6	13.0	13.4	13.8	14.2	14.6	15.0	15.4
400	15.7	16.1	16.5	16.9	17.3	17.7	18.1	18.5	18.9	19.3
500	19.7	20.1	20.5	20.9	21.3	21.7	22.0	22.4	22.8	23.2
600	23.6	24.0	24.4	24.8	25.2	25.6	26.0	26.4	26.8	27.2
700	27.6	28.0	28.3	28.7	29.1	29.5	29.9	30.3	30.7	31.1
800	31.5	31.9	32.3	32.7	33.1	33.5	33.9	34.3	34.6	35.0
900	35.4	35.8	36.2	36.6	37.0	37.4	37.8	38.2	38.6	39.0

COMP MB-1

FRAME SIZE	Seattube I	Seattube II	A	B	C	D	E	F	a	b	W	X	Y	Z
26" =														
42cm	420mm	442mm	565	425	623	1040	40	40	72°	73°30'	62	28.8"	295.0	466
46cm	460mm	472mm	575	425	626	1043	40	40	72°	73°30'	62	30.0"	295.0	448
52cm	520mm	502mm	585	425	630	1048	40	40	72°	73°	62	31.1"	295.0	439
56cm	560mm	532mm	595	425	642	1057	40	40	72°	73°	62	32.2"	295.0	440


Wheel Diameter = 670mm Seatube Diameter = 28.6mm

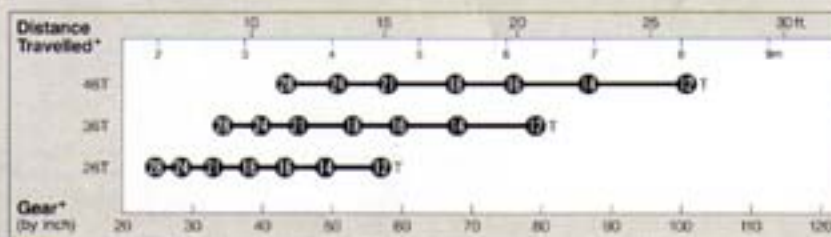

TRAILBLAZER MB-5

FRAME SIZE	Seattube I	Seattube II	A	B	C	D	E	F	a	b	W	X	Y	Z
26" =														
42cm	420mm	391mm	550	425	625	1041	40	40	71°30'	73°30'	62	27.0"	287.0	510
46cm	460mm	431mm	565	425	630	1047	40	40	72°	73°30'	59	28.5"	287.0	492
49cm	490mm	463mm	575	425	633	1050	40	40	72°	73°30'	59	29.7"	287.0	470
52cm	520mm	497mm	585	425	634	1050	40	40	72°	73°	59	30.8"	287.0	449
56cm	560mm	529mm	595	425	641	1058	40	40	72°	73°	59	31.9"	287.0	442


Wheel Diameter = 654mm Seatube Diameter = 28.6mm

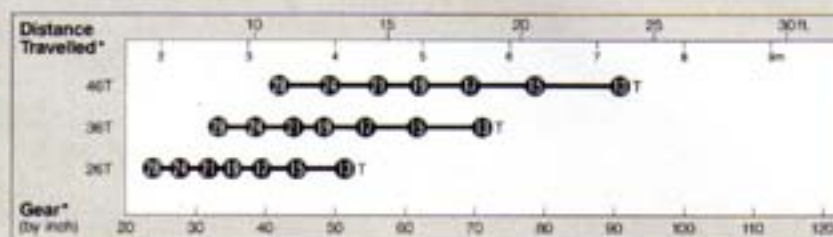

COMP MB-2

FRAME SIZE	Seattube I	Seattube II	A	B	C	D	E	F	a	b	W	X	Y	Z
26" =														
42cm	420mm	442mm	565	425	623	1040	40	40	72°	73°30'	62	28.8"	294.0	466
46cm	460mm	472mm	575	425	626	1043	40	40	72°	73°30'	62	30.0"	294.0	448
52cm	520mm	502mm	585	425	630	1048	40	40	72°	73°	62	31.1"	294.0	439
56cm	560mm	532mm	595	425	640	1057	40	40	72°	73°	62	32.2"	294.0	440


Wheel Diameter = 668mm Seatube Diameter = 28.6mm

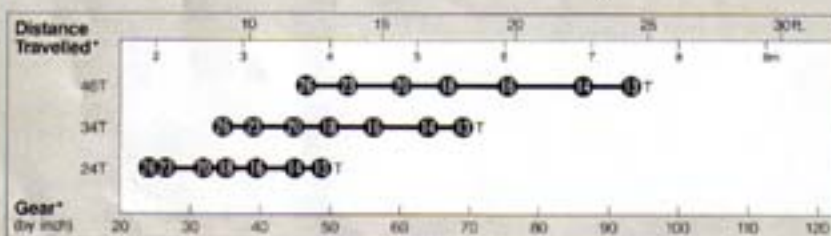

TRAILBLAZER MB-6

FRAME SIZE	Seattube I	Seattube II	A	B	C	D	E	F	a	b	W	X	Y	Z
26" =														
42cm	420mm	391mm	550	425	625	1041	40	40	71°30'	73°30'	62	27.0"	287.0	510
46cm	460mm	431mm	565	425	630	1047	40	40	72°	73°30'	59	28.5"	287.0	492
49cm	490mm	463mm	575	425	633	1050	40	40	72°	73°30'	59	29.7"	287.0	470
52cm	520mm	497mm	585	425	634	1050	40	40	72°	73°	59	30.8"	287.0	449
56cm	560mm	529mm	595	425	641	1058	40	40	72°	73°	59	31.9"	287.0	442
58cm	580mm	559mm	610	425	642	1061	40	40	72°	72°	59	32.6"	287.0	437


Wheel Diameter = 654mm Seatube Diameter = 28.6mm

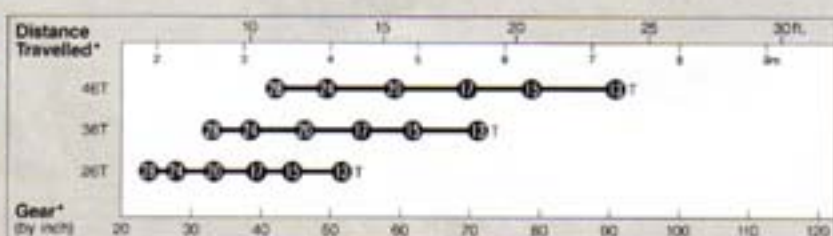

COMP MB-3

FRAME SIZE	Seattube I	Seattube II	A	B	C	D	E	F	a	b	W	X	Y	Z
26" =														
42cm	420mm	402mm	550	425	621	1037	40	40	71°30'	73°30'	68	27.4"	294.0	489
46cm	460mm	442mm	565	425	623	1040	40	40	72°	74°30'	62	28.9"	294.0	466
49cm	490mm	472mm	575	425	626	1043	40	40	72°	73°30'	62	30.0"	294.0	448
52cm	520mm	502mm	585	425	630	1048	40	40	72°	73°	62	31.1"	294.0	439
56cm	560mm	532mm	595	425	640	1057	40	40	72°	73°	62	32.2"	294.0	440


Wheel Diameter = 668mm Seatube Diameter = 28.6mm

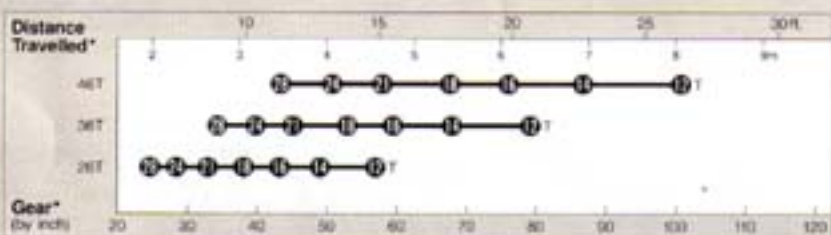

CITYLIMIT CB-2

FRAME SIZE	Seattube I	Seattube II	A	B	C	D	E	F	a	b	W	X	Y	Z
26" =														
16.5"	435mm	405mm	520	445	557	1044	41	50	70°	73°	66	27.1"	286.0	461
18"	471mm	445mm	534	445	603	1050	41	50	70°	73°	66	28.6"	286.0	428
20"	522mm	497mm	560	445	604	1051	41	50	71°	72°	60	30.4"	286.0	406
22"	570mm	546mm	570	445	615	1062	41	50	71°	72°	60	32.3"	286.0	401
17" S	433mm	406mm	523	445	557	1044	41	50	70°	73°	66	27.2"	286.0	—
19" S	482mm	457mm	523	445	557	1044	41	50	70°	73°	66	29.0"	286.0	—


Wheel Diameter = 654mm Seatube Diameter = 28.6mm

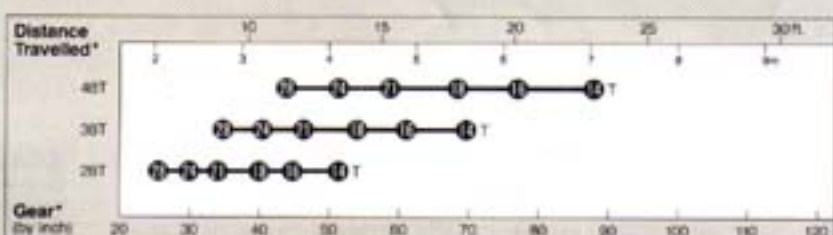

TRAILBLAZER MB-4

FRAME SIZE	Seattube I	Seattube II	A	B	C	D	E	F	a	b	W	X	Y	Z
26" =														
42cm	420mm	391mm	550	425	625	1041	40	40	71°30'	73°30'	62	27.0"	287.0	510
46cm	460mm	431mm	565	425	630	1047	40	40	72°	73°30'	59	28.5"	287.0	492
49cm	490mm	463mm	575	425	633	1050	40	40	72°	73°30'	59	29.7"	287.0	470
52cm	520mm	497mm	585	425	634	1050	40	40	72°	73°	59	30.8"	287.0	449
56cm	560mm	529mm	595	425	641	1058	40	40	72°	73°	59	31.9"	287.0	442


Wheel Diameter = 654mm Seatube Diameter = 28.6mm

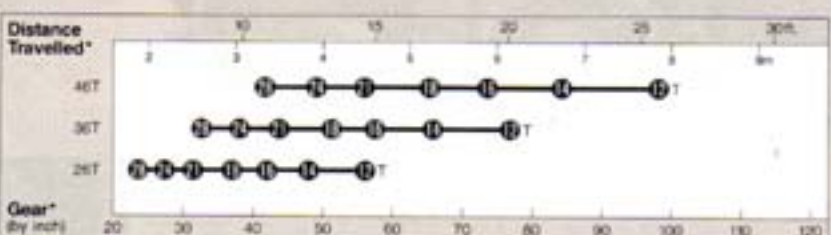





CITYLIMIT CB-3

FRAME SIZE	Seattube I	Seattube II	A	B	C	D	E	F	a	b	W	X	Y	Z
26" =														
16"	471mm	445mm	534	445	603	1050	41	50	70°	73°	66	28.6"	286.0	428
20"	522mm	497mm	560	445	604	1051	41	50	71°	72°	60	30.4"	286.0	406
22"	570mm	546mm	570	445	615	1062	41	50	71°	72°	60	32.3"	286.0	401
17" S	433mm	406mm	523	445	557	1044	41	50	70°	73°	66	27.2"	286.0	—

Wheel Diameter = 654mm Seatube Diameter = 28.6mm

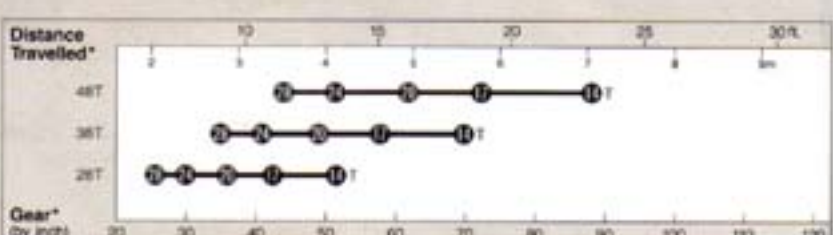


A: Top tube B: Rear center C: Front center D: Wheel base E: B.B. drop F: Off set a: Head angle b: Seat angle W: Trail X: Stand-over height (inch) Y: B.B. height Z: Cockpit

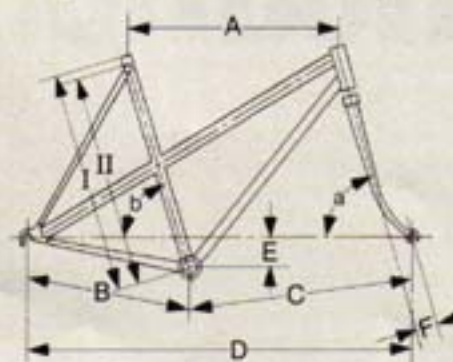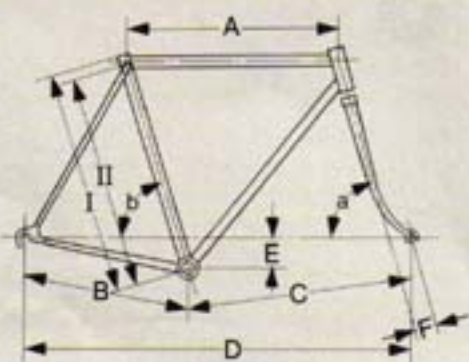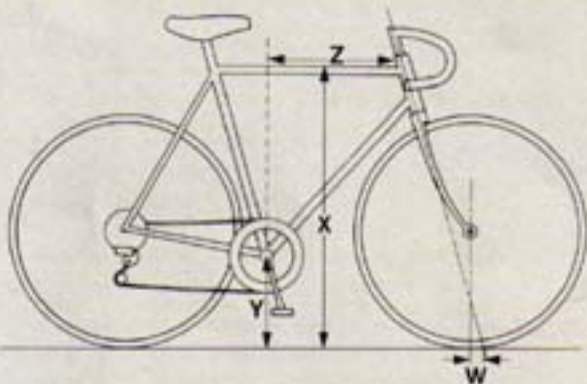

CITILIMIT CB-4

FRAME SIZE		A	B	C	D	E	F	a	b	W	X	Y	Z
26" x	Seattube I / Seattube II												
18"	471mm / 445mm	534	445	603	1050	41	50	70°	73°	66	28.6"	266.0	428
20"	522mm / 497mm	560	445	604	1051	41	50	71°	73°	60	30.4"	266.0	406
22"	570mm / 546mm	570	445	615	1062	41	50	71°	73°	60	32.3"	266.0	401
24" (24.5")	613mm / 590mm	600	422	557	983	26	50	69°	70°	62	27.3"	275.0	348
17" S	433mm / 408mm	523	445	597	1044	41	50	70°	73°	66	27.2"	266.0	—


Wheel Diameter = 654mm (26") / 602mm Top Tube Diameter = 28.6mm

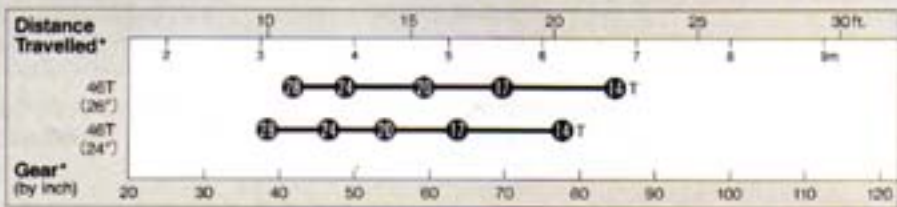

SYNERGY RB-2

FRAME SIZE		A	B	C	D	E	F	a	b	W	X	Y	Z
700C x	Seattube I / Seattube II												
48cm	480mm / 462mm	510	415	573	978	70	50	71°30'	74°30'	60	28.5"	267.0	398
51cm	510mm / 492mm	525	415	582	987	70	50	72°00'	74°30'	57	29.7"	267.0	394
53cm	530mm / 512mm	525	415	583	987	70	50	72°00'	74°30'	57	30.4"	267.0	388
56cm	560mm / 542mm	555	415	595	1000	70	45	73°00'	74°00'	56	31.5"	267.0	406
58cm	590mm / 572mm	570	415	600	1005	70	45	73°30'	73°30'	53	32.6"	267.0	407
63cm	630mm / 612mm	580	415	606	1012	65	45	73°30'	73°00'	53	34.3"	272.0	401


Wheel Diameter = 678mm Top Tube Diameter = 25.4mm

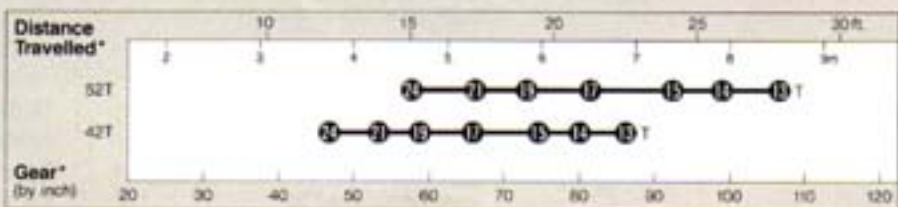

RADAC 3100

FRAME SIZE		A	B	C	D	E	F	a	b	W	X	Y	Z
700C x	Seattube I / Seattube II												
49cm	490mm / 488mm	520	415	580	987	65	50	71°45'	74°15'	58	29.1"	272.0	403
51cm	510mm / 489mm	530	415	587	992	70	50	72°00'	74°30'	57	29.7"	267.0	401
53cm	530mm / 509mm	530	415	587	992	70	50	72°00'	74°30'	57	30.4"	267.0	384
55cm	550mm / 529mm	540	415	584	989	70	45	73°00'	74°30'	56	31.2"	267.0	399
57cm	570mm / 549mm	550	415	595	1000	70	45	73°00'	74°30'	56	32.0"	267.0	403
59cm	590mm / 569mm	555	415	595	1000	70	45	73°00'	74°30'	56	32.7"	267.0	398
61cm	610mm / 589mm	580	415	600	1005	70	45	74°00'	73°00'	50	33.4"	267.0	407


Wheel Diameter = 674mm Top Tube Diameter = 28.6mm

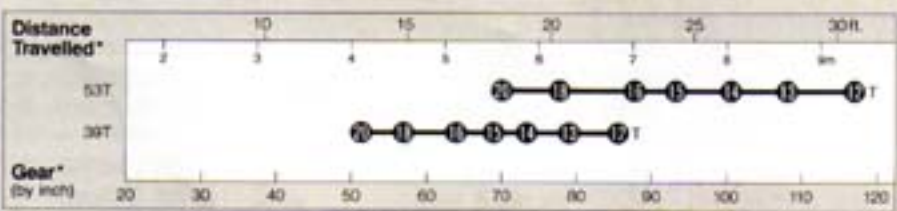

SYNERGY RB-3

FRAME SIZE		A	B	C	D	E	F	a	b	W	X	Y	Z
700C x	Seattube I / Seattube II												
49cm	495mm / 480mm	525	410	581	981	68	45	73°	75°30'	57	29.4"	270.0	413
53cm	535mm / 520mm	540	410	584	984	69	45	73°	74°30'	57	30.9"	270.0	401
57cm	575mm / 561mm	565	410	586	987	67	40	74°	73°30'	58	32.5"	272.0	406
63cm	632mm / 617mm	595	410	610	1011	67	40	74°	73°	56	34.4"	272.0	415


Wheel Diameter = 678mm Top Tube Diameter = 25.4mm

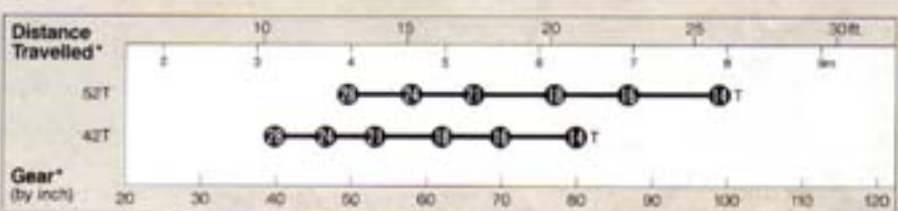

RADAC 2100

FRAME SIZE		A	B	C	D	E	F	a	b	W	X	Y	Z
700C x	Seattube I / Seattube II												
49cm	490mm / 489mm	520	415	580	987	65	50	71°45'	74°15'	58	29.1"	272.0	403
51cm	510mm / 489mm	530	415	587	992	70	50	72°00'	74°30'	57	29.7"	267.0	401
53cm	530mm / 509mm	530	415	587	992	70	50	72°00'	74°30'	57	30.4"	267.0	384
55cm	550mm / 529mm	540	415	584	989	70	45	73°00'	74°30'	56	31.2"	267.0	399
57cm	570mm / 549mm	550	415	595	1000	70	45	73°00'	74°30'	56	32.0"	267.0	403
59cm	590mm / 569mm	555	415	595	1000	70	45	73°00'	74°30'	56	32.7"	267.0	398
61cm	610mm / 589mm	580	415	600	1005	70	45	74°00'	73°00'	50	33.4"	267.0	407


Wheel Diameter = 678mm Top Tube Diameter = 28.6mm

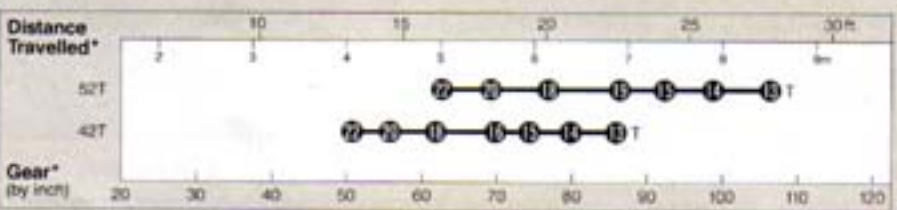

SYNERGY SPORT RB-4

FRAME SIZE		A	B	C	D	E	F	a	b	W	X	Y	Z
27" x	Seattube I / Seattube II												
19"	483mm / 467mm	515	435	587	1023	63	65	71°	73°	50	29.1"	281.0	398
21"	534mm / 518mm	540	435	585	1014	68	55	72°	73°	54	30.8"	276.0	389
23"	584mm / 568mm	550	435	596	1025	68	55	72°	73°	54	32.6"	276.0	384
25"	635mm / 619mm	554	435	601	1030	68	55	72°	73°	54	34.5"	276.0	373
19.5" M	496mm / 479mm	—	438	604	1038	62	50	73°	73°	53	29.5"	282.0	—


Wheel Diameter = 688mm Top Tube Diameter = 25.4mm

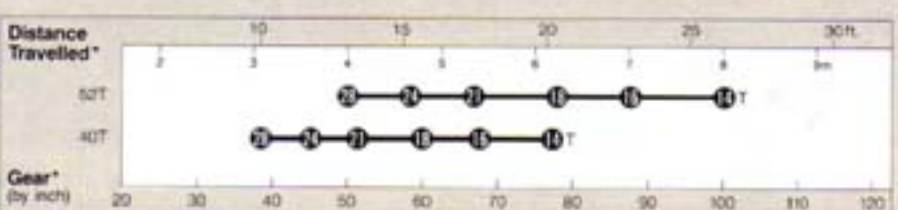

SYNERGY RB-1

FRAME SIZE		A	B	C	D	E	F	a	b	W	X	Y	Z
700C x	Seattube I / Seattube II												
48cm	480mm / 482mm	510	415	573	978	70	50	71°30'	74°30'	60	28.5"	267.0	398
51cm	510mm / 492mm	525	415	582	987	70	50	72°00'	74°30'	57	29.7"	267.0	394
53cm	530mm / 512mm	525	415	583	987	70	50	72°00'	74°30'	57	30.4"	267.0	388
56cm	560mm / 542mm	555	415	595	1000	70	45	73°00'	74°00'	56	31.5"	267.0	406
58cm	590mm / 572mm	570	415	600	1005	70	45	73°30'	73°30'	53	32.6"	267.0	407
63cm	630mm / 612mm	580	415	606	1012	65	45	73°30'	73°00'	53	34.3"	272.0	401


Wheel Diameter = 678mm Top Tube Diameter = 25.4mm

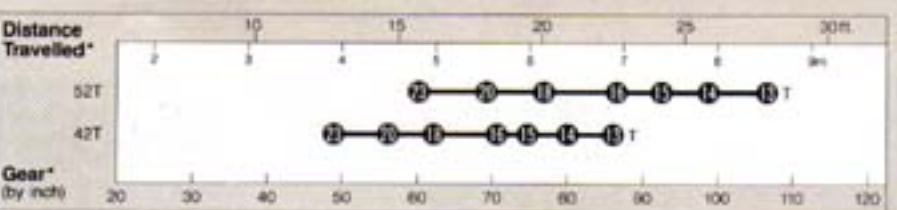

SYNERGY SPORT RB-5

FRAME SIZE		A	B	C	D	E	F	a	b	W	X	Y	Z
27" x	Seattube I / Seattube II												
19"	483mm / 467mm	515	435	587	1023	63	65	71°	73°	50	29.1"	281.0	398
21"	534mm / 518mm	540	435	585	1014	68	55	72°	73°	54	30.8"	276.0	389
23"	584mm / 568mm	550	435	596	1025	68	55	72°	73°	54	32.6"	276.0	384
25"	635mm / 619mm	554	435	601	1030	68	55	72°	73°	54	34.5"	276.0	373
19.5" M	496mm / 479mm	—	438	604	1038	62	50	73°	73°	53	29.5"	282.0	—

Wheel Diameter = 688mm Top Tube Diameter = 25.4mm

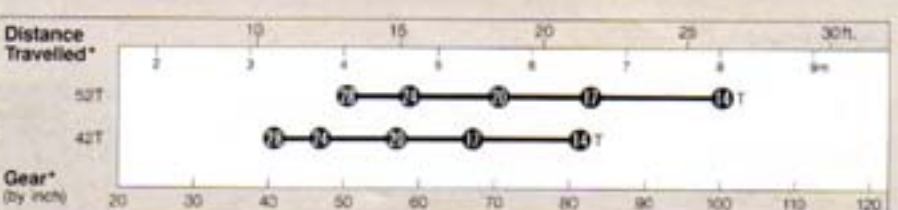

Specifications

MODEL		COMP MB-1	COMP MB-2	COMP MB-3	TRAILBLAZER MB-4
FRAME	FRAME SIZE	46cm (18.1") 52cm (20.5") 49cm (19.3") 55cm (21.7")	46cm (18.1") 52cm (20.5") 49cm (19.3") 55cm (21.7")	42cm (16.5") 52cm (20.5") 46cm (18.1") 55cm (21.7") 49cm (19.3")	42cm (16.5") 52cm (20.5") 46cm (18.1") 55cm (21.7") 49cm (19.3")
	FRAME	TANGE PRESTIGE CrMo double-butted tubing, TANGE PRESTIGE CrMo seat and chain stay Lugged construction Forged vertical dropout	ISHIWATA CrMo oversized triple-butted tubing CrMo seat & chain stay Lugged construction Forged vertical dropout	ISHIWATA CrMo oversized triple-butted tubing CrMo seat & chain stay Lugged construction Forged vertical dropout	TANGE CrMo oversized triple-butted tubing CrMo seat & chain stay Tig welded Forged vertical dropout
	FRONT FORK	TANGE/KOSKI Dura-Trac™ CrMo oversized blade & steerer Tig welded Uni-crown Investment cast tip	TANGE/KOSKI Dura-Trac™ CrMo oversized blade & steerer Tig welded Uni-crown Investment cast tip	CrMo oversized blade & steerer Tig welded Uni-crown Investment cast tip	CrMo oversized blade & steerer Tig welded Uni-crown Forged tip
	BRAZED-ON	Bottle mount (2), Cantilever boss, Chain hanger, Cable stops	Bottle mount (2), Cantilever boss, Chain hanger, Cable stops, Rear rack mount	Bottle mount (2), Cantilever boss, Chain hanger, Cable stops, Rear rack mount	Bottle mount (2), Cantilever boss, Chain hanger, Cable stops, Rear rack mount
	HEADSET	TANGE FALCON, black, sealed Italian size Stack height: 41mm	TANGE FALCON, black, sealed Italian size Stack height: 41mm	TANGE FALCON, black, sealed Italian size Stack height: 41mm	Steel, black
	SEATPIN	SANSIN QR, Quick-Lock	SANSIN QR, Quick-Lock	SANSIN QR, Quick-Lock	CrMo, QR
DRIVETRAIN	DERAILLEUR	SHIMANO DEORE-XT-II, 7-speed SIS	SUNTOUR XC-9010, 7-speed ACCUSHIFT	SHIMANO DEORE-II, 7-speed SIS	SHIMANO Mountain-LX, 7-speed SIS
	CRANKSET	SHIMANO DEORE-XT 43 x 36 x 26T, biopace-high performance ring	SUNTOUR XC-9000 46 x 34 x 24T	SHIMANO DEORE 46 x 36 x 26T, biopace-high performance ring	SHIMANO Mountain-LX 46 x 36 x 26T, biopace-high performance ring
	PEDAL	SHIMANO DEORE-XT Comp/ FISHER toe clip & strap	SR CTP-400, black cage/ FISHER toe clip & strap	SR CTP-400, black cage/ FISHER toe clip & strap	VICTOR VP-330F, AL, black cage/ Toe clip & strap
	FREEWHEEL	SHIMANO DEORE-XT-II 12 x 14 x 16 x 18 x 21 x 24 x 28T, cassette, hyper-glide	SUNTOUR XC-9000 13 x 14 x 16 x 18 x 20 x 23 x 26T, cassette	SHIMANO DEORE-II 12 x 14 x 16 x 18 x 21 x 24 x 28T, cassette, hyper-glide	SHIMANO DEORE-II 12 x 14 x 16 x 18 x 21 x 24 x 28T, cassette, hyper-glide
	CHAIN	SHIMANO DEORE-XT-II	DID LANNER, narrow	SHIMANO DEORE-II	SHIMANO DEORE-II
WHEEL	HUB	SHIMANO DEORE-XT-II, cassette, 32H, QR	SUNTOUR XCD-6000, cassette, 32H, QR	SHIMANO DEORE-II, cassette, 32H, QR	SHIMANO Mountain-LX, cassette, 36H, QR
	RIM	RITCHEY super-hard anodized, 32H	RITCHEY super-hard anodized, 32H	RITCHEY, anodized, 32H	ARAYA, RX-7, anodized, 36H
	TIRE/TUBE	RITCHEY DURO, 26 x 2.0", kevlar bead, skin side presta valve	RITCHEY FORCE, 26 x 2.0", skinside presta valve	RITCHEY FORCE, 26 x 2.0", skinside presta valve	RITCHEY 26 x 1.60", skinside presta valve
	SPOKE	WHEELSMITH # 14-15 stainless	WHEELSMITH # 14 stainless	WHEELSMITH # 14 stainless	# 14 stainless
BRAKE		SHIMANO DEORE-XT-II, cantilever, SLR/2 finger lever	DIA-COMPE 984, cantilever/ ADVANTAGE 5 short lever	SHIMANO DEORE-II, cantilever, SLR/2 finger lever	SHIMANO Mountain-LX, cantilever, SLR/Mountain-LX lever
OTHERS	SADDLE	AVOCET RACING 1 leather	AVOCET RACING	AVOCET RACING	AVOCET TOURING
	PILLAR	NITTO CRYSTAL 300L	SR MTE-300, 300L	SR MTE-300, 300L	KALLOY SP-243, AL, 300L
	HANDLEBAR	TANGE PRESTIGE, CrMo, black, 580W Biconical grip	RITCHEY, AL, black, 580W Biconical grip	RITCHEY, AL, black, 580W Biconical grip	RITCHEY, AL, black, 580W Biconical grip
	STEM	RITCHEY CrMo, black 130L 10° rise	RITCHEY CrMo, black, 130L 10° rise	RITCHEY CrMo, black, 130L 10° rise	RITCHEY CrMo, painted, 130L 18° rise
ACCESSORY					
FRAME COLOR		Classic White/Solid Gray	Scarlet/Classic White	Solid Black/Dark Gray Scarlet	Solid Gray/Neutral Gray Copen Blue/Turquoise Green (fade)
WEIGHT		26.8 lbs (49cm)	27.5 lbs (49cm)	28.5 lbs (49cm)	28.8 lbs (49cm)

TRAILBLAZER MB-5	TRAILBLAZER MB-6	CITYLIMIT CB-2	CITYLIMIT CB-3	CITYLIMIT CB-4
42cm (16.5") 52cm (20.5") 46cm (18.1") 55cm (21.7") 49cm (19.3")	42cm (16.5") 52cm (20.5") 46cm (18.1") 55cm (21.7") 49cm (19.3") 58cm (22.8")	16.5" (41.9cm) Ladies' 18" (45.7cm) 17" (43.2cm) 20" (50.8cm) 18" (45.7cm) 22" (55.9cm)	18" (45.7cm) Ladies' 20" (50.8cm) 17" (43.2cm) 22" (55.9cm)	18" (45.7cm) Ladies' 20" (50.8cm) 17" (43.2cm) 22" (55.9cm) (24 x) 17" (43.2cm)
TANGE CrMo oversized plain gauge tubing CrMo seat & chain stay Tig welded Forged vertical dropout	TANGE CrMo oversized plain gauge tubing CrMo seat & chain stay Tig welded Forged vertical dropout	ISHIWATA CrMo oversized plain gauge tubing Tig welded Forged vertical dropout	ISHIWATA Carbonsteel oversized tubing Tig welded Forged vertical dropout	ISHIWATA Carbonsteel oversized tubing Tig welded
CrMo oversized blade & steerer Tig welded Uni-crown Forged tip	CrMo oversized blade & steerer Tig welded Uni-crown Forged tip	Hi-Tensile oversized blade Tig welded Uni-crown Forged tip	Carbonsteel oversized blade Tig welded Uni-crown Forged tip	Carbonsteel oversized blade Tig welded Uni-crown
Bottle mount (2), Cantilever boss, Chain hanger, Cable stops, Rear rack mount	Bottle mount (2), Cantilever boss, Chain hanger, Cable stops, Rear rack mount	Bottle mount (2), Cantilever boss, Chain hanger, Cable guides & stops, Rear rack mount	Bottle mount (2), Cantilever boss, Chain hanger, Cable guides & stops, Rear rack mount	Bottle mount (2), Chain hanger, Cable guides & stops, Rear rack mount
Steel, black	Steel, black	Steel, black	Steel	Steel
CrMo, QR	CrMo, QR	CrMo, QR	CrMo, recessed	CrMo, recessed
SUNTOUR XCE-4050, 7-speed ACCUSHIFT	SUNTOUR XCM-3040, ACCUSHIFT	SHIMANO EXAGE-Country, SIS	SHIMANO (F) AX55 (R) R552GS, SIS, MS52 lever	SHIMANO TOURNEY, MT32 lever
SUNTOUR XCE-4050 46 x 36 x 26T, black ring	SR SXC-T310 46 x 36 x 26T, black ring	SHIMANO EXAGE-Country, 48 x 38 x 28T, biopace black ring	SR CTC-T6268L2 48 x 38 x 28T	SR CTC-6218L2 46T
VICTOR VP-870, black/ Toe clip & strap	VICTOR VP-870, black	VICTOR VP-768	VICTOR VP-768	VICTOR VP-767
SUNTOUR 13 x 15 x 17 x 19 x 21 x 24 x 28T	SUNTOUR α 13 x 15 x 17 x 20 x 24 x 28T	SHIMANO Z012 14 x 16 x 18 x 21 x 24 x 28T	SHIMANO Z012 14 x 17 x 20 x 24 x 28T	SHIMANO Z012 14 x 17 x 20 x 24 x 28T
SUNTOUR GPX	SUNTOUR Z	SHIMANO UG	SHIMANO UG	SHIMANO UG
J.Y. (F) #851SE, (R) #852SE, AL, sealed, 36H, QR	J.Y. (F) #851SE, (R) #852SE, AL, sealed, 36H, QR	J.Y. (F) #414SE, QR (R) #211SE, sealed, black, 36H	J.Y. (F) #414, QR, (R) #211, black, 36H	J.Y. (F) #414, (R) #211, 36H
ARAYA 7XN, 36H	ARAYA 7XN, 36H	ARAYA MP-22, AL, 36H	ARAYA MP-22, AL, 36H	KIN LIN 22CT, 36H 26 x 1.5" (24 x 1.5": Men's 17")
RITCHEY 26 x 1.60", skinside presta valve	RITCHEY 26 x 1.60", skinside presta valve	CHENG SHIN, 26 x 1.62", skinside schrader valve	CHENG SHIN 26 x 1.62", gumside schrader valve	CHENG SHIN 26 x 1.62" (24 x 1.5"), gumside schrader valve
# 14 stainless	# 14 UCP	# 14 UCP	# 14 UCP	# 14 UCP
LEE CHI 707A, cantilever, black/ 283A lever, black	LEE CHI 704A, cantilever, black/ 238A lever, black	SHIMANO EXAGE-Country cantilever/ SLR/EXAGE-Country lever	CHANG STAR 881A, cantilever/ 380A lever	CHANG STAR 1020A, AL, sidepull/ 380A lever
AVOCET TOURING	AVOCET TOURING	VISCOUNT #2216, pig skin	VISCOUNT #2216, pig skin	VISCOUNT #2216, pig skin
KALLOY SP-242, AL, 300L	KALLOY SP-242, AL, 300L	Steel, 230L	Steel, 230L	Steel, 230L
RITCHEY AL, black, 580W Biconical grip	HSIN LUNG MTB-110, black, 580W Biconical grip	HSIN LUNG B-802, black Biconical grip	HSIN LUNG MTB-6, satin Biconical grip	HSIN LUNG MTB-6, satin Biconical grip
RITCHEY CrMo, painted, 130L 18° rise	HSIN LUNG MTS-115G-1, painted	POLYGON 104-75, painted	DELTA DMA-60, AL	KALLOY AL-219, AL
Copen Blue/Metalic Silver Seminole Red	Seminole Red/Metalic Silver Metalic Silver/Copen Blue (fade)	Solid Black Turquoise Green	Copen Blue Seminole Red	Solid Black Royal Blue
28.9 lbs (49cm)	29.5 lbs (49cm)	31.5 lbs (20")	31.9 lbs (20")	32.5 lbs (20")

Specifications

MODEL		RADAC 3100	RADAC 2100	SYNERGY RB-1	SYNERGY RB-2
FRAME	FRAME SIZE	49cm (19.3") 55cm (21.7") 51cm (20.1") 57cm (22.4") 53cm (20.9") 61cm (24.0")	49cm (19.3") 55cm (21.7") 51cm (20.1") 57cm (22.4") 53cm (20.9") 61cm (24.0")	48cm (18.9") 56cm (22.0") 51cm (20.1") 59cm (23.2") 53cm (20.9") 63cm (24.8")	48cm (18.9") 56cm (22.0") 51cm (20.1") 59cm (23.2") 53cm (20.9") 63cm (24.8")
	FRAME	BRIDGESTONE Aluminum tubing Aluminum seat & chain stay Aluminum cast lugs Aluminum micro-adjust dropout Internal top tube cable guides	BRIDGESTONE Aluminum tubing Aluminum seat & chain stay Aluminum cast lugs Aluminum micro-adjust dropout Internal top tube cable guides	ISHIWATA CrMo triple-buttet tubing CrMo seat & chain stay Italian-cut lug Forged micro-adjust dropout	ISHIWATA CrMo triple-buttet tubing CrMo seat & chain stay Italian-cut lug Forged micro-adjust dropout
	FRONT FORK	BRIDGESTONE Aluminum blade Aluminum cast crown Aluminum tip	BRIDGESTONE Aluminum blade Aluminum cast crown Aluminum tip	CrMo blade Investment semi-slope crown Forged tip	CrMo blade Investment semi-slope crown Forged tip
	BRAZED-ON	Shifter boss, Bottle stud (2), Cable & stops Internal top tube cable guides	Shifter boss, Bottle stud (2), Cable & stops	Shifter boss, Bottle mount (2), Pump peg, Chain hanger, Cable guides & stops	Shifter boss, Bottle mount (2), Pump peg, Chain hanger, Cable guides & stops
	HEADSET	SHIMANO DURA-ACE Italian size Stack height: 41mm	SHIMANO 600 ULTEGRA Italian size Stack height: 41mm	HATTA VESTA SEALED-03 Italian size Stack height: 41mm	HATTA VESTA SEALED-03 Italian size Stack height: 41mm
	SEATPIN	CrMo, recessed	CrMo, recessed	CrMo, recessed	CrMo, recessed
DRIVETRAIN	DERAILLEUR	SHIMANO DURA-ACE, 7-speed SIS	SHIMANO 600 ULTEGRA, 7-speed SIS	SUNTOUR GPX, 7-speed ACCUSHIFT	SHIMANO EXAGE Sport-LX (A452), 7-speed SIS
	CRANKSET	SHIMANO DURA-ACE 53 x 39T	SHIMANO 600 ULTEGRA 52 x 42T, biopace-high performance ring	SUNTOUR GPX 52 x 42T	SHIMANO A452, 52 x 42T, biopace ring
	PEDAL	SHIMANO DURA-ACE clipless	SHIMANO 600 ULTEGRA Toe clip & strap	SR SP-200/ Toe clip & strap	SR SP-200/ Toe clip & strap
	FREEWHEEL	SHIMANO DURA-ACE 12 x 13 x 14 x 15 x 16 x 18 x 20T, cassette	SHIMANO 600 ULTEGRA 13 x 14 x 15 x 16 x 18 x 20 x 22T, cassette	SUNTOUR α 13 x 14 x 15 x 16 x 18 x 20 x 23T	SHIMANO CS-1000 13 x 14 x 15 x 17 x 19 x 21 x 24T, cassette
	CHAIN	SHIMANO DURA-ACE	SHIMANO 600 UG, narrow	SUNTOUR GPX	SHIMANO UG, narrow
WHEEL	HUB	SHIMANO DURA-ACE, cassette, 32H, QR	SHIMANO 600 ULTEGRA, cassette, 32H, QR	SUNTOUR GPX, 32H, QR	SHIMANO A450, cassette, 36H, QR
	RIM	MAVIC MA-40, hard anodized, 32H	WOLBER GTX, hard anodized, 700C, 32H	WOLBER GTX, hard anodized, 700C, 32H	WOLBER GTX, hard anodized, 700C, 36H
	TIRE/TUBE	BRIDGESTONE 700 x 25C, foldable skinside presta valve	BRIDGESTONE 700 x 25C, semi-slick skinside presta valve	BRIDGESTONE 700 x 25C, semi-slick skinside presta valve	BRIDGESTONE 700 x 25C, semi-slick skinside presta valve
	SPOKE	WHEELSMITH # 14-15 stainless	WHEELSMITH # 14 stainless	WHEELSMITH # 14 stainless	# 14 UCP
BRAKE		SHIMANO DURA-ACE SLR/aero lever	SHIMANO 600 ULTEGRA SLR/ aero lever	SUNTOUR GPX BRS/aero lever	SHIMANO A450 SLR/ A451 aero lever
OTHERS	SADDLE	SELLA SAN MARCO ROLLS	AVOCET RACING 1 leather	AVOCET RACING	AVOCET RACING
	PILLAR	NITTO CRYSTAL, 230L	SR CRE-100, 230L	SR CRE-111, 230L	SR CRE-111, 230L
	HANDLEBAR	NITTO # 185II, European size Cushion tape	NITTO # 55, European size Cushion tape	SR CTB Cushion tape	SR CTB Cushion tape
	STEM	NITTO PEARL, European size	NITTO TECHNOMIC, European size	SR CT	SR CT
ACCESSORY					
FRAME COLOR		Silver Anodized	Silver Anodized	Black/Classic White Scarlet	Scarlet/Classic White Turquoise Green
WEIGHT		19.9 lbs (57cm)	20.8 lbs (57cm)	22.8 lbs (56cm)	23.7 lbs (56cm)

SYNERGY RB-3	SYNERGY SPORT RB-4	SYNERGY SPORT RB-5
49cm (19.3") 57cm (22.4") 53cm (20.9") 63cm (24.8")	19" (48.3cm) 25" (63.5cm) 21" (53.3cm) Ladies' 23" (58.4cm) 19.5" (49.5cm)	19" (48.3cm) 25" (63.5cm) 21" (53.3cm) Ladies' 23" (58.4cm) 19.5" (49.5cm)
ISHIWATA CrMo plain gauge main tubing Italian-cut lug Forged micro-adjust dropout	ISHIWATA Hi-Tensile main tubing Italian-cut lug Forged micro-adjust dropout	ISHIWATA Hi-Tensile main tubing Italian-cut lug Forged micro-adjust dropout
Hi-Tensile blade Semi-slope crown Forged tip	Hi-Tensile blade Forged tip	Hi-Tensile blade Forged tip
Shiftlever boss, Bottle mount (2), Pump peg, Chain hanger, Cable guides & stops	Bottle mount, Chain hanger, Cable guides & stops	Bottle mount, Chain hanger, Cable guides & stops
Steel	Steel	Steel
CrMo, recessed	CrMo, recessed	CrMo, recessed
SHIMANO EXAGE-Action (A350), SIS	SHIMANO EXAGE-Motion (A250), SIS	SHIMANO (F) AX50, (R) R552SS, SIS, S452 lever
SHIMANO A350 52 x 42T, biopace black ring	SHIMANO A250 52 x 40T, biopace black ring	SR CTC-626BL2 52 x 42T
VICTOR VP-389, AL/ Toe clip & strap	VICTOR VP-378	VICTOR VP-378
SHIMANO Z012 14 x 16 x 18 x 21 x 24 x 28T	SHIMANO Z012 14 x 16 x 18 x 21 x 24 x 28T	SHIMANO Z012 14 x 17 x 20 x 24 x 28T
SHIMANO UG	SHIMANO UG	SHIMANO UG
J.Y. (F) #851SE, (R) #852SE, sealed, 36H, QR	J.Y. (F) #301, QR (R) #211, black, 36H	J.Y. (F) #301, (R) #211, CP, 36H
WEINMANN 116, 700 x 25C, AL, 36H	WEINMANN 116, 27 x 1-1/4", AL, 36H	CMC 27 x 1-1/4", steel, 36H
CHENG SHIN, 700 x 25C, skinside presta valve	CHENG SHIN, 27 x 1-1/8", skinside schrader valve	CHENG SHIN, 27 x 1-1/4", gumside schrader valve
# 14 UCP	# 14 UCP	# 14 UCP
SHIMANO A350 SLR/ A351 aero lever	SHIMANO A250 SLR/ A251 aero lever	LEE CHI N630A/143A lever
AVOCET RACING	AVOCET TOURING	VISCOUNT #2280
KALLOY SP-200, AL 230L	Steel, 230L	Steel, 230L
SR CMB-300, AL sleeve Cushion tape	SR-CMB-300 AL sleeve Cushion tape	HSIN LUNG DR-8, AL sleeve/ Form type
SR CTS	SR CTS	DELTA DG, AL
Solid Black/Pearl Gray Royal Blue	(M) Copen blue/Metallic Silver, Scarlet (L) Copen Blue, Scarlet	(M) Seminole Red/Metallic Silver, Solid Black (L) Seminole Red, Solid Black
25.8 lbs (57cm)	27.8 lbs (23")	30.9 lbs (23")



BRIDGESTONE BICYCLE LIMITED WARRANTY

Warranty:

1. Frames and front forks of Bridgestone bicycles are warranted to be free from defects in material and workmanship for lifetime from the date of purchase.
2. Original accessories of Bridgestone bicycles, as standard equipment, are warranted to be free from defects in material and workmanship for one (1) year from the date of purchase. (Excludes accessories added on by dealer or consumer).

Limitations and exclusions:


1. Warranty is issued to, and for the exclusive benefit of, the original purchaser of Bridgestone bicycles and is not assignable to subsequent purchasers or users.
2. Warranty does not cover any bodily injuries, damages, or failure of the bicycles by:
 - a. Bicycle racing.
 - b. Motocross, stunt, acrobatic riding, ramp jumping and similar activities.
 - c. Usage as a power-propelled vehicle.
 - d. Any other misuse, abuse, neglect, or accident.
 - e. Improper assembly, improper maintenance, or alteration.
 - f. Normal wear and tear.
3. Bridgestone shall not be liable for incidental or consequential damages, except as required by laws in particular jurisdiction.
4. Except for the limited warranty mentioned herein, Bridgestone Bicycle disclaims all implied warranties.

Claims:

To qualify under the warranty, the defective part must be presented to an authorized Bridgestone bicycle dealer together with sales receipt or other proof of date of purchase showing serial number. If the claim qualifies under the terms of the warranty, Bridgestone will at its option replace or repair the defective part without charge to the original purchaser. Repair or replacement of defective parts or accessories, including labor charges therefore, constitutes the sole remedy under this warranty.

BRIDGESTONE CYCLE CO., LTD.

No. 5-14, 3-chome, Nihonbashi, Chuo-ku, Tokyo, Japan

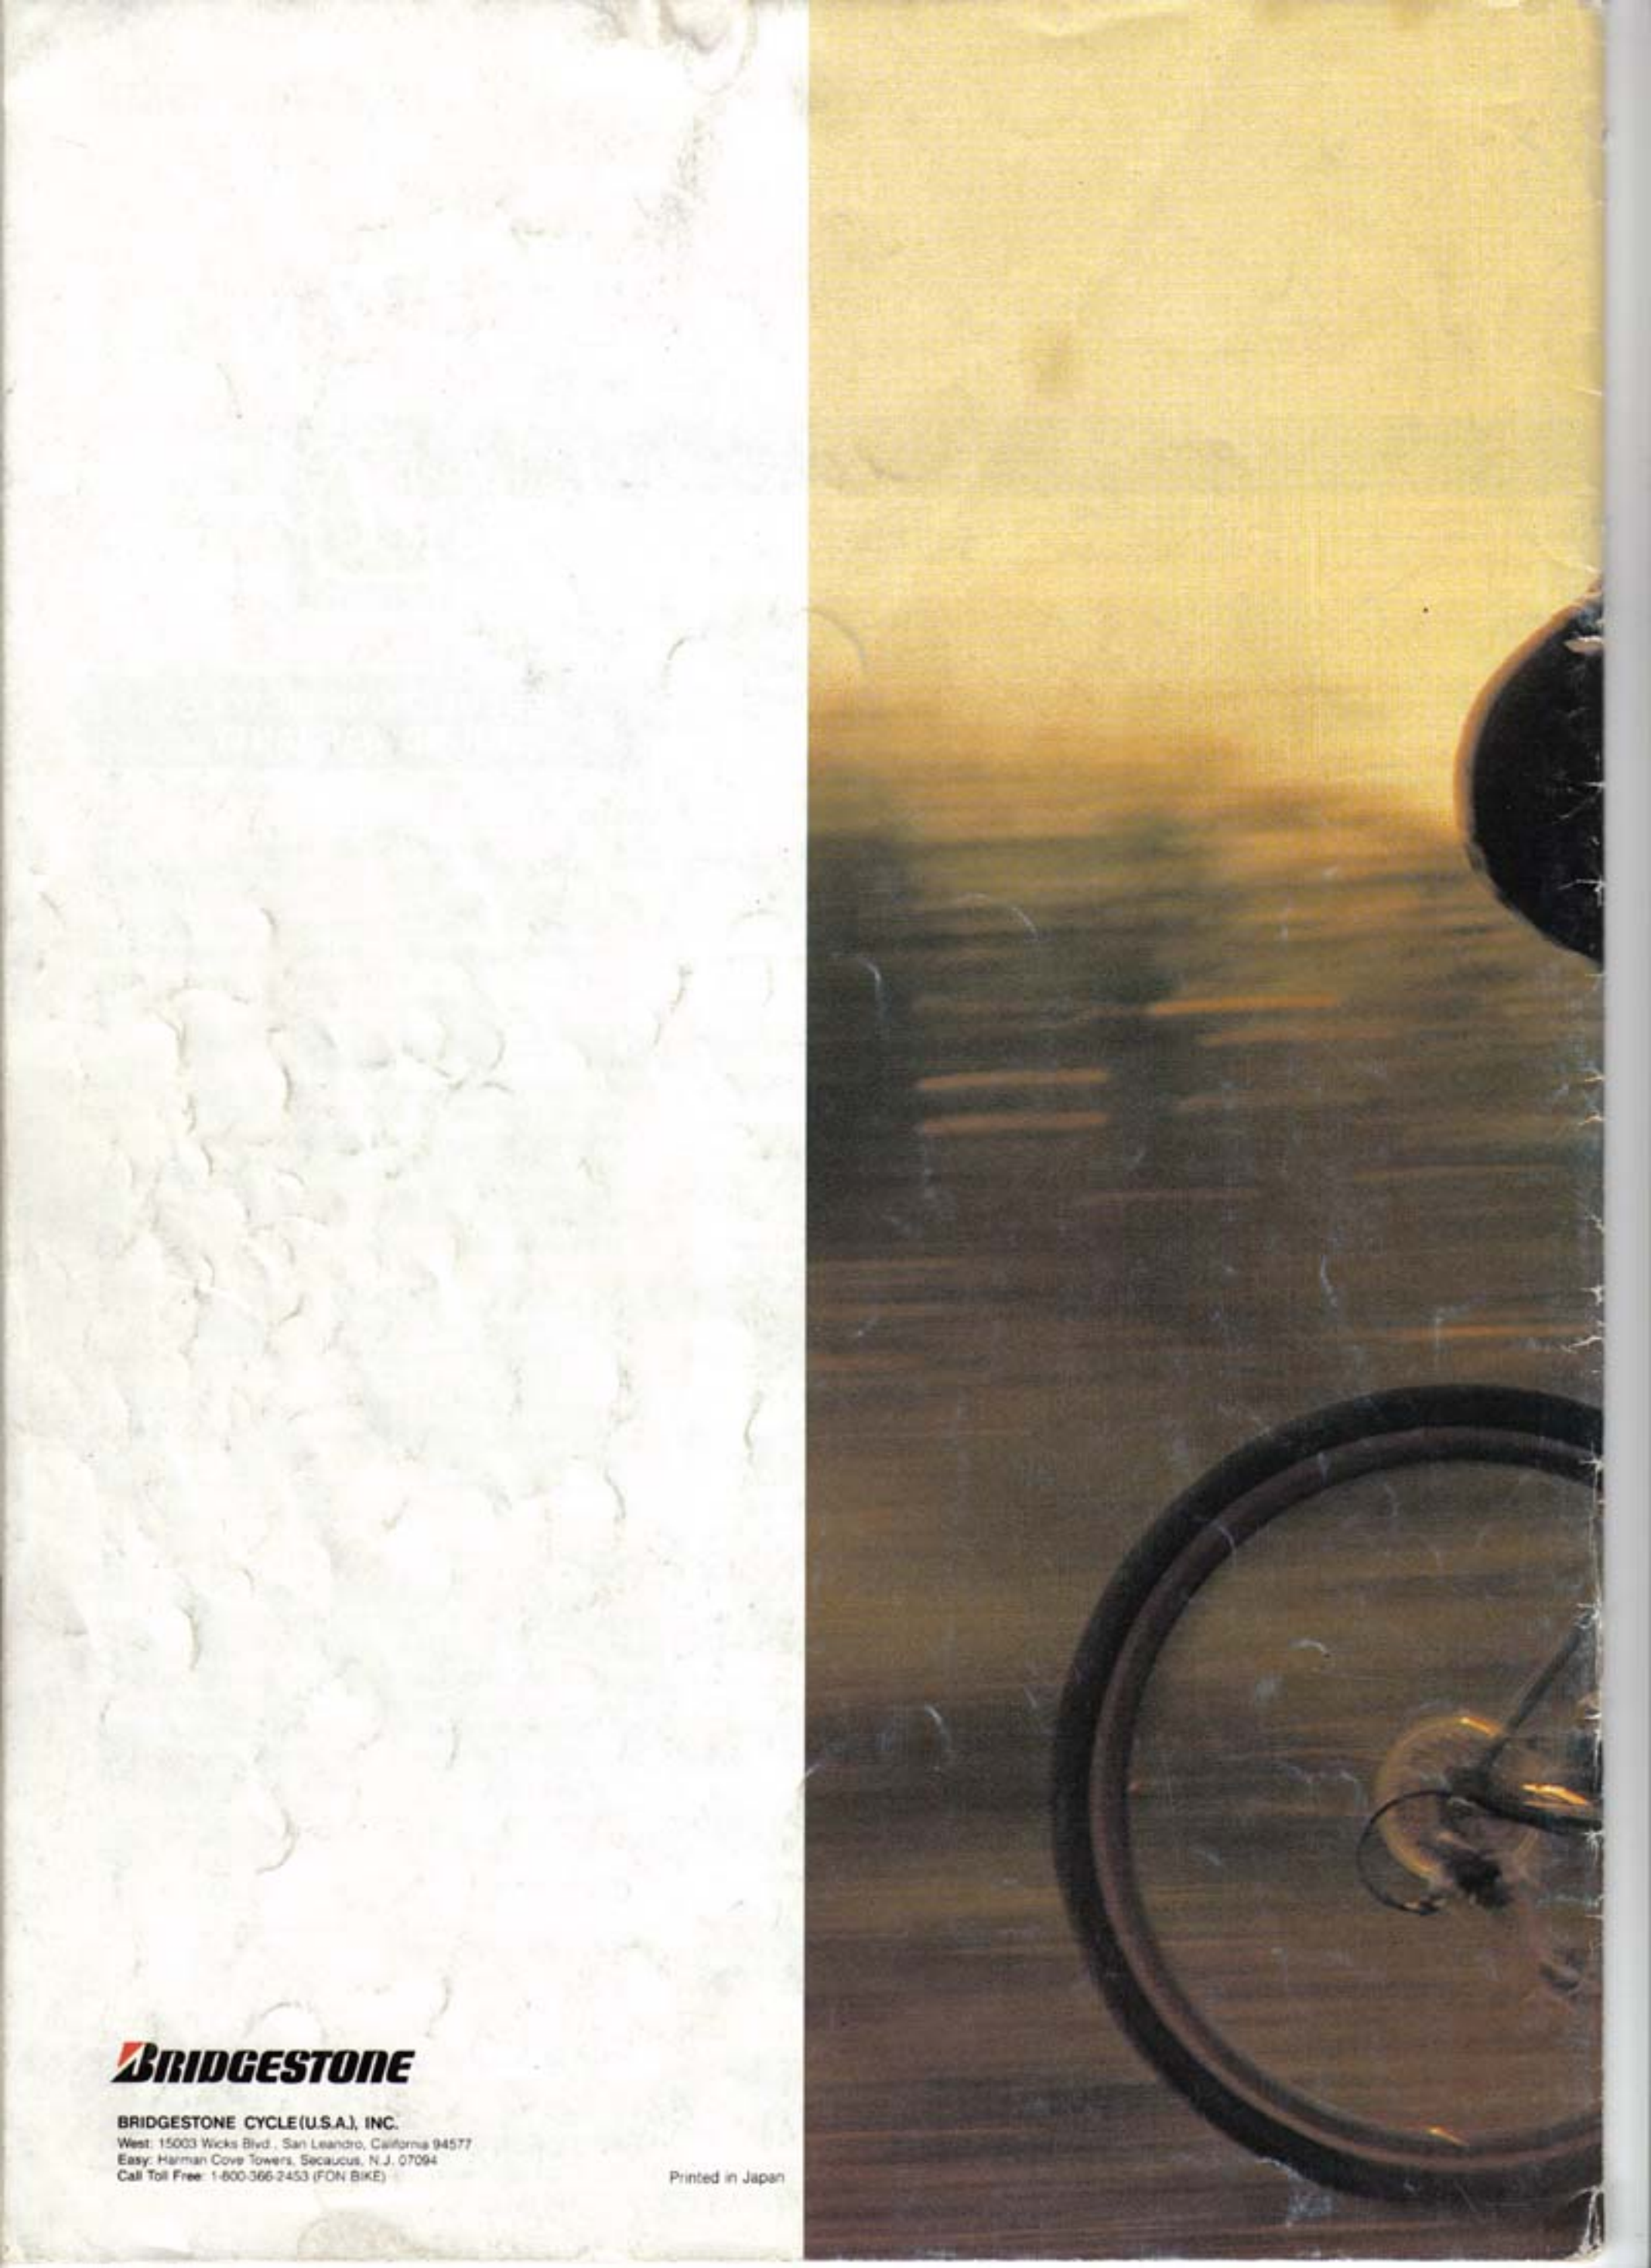

BRIDGESTONE

BRIDGESTONE CYCLE(U.S.A.), INC.
West: 15003 Wicks Blvd., San Leandro, California 94577
East: Harman Cove Towers, Secaucus, N.J. 07094
Call Toll Free: 1-800-366-2453 (FON BIKE)

Printed in Japan