



Panasonic Bicycles



Professional 7000

14 Speed



Aero Road 6000

14 Speed



Specifications


Model Number	Deluxe 4000 DR-622 DR-624
Frame Size (inches)	DR-622---22" DR-624---24" Angle 74° x 74°
Frame	Tange Cr-Mo Double butted tubes (Champion No.2) with pin stripe, Forged ends
Fork	Tange Cr-Mo, C-2 crown, Forged ends
Handlebar	SR CTD, Maes
Stem	SR CT
Saddle	Kashimax Aero, Suede, with SR CT-P5 micro adjusting seat post
Crankset	Shimano New 600 EX 42/52T
Freewheel	Shimano New 600 EX 6 speed, 13-26T
Chain	Shimano 600 UG silver 1/2" x 3/32" x 108 links
Hubs	Shimano New 600 EX, Forged alloy small flange with Q.R.
Rear Derailleur	Shimano New 600 EX
Front Derailleur	Shimano New 600 EX
Shifting Levers	Shimano New 600 EX Brazed on down tube mounted
Brakes	Shimano New 600 EX, Alloy side-pull with tire guide and gum hooded drilled levers
Rims	Araya 20A, 700C, alloy
Tires	Panasonic 700 x 25C Open side 100PSI
Spokes	Stainless 14G
Pedals	Shimano New 600 EX with reflectors
Accessories	Front, rear and side reflectors/Shiny vinyl handlebar tape/Toe clips and straps/Plastic spoke protector/Bottle and bottle cage/Allen key wrench
Color	Imperial Red

Deluxe 4000

12 Speed



DX4000 24" (610mm)

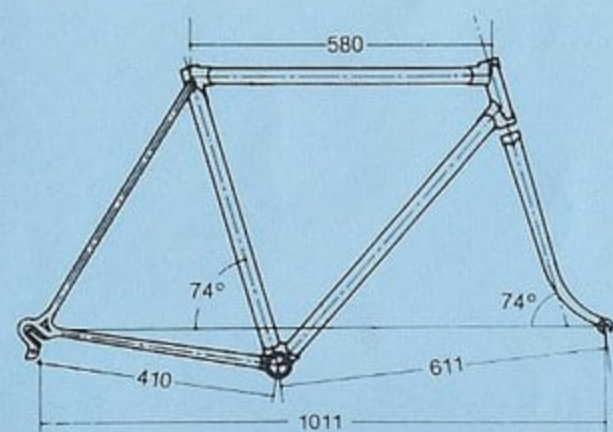

Italian cut head lug. Shimano New 600 EX head set.



Tange C-2 sloping fork crown.



Kashimax suede aero saddle and SR CT-P5 micro adjustable alloy fluted seat post.



Shimano New 600 EX forged alloy crank set and Shimano New 600 EX pedal with toe clips and straps.



Shimano New 600 EX down tube brazed on shift levers.


Specifications

Model Number	Team TM-620 TM-622 TM-624
Frame Size (inches)	TM-620---20" TM-622---22" TM-624---24" Angle 74°×74°
Frame	Tange Cr-Mo Double butted tubes (Champion No.2) with pin stripe, Forged ends
Fork	Tange Cr-Mo, AC-2 crown, Forged ends
Handlebar	SR CTD, Maes
Stem	SR CT
Saddle	Ariake Aero, with SR CT-P6 alloy fluted seat post
Crankset	Sugino AS 42/52T
Freewheel	Shimano 600 UG silver 6 speed, 13-28T
Chain	Shimano 600 UG silver 1/2" × 3/32" × 108 links
Hubs	Shimano Forged alloy small flange with Q.R.
Rear Derailleur	Shimano Z505
Front Derailleur	Shimano Z206
Shifting Levers	Shimano Z408 Brazed on down tube mounted
Brakes	Dia-Compe G500N, Alloy side-pull with tire guide and gum hooded drilled levers
Rims	Araya 20A, 700C, alloy Black anodized
Tires	Panasonic 700×25C Open side 100PSI
Spokes	Stainless 14G
Pedals	KKT Pro-Vic II B with reflectors
Accessories	Front, rear and side reflectors/Shiny vinyl handlebar tape/Toe clips and straps/Plastic spoke protector/Bottle and bottle cage/Allen key wrench/Stainless chainstay protector
Color	Sapphire Blue

Team 12 Speed



TEAM 24" (610mm)

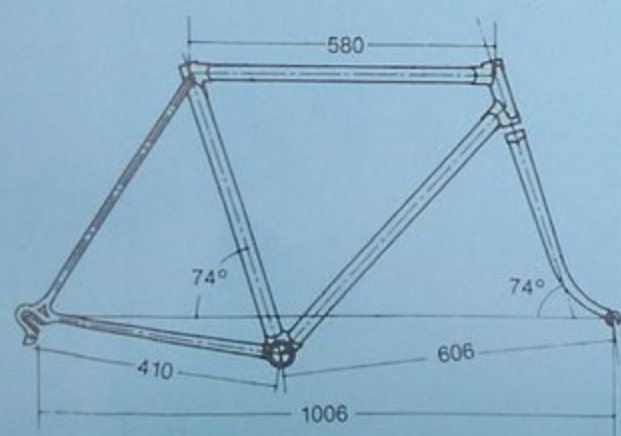


Ariake aero style saddle with alloy fluted seat post.



Dia-Compe G500N, Alloy side-pull brakes with quick release levers and recessed mounting bolt.



Sugino AS forged alloy crank set and KKT Pro Vic II pedal with toe clips and straps.

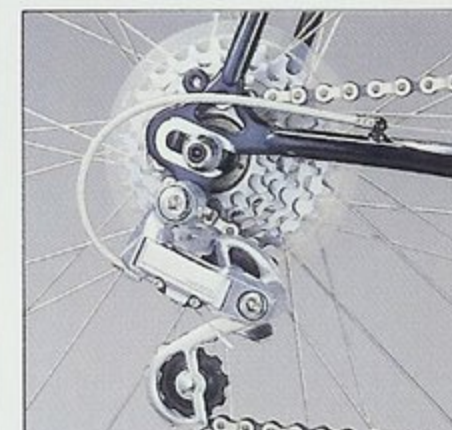

Shimano Z505 rear derailleur and Shimano 600UG silver freewheel.



Araya 700C, 20A black anodized rim. Panasonic 700×25C 100 PSI skin side tire.

Pro-Touring

18 Speed



Specifications

Model Number	Pro-Touring PT-622 PT-624
Frame Size (inches)	PT-622---22" PT-624---24" Angle 73° x 73°
Frame	Tange Cr-Mo Double butted tubes (Champion No.2) with pin stripe, Forged vertical drop out ends
Fork	Tange Cr-Mo, Forged ends
Handlebar	SR RND 420, Randonneur
Stem	SR AE
Saddle	Kashimax Anatomic, Suede with SR CT-P5 micro adjusting seat post
Crankset	Sugino TAT 34/44/50T
Freewheel	Shimano 600 UG silver 6 speed, 13-30T
Chain	Shimano 600 UG silver 1/2" x 3/32" x 114 links
Hubs	Sunshine Gyromaster sealed bearing type Front Semi large 36H W/Q.R. Rear 40H with Q.R.
Rear Derailleur	Shimano Deore XT
Front Derailleur	Shimano Deore XT
Shifting Levers	Shimano Deore XT Brazed on down tube mounted
Brakes	Shimano Deore XT cantilever brakes with gum hooded drilled levers
Rims	Araya 16A (5), 27" x 1 1/4" alloy
Tires	Panasonic 27" x 1 1/8" Open side 100PSI
Spokes	Stainless 14G
Pedals	KKT Pro-Vic II A with reflectors
Accessories	Front, rear and side reflectors/Cloth handlebar tape/Toe clips and straps/Plastic spoke protector/Bottle and bottle cage/Rear rack/Allen key wrench
Color	Wine Red




Lostwax seat lug and semi wrap-seat stay.



Forged vertical drop out forkends with dual eyelet.



Semi-Large sealed bearing hub with quick release.

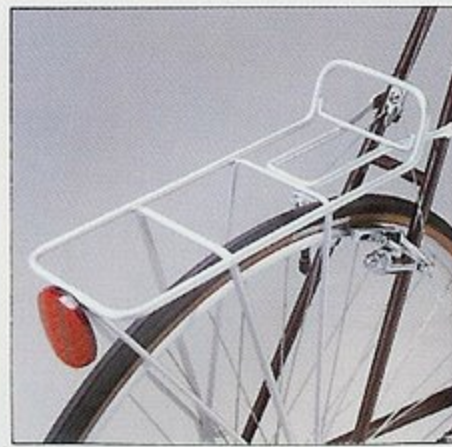


Alloy rear rack Shimano Deore XT cantilever brakes



Sugino TAT forged alloy triple crank set and KKT Pro Vic II pedals.

PRO-TOURING 24" (610mm)

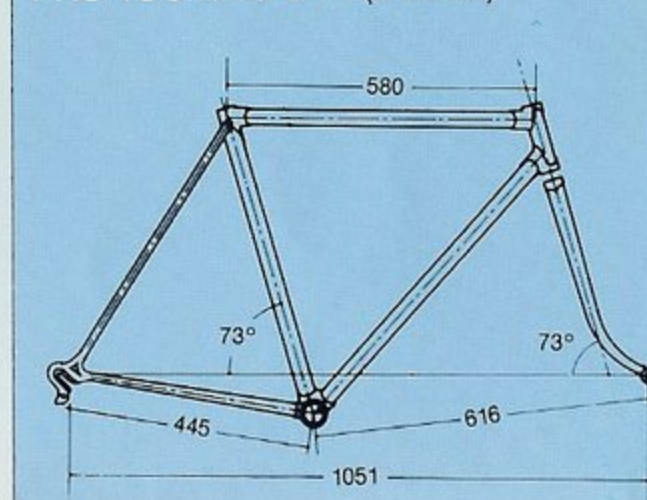

Touring Deluxe

15 Speed




Specifications

Model Number	Touring-Deluxe TD-621 TD-623 TD-625
Frame Size (inches)	TD-621---21" TD-623---23" TD-625---25" Angle 73° x 73°
Frame	Tange Cr-Mo Double butted tubes (Champion No.2) with pin stripe, Forged fork ends
Fork	High-tensile, Tange CCL crown, Forged ends
Handlebar	Kusuki WPR-B, Randonneur
Stem	Kusuki WIN Σ
Saddle	Black vinyl leatherette anatomically styled with SR CT-P6 alloy fluted seat post
Crankset	Sugino TGT 34/46/52T
Freewheel	Shimano UG black, 5 speed, 14-28T
Chain	Shimano UG black 1/2" x 3/32" x 114 links
Hubs	Shimano forged alloy small flange with Q.R.
Rear Derailleur	Shimano AL 11
Front Derailleur	Shimano AL 11
Shifting Levers	Shimano Z408
Brakes	Dia-Compe G500N side-pull with tire guide and gum hooded drilled levers
Rims	Araya Model 18, 27" x 1 1/4" alloy
Tires	Panasonic 27" x 1 1/8" Open side 100PSI
Spokes	14G U-C-P finished
Pedals	KKT Top Run with reflectors
Accessories	Front, rear and side reflectors/Cloth handlebar tape/Toe clips and straps/Plastic spoke protector/Bottle and bottle cage/Rear rack/Stainless chainstay protector
Color	Anthracite Grey



Sugino TGT forged alloy triple crankset and KKT Top-Run alloy quill pedals with toe clips and

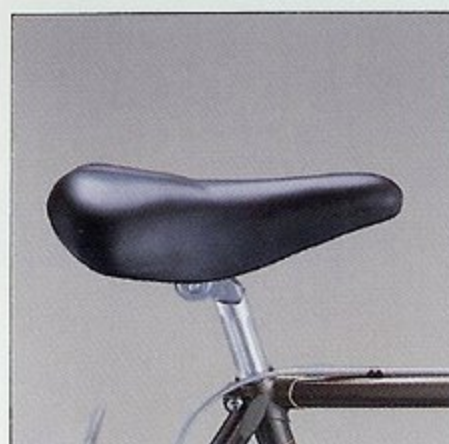

Anatomic saddle and SR CT-P6 alloy fluted seat post.



Brazed on chain rest on seat stay.




Dia-Compe G500N alloy side-pull with quick release and tire guides.



Araya 27" x 1 1/4" alloy rim. Panasonic 27" x 1 1/8" 100 PSI open side tires.

TOURING DX 23" (585mm)

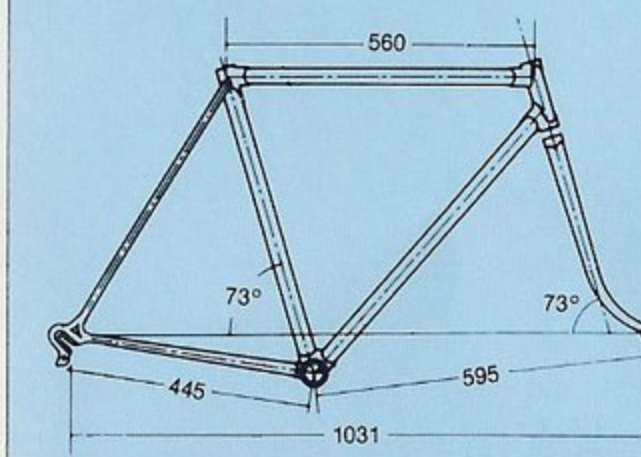

Deluxe 2000

12 Speed



Track Bike



Sport LX — Women's

12 Speed



Sport LX — Men's
12 Speed



Sport-1000 — Women's
12 Speed



Sport-1000 — Men's
12 Speed



Tourist-10 — Men's
10 Speed



Tourist-5 — Men's
5 Speed



Women's Model is Also Available

Tourist-10 — Women's
10 Speed



Tourist-3 — Women's
3 Speed



Men's Model is Also Available

Panasonic Villager III — Men's (17.5")
10 Speed



Also Available in Sport-500

All-Terrain Bike — Men's
15 Speed



Motocross



City Bike — Men's
15 Speed



Panasonic Villager III — Men's
10 Speed



Sport-500 — Men's
10 Speed



Panasonic Villager III — Women's
10 Speed



Sport-500 — Women's
10 Speed




Specifications

Model Number	Professional 7000 PR-621 PR-623 PR-625	Aero Road 6000 AR-621 AR-623 AR-625	Deluxe 2000 DX-620 DX-626 DX-622 DX-628 DX-624	Sport 1000 S-621 SL-619 S-623 SL-622 S-625 S-627	Sport LX LX-619 LX-627 LXL-619 LX-621 LXL-622 LX-623 LX-625	Track Bike TK-622 TK-624
Frame Size (inches)	PR-621---21" PR-623---23" PR-625---25" Angle 73° x 74° (21") 73° x 73° 30"	AR-621---21" AR-623---23" AR-625---25" Angle 73° x 74° 74° x 74° (25")	DX-620---20" DX-626---26" DX-622---22" DX-628---28" DX-624---24" Angle 73° x 73° 74° x 74° (26")	S-621---21" SL-619---19" S-623---23" SL-622---22" S-625---25" S-627---27" Angle 73° x 73° 72° x 72° (Men's 19", 27")	LX-619---19" LXL-619---19" LX-621---21" LXL-622---22" LX-623---23" LX-625---25" LX-627---27" Angle 73° x 73° 72° x 72° (19", 27")	TK-622---22" TK-624---24" Angle 73° x 74°
Frame	Tange Cr-Mo Double butted tubes (champion No.1), Forged fork ends	Tange Cr-Mo Aero tubes Forged fork ends	Cr-Mo main tubes with pin stripe	Cr-Mo main tubes with pin stripe	Cr-Mo main tubes with pin stripe	Cr-Mo main tubes with pin stripe
Fork	Tange Cr-Mo Aero 25 Forged ends	Tange Cr-Mo Aero 25, Forged ends	High-tensile 1020 with chrome tips	High-tensile 1020 with chrome tips	High-tensile 1020 with chrome tips	High-tensile 1020 with chrome tips
Handlebar	Nitto No.55, Maes	Kusuki WP-B, Maes	SR CTD Maes alloy	Kusuki Maes	Kusuki Maes	Nitto Model 155 alloy
Stem	Nitto Pearl	Dura-Ace AX	SR CT	Kusuki WIN-AH alloy	Kusuki WIN-AH alloy	Nitto Pearl 10, alloy
Saddle	Kashimax suede Aero with Dura-Ace EX seat post	Ariake Nu-Buck Aero with Dura-Ace AX seat post	Black vinyl leatherette anatomically styled with SR CT-P6 alloy fluted seat post	Black vinyl leatherette anatomically styled	Black vinyl leatherette	Black vinyl leatherette with alloy seat post
Crankset	Dura-Ace EX 42/52T	Dura-Ace AX 42/52T	SR CT5RG alloy 40/52T	Sugino No.5 AL-WB alloy 40/52T	Sugino forged alloy crank arms 40/52T	Sugino forged alloy 48T
Freewheel	Dura-Ace AX gold 7-speed, 13-21T	Dura-Ace AX 7-speed, 13-23T	14-28T 6-speed	14-28T 6-speed	14-28T 6-speed	16T Freewheel and 15T Fixed sprocket
Chain	HKK Z chain gold, 1/2" x 3/32" x 108 links	Dura-Ace, UG silver 1/2" x 3/32" x 110 links	Shimano UG 1/2" x 3/32" x 110 links	Shimano UG 1/2" x 3/32" x 114 links	Shimano UG 1/2" x 3/32" x 114 links,	1/2" x 1/8" x 98 links
Hubs	Dura-Ace AX alloy small flange with quick release	Dura-Ace AX alloy small flange with quick release	Shimano alloy small flange with quick release	Front ... Alloy small flange with quick release Rear ... Alloy small flange	Front ... Semi large with quick release Rear ... small large	Alloy semi large flange
Rear Derailleur	Dura-Ace EX	Dura-Ace AX	Shimano 105	Shimano Z503	Shimano Z501	—
Front Derailleur	Dura-Ace EX	Dura-Ace AX	Shimano 105	Shimano Z204	Shimano Z202	—
Shifting Lever	Dura-Ace EX down tube mounted	Dura-Ace AX, down tube mounted	Shimano 105 down tube mounted	Shimano Z401 stem mounted	Shimano Z401 stem mounted	—
Brakes	Aero Gran Compe 300, Side-pull with AGC250 levers	Dura-Ace AX, center-pull with Dura-Ace AX levers	Shimano Z570 side-pull with tire guide and gum hooded drilled levers	Shimano Z570 side-pull with quick release and extension levers	Dia-Compe 500N alloy side-pull with quick release and extension levers	Dia-Compe 500 alloy side-pull with quick release levers
Rims	Araya Aero Tubular, ADX-1	Araya Aero 700C, ADX-1W	Araya Model 18, 27" x 1 1/4", alloy	Araya Model 18, 27" x 1 1/4", alloy	Araya 27" x 1 1/4"	Araya 700C 20A narrow rim, alloy
Tires	Panaracer 300 COURSE	Panasonic 700 x 25C Racing Extra 100 PSI	Panasonic 27" x 1 1/8" Openside 100 PSI	Panasonic 27" x 1 1/4" Gum-wall crackproof 90PSI	Panasonic 27" x 1 1/4" Gum-wall crackproof 90 PSI	Panasonic 700 x 25C Racing Extra 100PSI
Spokes	Swaged stainless 14-15G	Swaged stainless 14-15G	14G U-C-P finished	14G U-C-P finished	14G U-C-P finished	14G U-C-P finished
Pedals	MKS Esquartz with reflectors	Dura-Ace AX, DD pedal with reflectors	MKS QUILL 2K with reflectors	KKT RT-E with reflectors	KKT RT-E with reflectors	KKT No.50 with reflectors
Accessories	Front, rear and side reflectors/Plastic spoke protector/Toe clips and straps/Suede handlebar tape/Allen Key wrench	Front, rear and side reflectors/Cloth handlebar tape/Plastic spoke protector/Toe clips and straps/Bottle cage and Allen key wrench	Front, rear and side reflectors/Cloth handlebar tape/Plastic spoke protector/Stainless chainstay protector	Front, rear and side reflectors/Comfort grips/Spoke protector/Alloy kickstand/Chainguard	Front, rear and side reflectors/comfort grips/spoke protector/Alloy kickstand/Chainguard	Front, Rear and side reflectors/Chaincase/Cloth handlebar tape
Color	Imperial Red	Pearl White	Midnight Black/Deep Magenta/Chrome (20" & 28" --not available in chrome)	Electric Blue/Gunmetal Grey	Midnight Black/Wine Red Astro Silver	Midnight Black

Specifications

Model Number	Villager III V-617 VL-617 V-619 VL-619 V-621 VL-622 V-623 V-625	Sport 500 SF-617 SFL-617 SF-619 SFL-619 SF-621 SF-623 SF-625	Tourist 10 T-611 T-613 T-615 TL-619 TL-612	Tourist 5 T-651 T-653 TL-657 TL-659 TL-652	Tourist 3 T-639 T-631 T-633 TL-637 TL-639	All-Terrain Bike MB-620 MB-622 MB-624	City Bike CB-620 CB-622	Motocross MX-750
Frame Size (inches)	V-617---17.5" V-619---19" V-621---21" V-623---23" V-625---25" VL-617---17.5" VL-619---19" VL-622---22" Angle 72° × 72° 71° × 72° (17.5") 73° × 73° (25")	SF-617---17.5" SF-619---19" SF-621---21" SF-623---23" SF-625---25" SFL-617---17.5" SFL-619---19" Angle 73° × 73° 72° × 72° (19") 71° × 72° (17.5")	T-611---21" T-613---23" T-615---25" TL-619---19" TL-612---22" Angle 72° × 72° 73° × 73° (25")	T-651---21" T-653---23" TL-657---17.5" TL-659---19" TL-652---22" Angle 72° × 72° 71° × 72° (17.5")	T-639---19" T-631---21" T-633---23" TL-637---17.5" TL-639---19" Angle 72° × 72° 71° × 72° (17.5")	MB-620---20" MB-622---22" MB-624---24" Angle 68° × 70° 67°30' × 70° (20")	CB-620---20" CB-622---22" Angle 72° × 72°	MX-750---12" Angle 72° × 70°
Frame	High-tensile 1020 tubes	High-tensile 1020 tubes with pin stripe	High-tensile 1020 tubes	High-tensile 1020 tubes	High-tensile 1020 tubes	Cr-Mo main tubes, Forged fork ends	Cr-Mo main tubes	Mild steel tubes
Fork	High-tensile 1020 tubes	High-tensile 1020 tubes	High-tensile 1020 tubes	High-tensile 1020 tubes	High-tensile 1020 tubes	High-tensile 1020 tubes	High-tensile 1020 tubes	High-tensile 1020 tubes
Handlebar	Steel Maes	Steel Maes	Steel North Road	Steel North Road	Steel North Road	SR MTB-100	Kusuki MTB type	Kusuki Steel
Stem	Alloy stem with Allen key head bolt	Alloy stem with Allen key head bolt	Alloy stem with Allen key head bolt	Alloy stem with Allen key head bolt	Alloy stem with Allen key head bolt	SR MTS-100	Kusuki MT100	Kusuki Steel
Saddle	Black vinyl leatherette	Black vinyl leatherette	Black vinyl leatherette, mattress	Black vinyl leatherette, mattress	Black vinyl leatherette, mattress	Kashimax Black vinyl leatherette anatomically styled W/Alloy seat post	Kashimax Black vinyl leatherette with SR CT-P5 seat post	Ariake, plastic saddle aero style
Crankset	39/52T steel with F.F. system	40/52T alloy crank arms	39/52T steel with F.F. system	46T steel with F.F. system	48T steel	Shimano Tourney XT 26/36/46T	Shimano FC-T500 34/42/50T	Sugino, 44T one piece crank
Freewheel	14-28T with F. F. system, 5-speed	14-28T, 5-speed	14-28T with F.F. system, 5-speed	14-28T with F.F. system, 5-speed	—	Shimano UG black 5 speed, 14-28T	Shimano UG black 5 speed, 14-32T	—
Chain	1/2" × 3/32" × 114 links Uniglide	1/2" × 3/32" × 114 links	1/2" × 3/32" × 114 links, Uniglide	1/2" × 3/32" × 110 links, Uniglide	HKK 1/2" × 1/8" × 104 links	Shimano UG black, 1/2" × 3/32" × 114 links	Shimano UG black 1/2" × 3/32" × 118 links	1/2" × 1/8" × 90 links
Hubs	Front ... Steel small flange Rear ... Steel small flange	Front ... Steel small flange Rear ... Steel small flange	Front ... Steel small flange Rear ... Steel small flange	Front ... Steel small flange Rear ... Steel small flange	Front ... Steel small flange Rear ... 3 speed coaster brake hub with 19T sprocket	Shimano forged alloy small flange with Cr-Mo hub axle	Shimano forged alloy small flange	Front ... Steel, small flange Rear ... Coaster brake with 14T sprocket
Rear Derailleur	Shimano Positron II	Shimano SKY LARK	Shimano 400 FF	Shimano 400 FF	—	Shimano AL 11	Shimano Z503 GS	—
Front Derailleur	Shimano FD-AX50	Shimano FE	Shimano FD-AX50	—	—	Shimano AL 11	Shimano Z204 GS	—
Shifting Lever	Stem mounted with P.P.S. shifting Lever	Stem mounted	Shimano thumb shifter	Shimano thumb shifter	Shimano Trigger lever	Shimano MT 50	Shimano MT 50	—
Brakes	Dia-Compe alloy center-pull with hooded and extension levers	Dia-Compe alloy side-pull with hooded and extension levers	Dia-Compe alloy side-pull	Dia-Compe alloy side-pull	Dia-Compe alloy side-pull (Front only)	Dia-Compe No. 981 cantilever brake with DC-280 MTB levers	Dia-Compe No.981 cantilever brake with DC-281 MTB levers	Front ... Steel side-pull Rear ... Coaster brake
Rims	Araya 27" × 1 1/4"	27" × 1 1/4"	27" × 1 1/4"	27" × 1 1/4"	27" × 1 1/4"	26" × 1.75", alloy	26" × 1.5" alloy	20" × 1.75"
Tires	Panasonic 27" × 1 1/4" Gumwall crackproof 90 PSI	Panasonic 27" × 1 1/4" Gumwall crackproof 90 PSI	Panasonic 27" × 1 1/4" Gumwall crackproof 75 PSI	Panasonic 27" × 1 1/4" Gumwall crackproof 75 PSI	Panasonic 27" × 1 1/4" Gumwall crackproof 75 PSI	26" × 1.75" skin-side	26" × 1.5"	Knarler Knobby 20" × 2.125" open side
Spokes	14G U-C-P finished	14G U-C-P finished	14G U-C-P finished	14G U-C-P finished	14G U-C-P finished	14G U-C-P finished	14G U-C-P finished	12G U-C-P finished
Pedale	KKT RT-E with reflectors	KKT RT-E II with reflectors	KKT RM3 full rubber with reflectors	KKT RM3 full rubber with reflectors	KKT RM3 full rubber with reflectors	KKT SMX black with reflectors	MKS PB20 black with reflectors	KKT RT-E with Cr-Mo axle and reflector
Accessories	Front, rear and side reflectors/Comfort grips/Spoke protector/Alloy Kickstand/Inner and outer chainguard	Front, rear and side reflectors/Comfort grips/Spoke protector/Alloy kickstand/chainguard	Front, rear and side reflectors/Spoke protector/Mudguard with pin stripe/Alloy kickstand/Inner and outer chainguard /Handlebar grips	Front, rear and side reflectors/Spoke protector/Mudguard with pin stripe/Alloy kickstand/Inner and outer chainguard /Handlebar grips	Front, rear and side reflectors/Mudguard with pin stripe/Alloy kicks-tand/Chaincase/Handlebar grips	Front, rear and side reflectors/Spoke protector/Handlebar grips/Q.R. Seat binder bolt set	Front, rear and side reflectors/Spoke protector/Handlebar grips	Front, rear and side reflectors/Hockey stick type chain guard/Handlebar grips
Color	Cobalt Blue/Royal Red	Electric Blue/Quick Silver	Wine Red	Electric Blue	Gunmetal Grey	Electric Blue	Imperial Red	Midnight Black

Proper Bicycle Fit

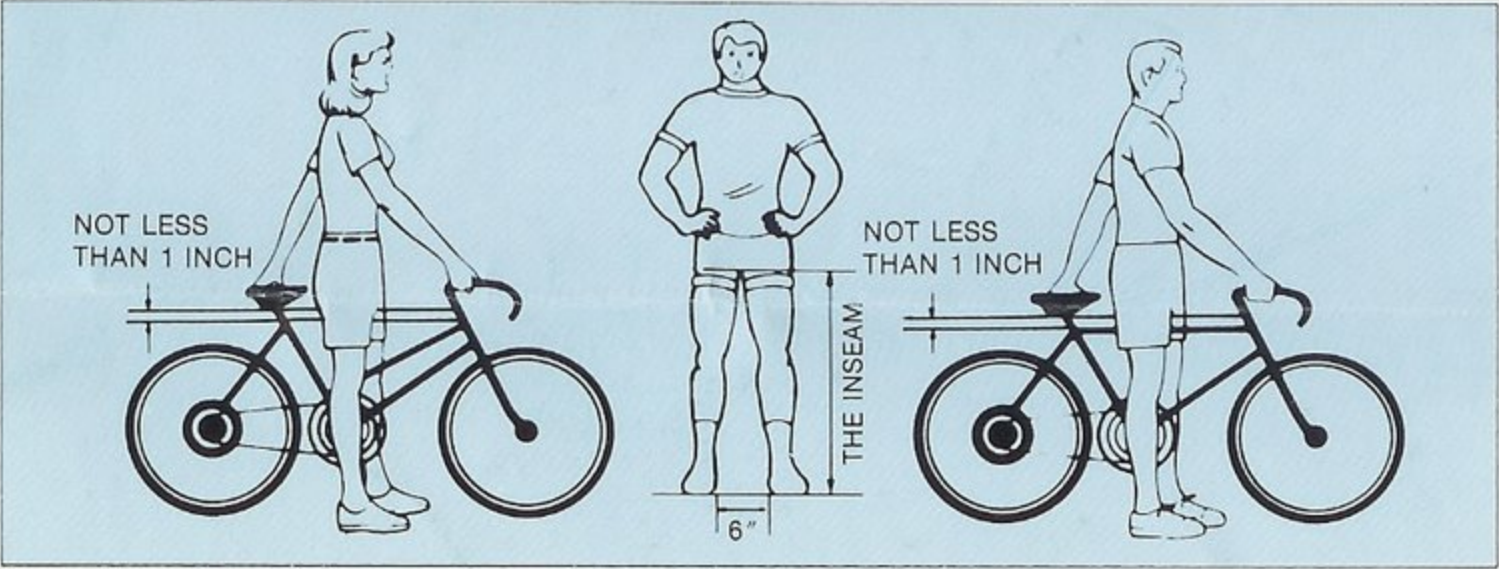

Proper fit is an important factor in assuring bicycle safety and handling. Panasonic bicycles come in a variety of frame sizes, to ensure that there's one just right for you. Frame size is determined by choosing the largest frame which can be straddled with at least one inch of clearance above the top tube, keeping both feet on the ground, as illustrated, right. Women can use the men's style frame to determine the approximate size of the corresponding ladies' model, as illustrated, left.

PROPER PANASONIC BICYCLE FOR VARIOUS INSEAMS

FRAME SIZE	17.5"	19"	20"	21"	22"	23"	24"	25"	26"	27"	28"
THE MINIMUM INSEAM OF RIDER	28"	29.5"	30.5"	31.5"	32.5"	33.5"	34.5"	35.5"	36.5"	37.5"	38.5"

Bicycle Accessories



Front Freewheeling System
Providing fast, positive shifting without the need for pedaling.



Positive Pre-Select System
A gear may be accurately "Pre-Selected" at any time, even before mounting the bicycles.

LIMITED WARRANTY
Panasonic BICYCLE

PANASONIC COMPANY, "PHI" or "PSC" will repair and exchange parts for this bicycle free of charge in the U.S.A. or Puerto Rico in the event of a manufacturing defect, as follows:

- Parts**
New parts in exchange for defective parts for one (1) year after original purchase.
- Fork and Frame**
New fork and frame for the life of the bicycle.
Exception: Fork and Frame (Only for Motocross Bicycle), New fork and Frame for one (1) years after original purchase.
- Labor — Thirty Day Check-Up**
Repair of defects in material, workmanship or assembly for thirty (30) days after original purchase.
- Service**
Labor and parts can be obtained during the thirty (30) day labor warranty period by bringing your bicycle to the Panasonic bicycle dealer from whom the bicycle was purchased.
- Parts Exchange**
After the thirty (30) day labor warranty period is over, any defective part can be exchanged under the parts warranty by bringing it to any Panasonic bicycle dealer. Labor for removal and installation is available at your expense.
A purchase receipt or other proof of date of original consumer purchase will be required before warranty performance is rendered.
This warranty covers normal consumer use and does not cover failure which results from alteration, accident, misuse, abuse, neglect, improper assembly, maintenance, or commercial use.
This warranty gives you specific legal rights and you may also have other rights which vary from state to state.
If a problem with this Panasonic bicycle develops during the warranty period, first contact your Panasonic dealer. If the problem is not handled to your satisfaction, then write to the Panasonic Consumer Affairs Division at the company address.

Panasonic Company,
Division of Matsushita Electric
Corporation of America
Bicycle Sales Department

One Panasonic Way,
Secaucus, New Jersey 07094
(201) 348-5375, 5376
5377, 5378

425 E. Algonquin Rd.
Arlington Heights, IL 60005
(312) 364-7900

14401 E. 33rd Place
Aurora, CO. 80010
(303) 371-3080

6550 Katella Avenue,
Cypress, CALIF. 90630
(714) 895-7200

Panasonic Hawaii, Inc. ("PHI")
91-238 Kauhi Street,
Ewa Beach, Hawaii 96706
(808) 682-2851

Panasonic Sales Co.,
("PSC"), P.O. box. 2036,
Ceramic Annex, Carolina
Puerto Rico 00630

Panasonic Bicycle Factory



HAND BRAZING PROCESS



AUTOMATIC FRAME BRAZING MACHINE




PAINTING PROCESS



ASSEMBLING LINE




DURABILITY TESTING MACHINE

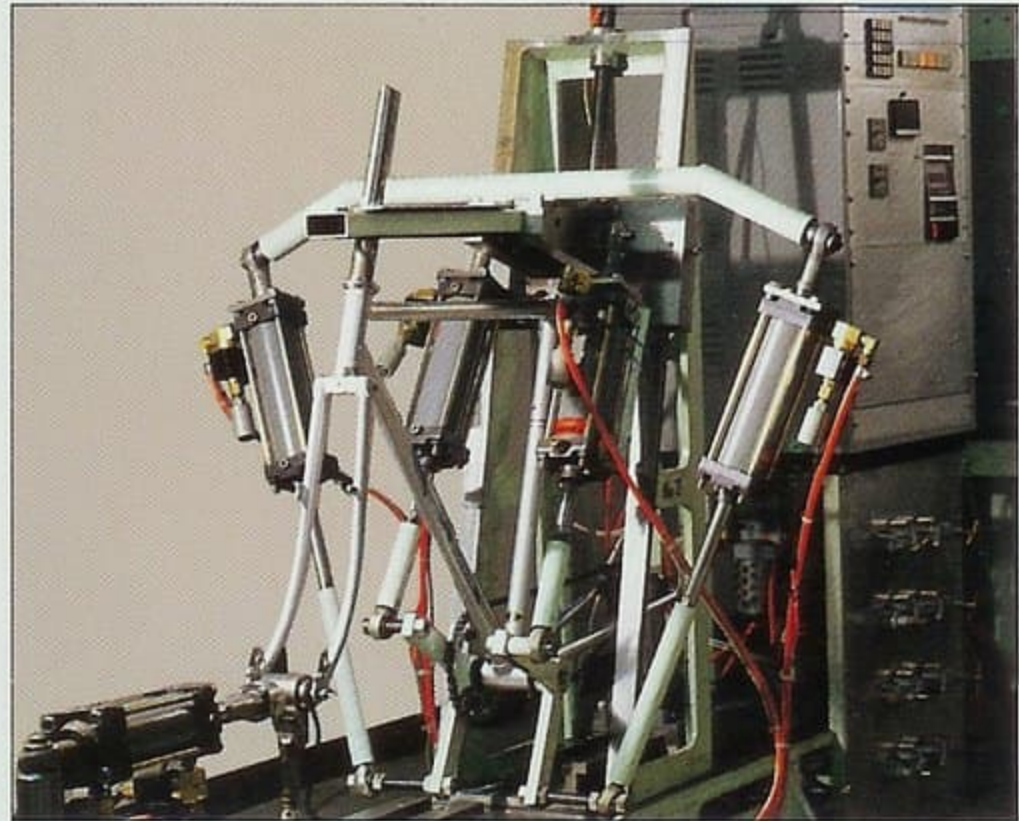

FATIGUE TESTING MACHINE

Proper Bicycle Fit

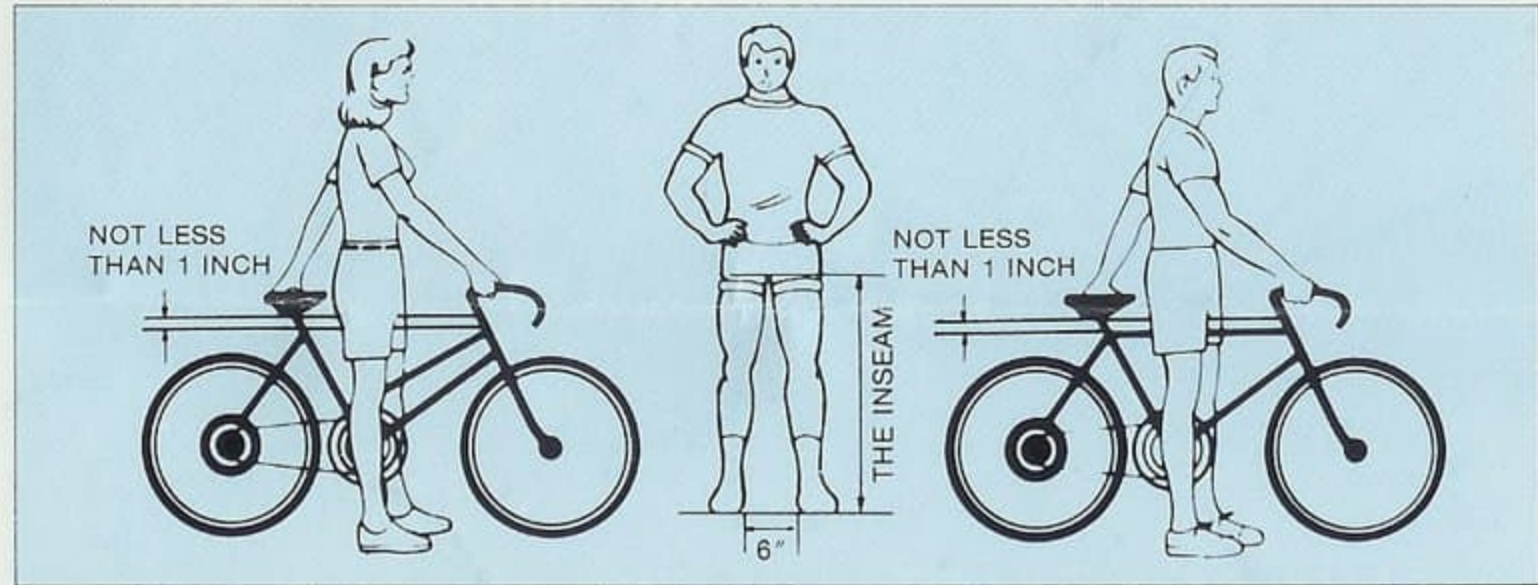

Proper fit is an important factor in assuring bicycle safety and handling. Panasonic bicycles come in a variety of frame sizes, to ensure that there's one just right for you. Frame size is determined by choosing the largest frame which can be straddled with at least one inch of clearance above the top tube, keeping both feet on the ground, as illustrated, right. Women can use the men's style frame to determine the approximate size of the corresponding ladies' model, as illustrated, left.

Bicycle Accessories

