


R O C K Y M O U N T A I N

B
I
C
Y
C
L
E
S



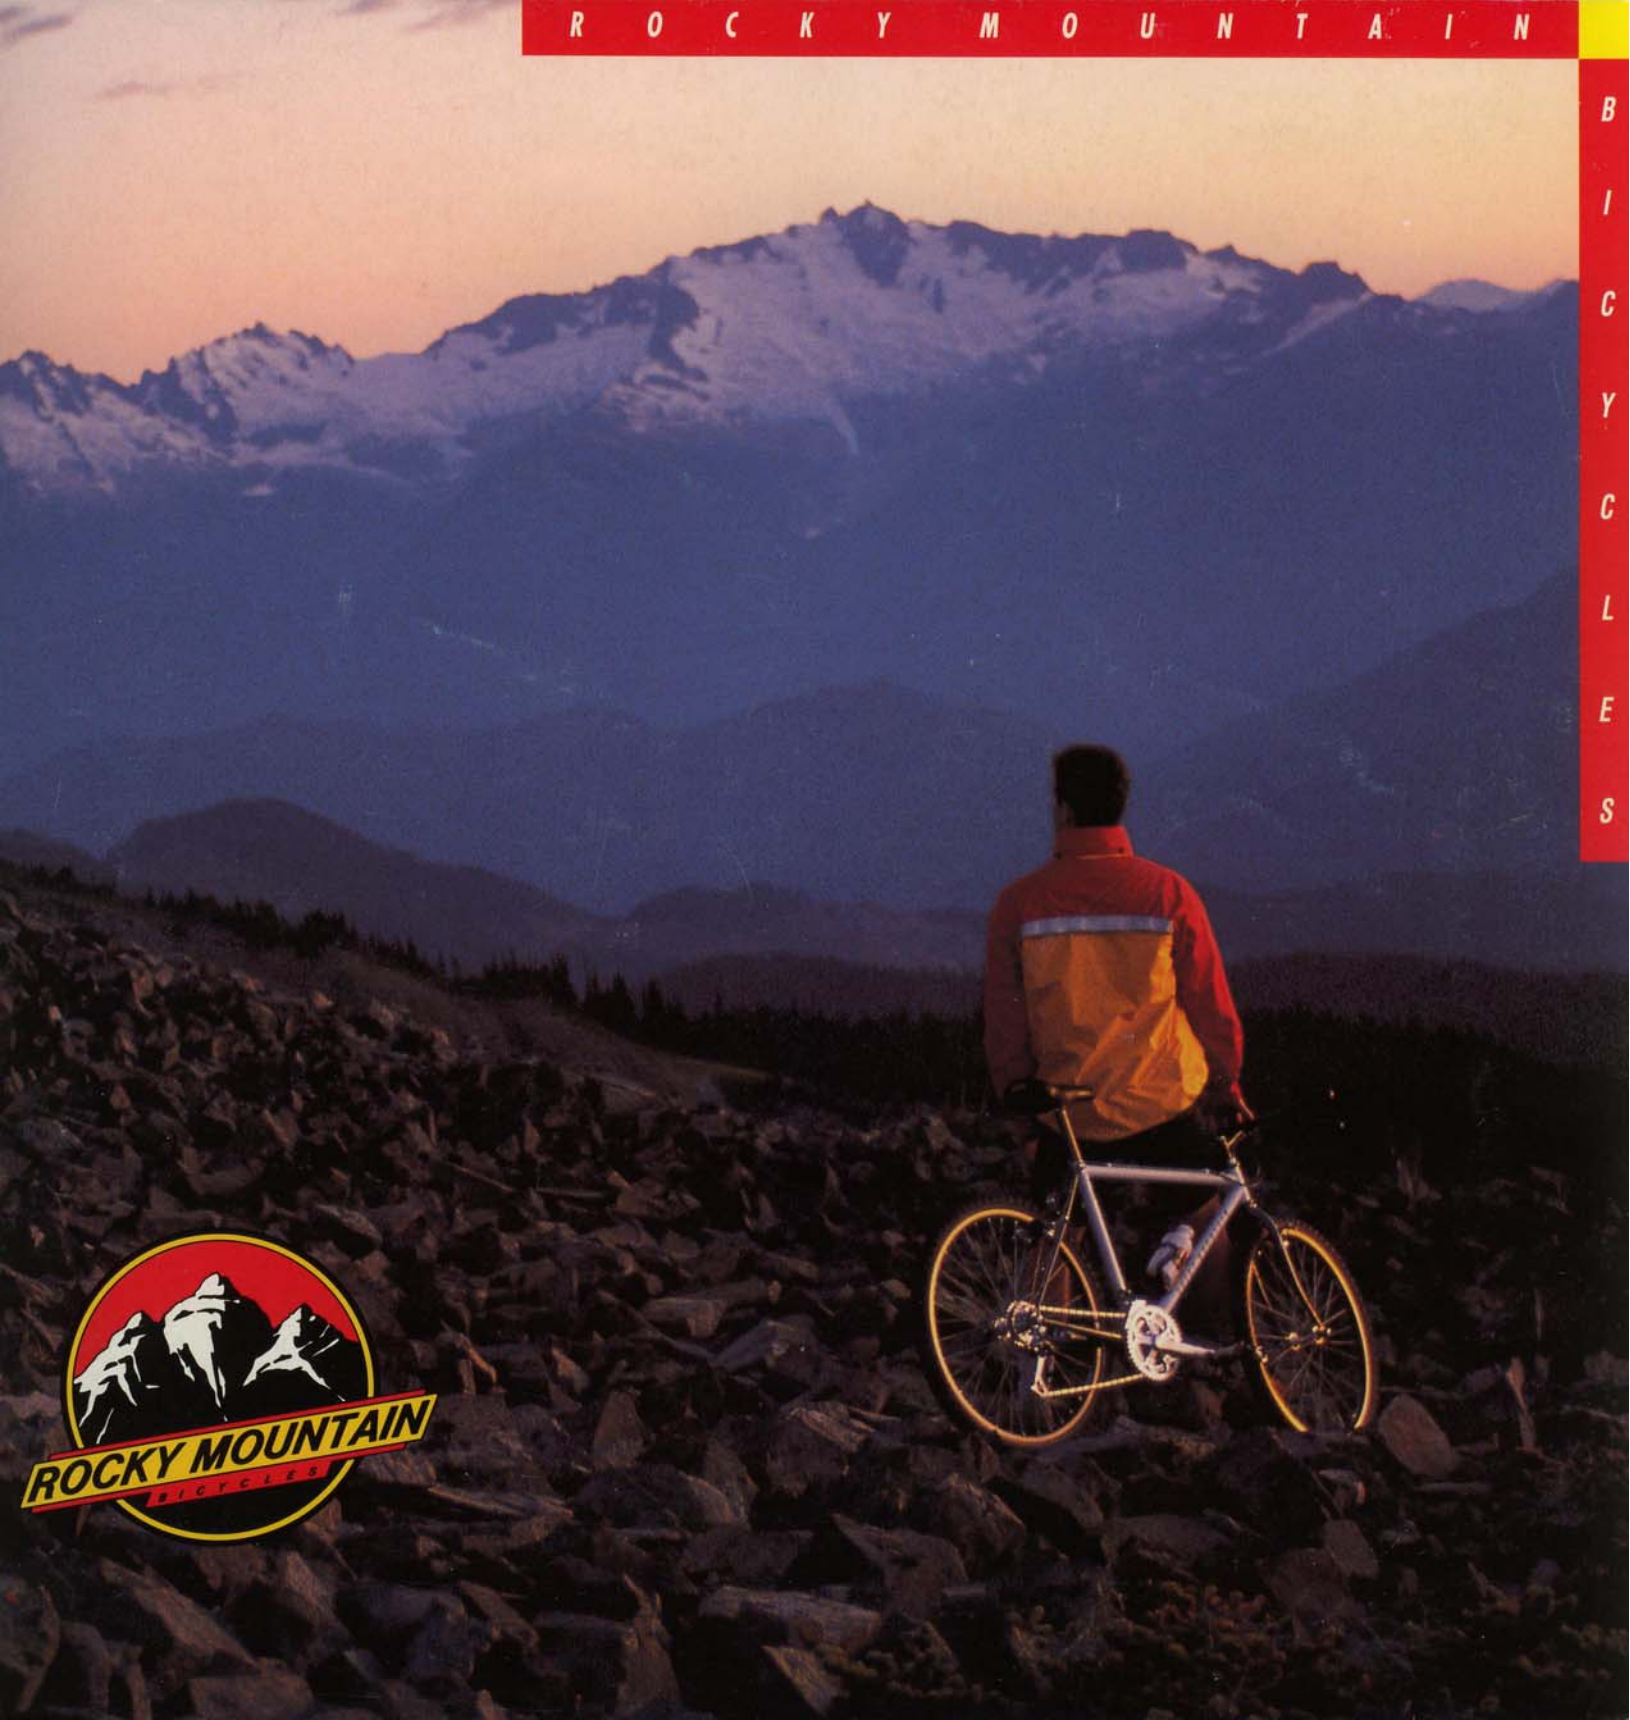

IN THE PAST... Back in the early Seventies, a small bicycle store owned by Grayson Bain gathered a group of visionary cyclists to design and construct a unique vehicle. Built for the hills and rough roads of Canada's west coast, these modified 10-speeds had flat handlebars, thumbshifters, wide gearing and wider tires. This stable, strong climber was known as the "Sherpa", and became Rocky Mountain's first bicycle.

Meanwhile, across the border in California, a master builder was using the technique of lugless brazing to create a new bike he called the "Mountain Bike". While Canadian cyclists enthusiastically rode these bicycles, they realized that the rugged Canadian terrain called for custom frame and component modifications. The Rocky Mountain Bicycle evolved from a perfect blend of U.S. and Canadian innovative developments.

Exceptional quality, it was determined, would be the fundamental commitment of the Rocky Mountain Bicycle Company. The "no-compromise" Canadian control and involvement in the manufacture of each individual Rocky Mountain bicycle achieves this goal.

IN THE PRESENT... The Rocky Mountain Bicycle Company continues as a strongly committed team whose extensive cycling experience is utilized in the design and manufacture of superior bicycles. Beyond the quality of each bicycle, truth and respect for all people is the basic objective that resounds throughout the company. It is our responsibility to provide to each customer a quality of service fitting the distinctive nature of our bikes. Commitment and quality unites the people and product of Rocky Mountain with discriminating customers throughout North America and Europe.

THE ROCKY MOUNTAIN PRO TEAM... The All-Canadian Rocky Mountain Team has ridden hard to test and improve 1989 models for 1990. Some of Canada's best: Cindy Devine, Guido and Georges Visser, Paul Chetwynd, and Bernie Lafleur rode their chosen Rocky Mountain bike to fulfill their personal goals of success. Based in Vancouver and Quebec City, the teams gave the TEAM TANTALUS, STRATOS and the BLIZZARD their stamp of approval with their most successful season ever.



**HANDBUILT FRAME PRODUCTION
IN THE ORIGINAL CRAMPED QUARTERS.
NO ASSEMBLY LINES OR ROBOTS IN SIGHT!**

The years of development in designing and building superior bicycles did not begin with sophisticated marketing concepts, but with hard riding. Nine years ago, Grayson and his staff began developing these bikes by riding the trails and roads of Canada's west coast. Nothing much has changed. Every design is tested, every bike is ridden, improved and ridden again by selected Rocky Mountain team riders across Canada

DESCENT AT SPEED.

RICHARD KELLY FLIES DOWN

WHISTLER MOUNTAIN, B.C.

ON HIS TANTALUS.



until we are confident it has the integrity to carry the Rocky Mountain name. All rider feedback is assessed in the analysis of what works and what does not. The Pro Team is especially helpful, as new frame and component designs either make it or break it at this level of competition.

TEAM TANTALUS ... TIG welded by Chris Deckerf. Drawing from seven years of experience in manufacturing performance mountain bikes, Rocky Mountain proudly presents the 1990 TEAM TANTALUS. The Tantalus mountain range is surrounded by some of the toughest mountain bike terrain in North America.

And a second bike, the TITANIUM COMPETITION enters Year 2 of production. The TITANIUM relies on over a decade of racing and

building experience with state-of-the-art technology. The TITANIUM frameset uses the ultimate 3/2.5 grade materials, resulting in an incredibly light 23 pound race bike with the responsiveness and durability that only precision-crafted titanium alloy affords.

The 1990 TEAM TANTALUS or TITANIUM COMPETITION will perform exceptionally well for any competitor ... including the Rocky Mountain Pro Team.

SPECIFICATIONS

TITANIUM	(DIMENSIONS IN INCHES)									
SIZE (CENTRE TO TOP)	17.0	18.5	20.0	21.5	23.0					
TEAM TANTALUS 2										
SIZE (CENTRE TO TOP)	16.0	17.0	18.0	19.0	20.0	21.0	22.0	23.0		
HEAD ANGLE	71.0	71.0	71.0	71.0	71.0	71.0	71.0	71.0	71.0	
SEAT ANGLE	73.0	73.0	72.5	72.5	72.5	72.0	72.5	72.0	71.5	
TOP TUBE	21.5	22.0	22.5	22.7	23.0	23.2	23.6	23.7	24.2	24.7
CHAIN STAY	16.7	16.7	16.7	16.7	16.7	16.7	16.7	16.7	16.9	16.9
B/B HEIGHT	11.5	11.5	11.5	11.5	11.5	11.5	11.5	11.5	11.5	11.5
	TITANIUM 1					TEAM TANTALUS 2				
FRAME	3A1/2.5V					TANGE PRESTIGE, STD, O/S CONCEPT OR RITCHEY LOGIC				
FEATURES	SEMI-SLOPE TOP TUBE REVERSE SEAT COLLAR WISHBONE SEAT STAY					SAME DESIGN FRAME				
FORK	SYNCROS TITANIUM OR CRO-MO					SYNCROS CRO-MO OR ROCKY MTN. PRESTIGE				
FEATURES	ALUM. #7000 MACHINED CROWN AND DROP-OUTS, COVALENT BONDING					(SAME DESIGN) OR CUSTOM BY ROCKY MOUNTAIN				
HANDLEBAR	SYNCROS ALUM. HEAT TREATED					SYNCROS OR TANGE PRESTIGE				
STEM	SYNCROS ALUM. HEAT TREATED					SYNCROS OR RMB CUSTOM				
SEAT POST	SYNCROS ALUM. 27.0 X 335					SYNCROS OR SHIMANO DEORE XT 27.0 X 330				
SADDLE	SELLE ITALIA TURBO					SELLE ITALIA TURBO				
HEADSET	SHIMANO DEORE XT; DIA. 1-1/8"					SHIMANO DEORE XT; DIA. 1-1/8" OR 1"				
PEDALS, CHAIN	SHIMANO DEORE XT									
B/B & CRANKSET	SHIMANO 24-36-46 "SG".....					OR OTHER RING COMBINATIONS				
DERAILLEURS	SHIMANO DEORE XT "STI".....					LONG OR SHORT CAGE RR				
BRAKES	SHIMANO DEORE XT CANTI.....					2 FINGER LEVERS OR MAGURA HYDRAULICS				
HUBS, SPOKES	SHIMANO DEORE XT 12-28 COGS DT S.S.					WITH DT SPOKE 14-15-14G WITH ALLOY NIPPLE				
RIMS	WOLBER AT18 32H, BLACK, HARD ANODIZED.....					ALL WHEELS WHEELTECH HANDBUILT				
TIRES	RITCHEY MEGABITE "OVERDRIVE".....					OR KEVLAR BEAD(OR HARDRIVE 26 X 2.1)				
COLOUR	POLISHED TITANIUM					ANY RMB DUPONT, IMRON OR NEON				
	1 COMPONENT SPECIFICATIONS CAN BE CUSTOMIZED TO SUIT RIDER					2 FRAME AND COMPONENT SPECIFICATIONS CAN BE CUSTOMIZED TO SUIT RIDER				

HAND BUILT BY
Derek Bailey

HAND BUILT BY
Chris Deckerf




FRAME OF THE BICYCLE . . . The Bicycle Frame constitutes the largest and heaviest part of the bicycle, therefore it is the component viewed most critically by knowledgeable cyclists. The Cro-Moly steel tubing in Rocky Mountain's

bicycles is Tange. The over-stiff "Oversize" tubing adds at least 1/4 of a pound (111 grams) to the frame weight, so instead we use a blend of special diameter Tange tubes to produce a frame that's stiff in acceleration, yet stable on descents. Our Aluminum and Titanium frames follow the same principles.

Lance Bohlen, Rocky Mountain's chief frame designer, in cooperation with several top universities, is now using scientific lab testing and computer modelling to evaluate various frame materials. By combining the experience of mountain bike building and the technical knowledge of specialists, Rocky Mountain frames continue to provide racers everything they demand.

One area of advancement is our move from the standard road bike Steerer Column - (the threaded section of the fork that passes through the head tube of the frame) - to the 1-1/8" size. For years Rocky Mountain has been building forks with strength advantages in the blades and dropouts, while continuing to use the same

**EVOLUTION OF THE 1990 CIRRUS
FRAME: FINAL DRAWING AND
SAMPLE, PRODUCED - APRIL 1989**

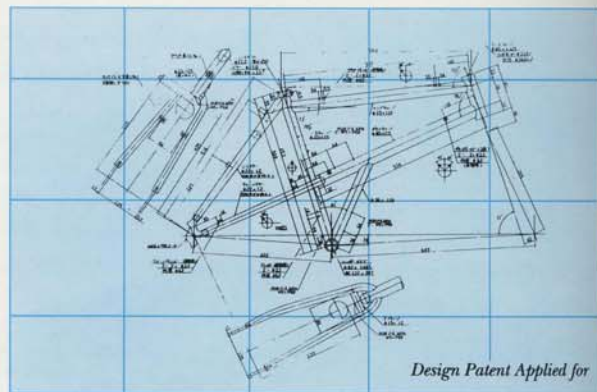

steerer size. This steerer and accompanying head tube is perfectly suited to road bikes. But over the years, on rutted roads or mountain trails, the 1" road size steerers can cause bending, or even frame and fork breakage on mountain bikes, hence the move to a larger diameter, more durable component. The extra 1/8" diameter of Headset, Head tube and Steerer significantly increases the strength and adds only slightly to the weight. All Rocky Mountain bikes come with the new 1-1/8" head tube components.

In early 1989 we started developing prototypes of Advanced Frame Designs which would remove the problems associated with: Standard Chainstay Placement (with the chain grabbing between the stay and chainstays); Short Chainstays (chain ring clearance and tire clearance difficulties); Bottom Bracket Axle Width (chain line problems). The result is Advanced Design. Advanced Design you can see on the WEDGE, SUMMIT or CIRRUS.

COMPONENTS OF THE BICYCLE . . . More than a simple collection of parts, a fine bicycle is a balanced combination of chosen components that results in superior ride characteristics. Rocky Mountain designs and selects the best suited components for each bicycle model. Component development focuses on Wheeltech, Ritchey, Syncros and, of course, Shimano.

Shimano has again edged out all component manufacturers with STI "Shimano Total Integration". The two BEST STI component groups are used on all Rocky Mountain bikes!


In the meantime, our favorite Canadian component maker, Syncros, is hot for 1990! As well as the Propost seatposts; the Steerhorn, Shotgun and Cattleprod handlebar/stem system, the Syncros ranch is adding the new Powerlite Composite fork. The Syncros equipment is standard on the BLIZZARD, CIRRUS and SUMMIT.

Tom Ritchey is a valuable ally of Rocky Mountain, and is a major influence in most international component designs. Since 1984, Rocky Mountain's bicycles have been equipped exclusively with Ritchey tires.

Wheeltech wheels are mounted on every Rocky Mountain bicycle.

We use only DT Swiss spokes with Wolber rims. Wheel durability is demanded by our riders, so each Wheeltech® wheel is hand-stressed and trued.

**NORBA DOWNHILL AND DUAL
SLALOM CHAMPION CINDY DEVINE
SHOWING WINNING FORM ON HER
ROCKY MOUNTAIN STRATOS.**

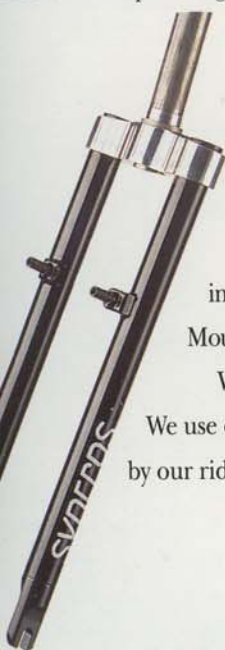



LANCE'S WEDGE

THE WEDGE... ADVANCE DESIGN

Those serious about their cycling pursuits know the performance of Rocky Mountain bicycles encompasses the latest design function, the finest builder's quality, and the most innovative component selection. Named "one of the 7 Ferarri's" by the German magazine "Bike" (Feb/89), the WEDGE is the absolute best of Rocky Mountain bicycles.

THUNDERBOLT... RADICAL SLOPES

From start to finish it takes around 18 hours and one master craftsman to turn a rider's dream into a THUNDERBOLT. During each hour of production, Rocky Mountain's commitment to quality is the rule rather than the isolated exception.

DISCOVERY... URBAN/EXPEDITION

The Rocky Mountain SHERPA of 1974 has been reborn! The DISCOVERY is handbuilt for the cyclist who wants the perfect blend of tough urban performance, or the stability off-road for a 1500 mile expedition.

S P E C I F I C A T I O N S

WEDGE		(DIMENSIONS IN INCHES)						
SIZE (CENTRE TO TOP)		17.0	18.0	19.0	20.0	21.0	22.0	23.0
THUNDERBOLT								
SIZE (CENTRE TO TOP)		16.0	17.0	18.0	19.0	20.0	21.0	22.0
HEAD ANGLE		71.0	71.0	71.0	71.0	71.0	71.0	71.0
SEAT ANGLE		73.0	73.0	72.5	72.0	72.0	72.0	71.5
TOP TUBE		21.5	22.0	22.5	23.0	23.5	23.9	24.2
CHAIN STAY		16.7	16.7	16.7	16.7	16.7	16.7	16.7
B/B HEIGHT		11.5	11.5	11.5	11.5	11.5	11.5	11.5
DISCOVERY	SIZE (CENTRE TO TOP) 18.5" - 23" (SEE SPECS. FOR METRO FRAME)							
	WEDGE	THUNDERBOLT			DISCOVERY			
FRAME	TANGE PRESTIGE; CUSTOM TUBE SELECTION	TANGE PRESTIGE; STD. O/S OR CONCEPT; OR RITCHIE LOGIC			TANGE PRESTIGE; STD OR CONCEPT			
FEATURES	TWIN DT. OVERSIZE MIDTUBE, RAISED CHAINSTAYS. FULL CUSTOM TO SUIT RIDER	RADICAL SLOPE T.T. WITH SEAT COLLAR; CUSTOM CABLE ROUTING			RIDER'S CHOICE OF BRAZE-ONS			
FORK	SYNCRS POWERLITE CRO-MO	SYNCRS (SAME) OR ROCKY MTN PRESTIGE BY ROCKY MTN.			ROCKY MTN PRESTIGE UNICROWN			
FEATURES	ALUM. #7000 MACHINED CROWN AND DROPOUTS. COVALENT BONDING.	(SAME) OR CUSTOM BY ROCKY MTN.			CUSTOM RADIUS BLADE WITH WIDE 40C CLEARANCE			
HANDLEBAR	TANGE PRESTIGE	SYNCRS ALUM. OR TANGE PRESTIGE			TANGE PRESTIGE W/STEERHORN			
STEM	ROCKY MTN. CUSTOM	SYNCRS ALUM. OR ROCKY MTN CUSTOM			ROCKY MTN. CUSTOM			
SEAT POST	SHIMANO DEORE XT; 27.0 x 330	SYNCRS ALUM. OR SHIMANO DEORE XT			SHIMANO DEORE XT; 27.0 X 330			
SADDLE	SELLE ITALIA TURBO	SELLE ITALIA TURBO			VELO TURBO			
HEADSET	SHIMANO DEORE XT; DIA. 1-1/8"	SHIMANO DEORE XT; DIA 1 1/8"			TANGE VANTAGE; DIA. 1"			
PEDALS, CHAIN	SHIMANO DEORE XT	SHIMANO DEORE XT			SHIMANO DEORE XT			
B/B & CRANKSET	SHIMANO 24-36-46 "SG".....	OR OTHER RING COMB.			SHIMANO 28-38-48 "SG"			
DERAILLEURS	SHIMANO DEORE "STI".....	WITH LONG OR SHORT CAGE RR.....			(SAME)			
BRAKES	SHIMANO DEORE XT; CANTILEVERS OR MAGURA HYDRAULICS	SHIMANO DEORE XT; CANTI FR, TOP MOUNT "U" BRAKE RR.....			SHIMANO CANTILEVERS 2 OR 4 FINGER LEVERS			
HUBS	SHIMANO DEORE XT, 12-28 COGS.....	(SAME).....			(SAME)			
SPOKES	DT 14-15-14g. WITH ALLOY NIPPLES.....	(SAME)			DT 14g			
RIMS	WOLBER AT18 32H BLK.; HARD ANODIZED.....	(SAME) ALL WHEELS WHEELTECH HANDBUILT			WOLBER GTX 700 x 19; 32H			
TIRES	RITECH 26 x 2.0 WIRE "OVERDRIVE" OR KEVLAR BEAD OR "HARDRIVE" 2.1	(SAME)			B. GORDON ROCK 'N' ROAD 700 X 40 KEVLAR			
COLOUR	ANY RMB DUPONT IMRON OR NEON							
NB:	ANGLES AND SPECIFICATIONS CAN BE CUSTOMIZED TO SUIT RIDER							



GRAYSON'S TURBO LTD.

**TURBO**

Here is the bicycle that is a natural leader, standing out from every other road bike. The Turbo is the committed work of Derek Bailey, a craftsman with 32 years of personal frame building experience. Mr. Bailey builds for the rider who wants the utmost attention to detail, without compromise.

S P E C I F I C A T I O N S**TURBO**

SIZE (CENTRE TO TOP)	46 TO 66cm
HEAD/SEAT TUBE	74 AND 74 OR RIDER'S CHOICE
TOP TUBE	50 TO 62cm OR RIDER'S CHOICE
FRAMESET	TANGE PRESTIGE; SUPER VITUS; REYNOLDS 531C; COLUMBUS SLX, TSX
FEATURES	HENRY JAMES LUGS - SILVER SOLDERED (LTD VERSION) CUSTOM CROWN REINFORCEMENTS (LTD VERSION) CINELLI LUGS (STD VERSION)
HANDLEBAR	CINELLI MOD. 66 (OR PROFILE FOR SPEED TRI BAR/STEM)
STEM	CINELLI XA
TAPE	VINYL VENTED OR CINELLI CORK RIBBON
SADDLE	VELO OR SELLE ITALIA TURBO
POST	SR LAPRADE OR SHIMANO NEW DURA-ACE
GROUP	SHIMANO NEW DURA-ACE (STD OR STI); ULTEGRA; 105 SC
OPTIONS	CHAINRINGS, CRANK LENGTH, PEDALS, COGS
COLOUR	ANY RMB DUPONT IMRON, OR NEON



SUMMIT

One of the Advance Design series of bikes, not bound by traditional frame geometries, and out to solve traditional problems. Chain suck is eliminated without the soft feeling rear triangles and flexy bottom brackets that plague other elevated chainstay designs. A special blend of "Prestige" tubing diameters and gauges maintains strength, resulting in high performance advantages with a mere 0.5 lbs. additional frame weight.

S P E C I F I C A T I O N S

SUMMIT	(DIMENSIONS IN INCHES)			
SIZE (CENTRE TO TOP)	17.0	18.5	20.0	21.5
HEAD ANGLE	71.0	71.0	71.0	71.0
SEAT ANGLE	73.0	72.0	72.0	72.0
TOP TUBE	21.9	22.5	23.1	23.7
CHAINSTAY	16.5	16.8	16.8	16.8
B/B HEIGHT	11.5	11.5	11.5	11.5
FRAME	TANGE PRESTIGE; SPECIAL SELECTION			
FEATURES	DOUBLE MAIN TRIANGLE, TWIN LATERAL DOWN TUBES, ELEVATED WISHBONE CHAIN STAYS, WISHBONE SEAT STAY, REVERSED SEAT COLLAR			
FORK	SYNCROS POWERLITE			
FEATURES	ALUM. #7000 MACHINED CROWN AND DROPOUTS; COVALENT BOND TO CRO-MO BLADES			
HANDLEBAR	SYNCROS ALUM. #7000; ODI "ATTACK" GRIPS			
STEM	SYNCROS #6061 ALUM. HEAT TREATED			
SEAT POST	SYNCROS #7000 ALUM.; 27.0 X 335			
SADDLE	VELO TURBO LEATHER			
HEADSET	SHIMANO DEORE XT; DIA. 1-1/8"			
CHAIN, B/B AND CRANKSET	SHIMANO DEORE XT 24-36-46 "SG" ROUND RINGS			
PEDALS	SHIMANO DEORE XT COMP. WITH CLIPS AND STRAPS			
DERAILLEURS	SHIMANO DEORE XT "STI", SHORT CAGE RR			
BRAKES	SHIMANO DEORE XT, CANTILEVERS "SLR"			
WHEELS	HANDBUILT BY WHEELTECH			
HUBS	SHIMANO DEORE XT; 12-28" "HG" COGS			
SPOKES	DT COMPETITION 14-15-14g WITH ALLOY NIPPLES			
RIMS	WOLBER AT18 32H; HEAT TREATED; HARD ANODIZED; BLACK			
TIRES	RITCHEY MEGABITE "OVERDRIVE" 26 X 2.0			
COLOUR	PEARL WHITE/BRIGHT RED			


BLIZZARD

Now in its fourth year, the BLIZZARD continues to dominate in its class. The appeal of the radical sloping top tube with the TIG welded Prestige tubing is well recognized.

"The sloping top tube design tightens the frame up on both front and rear triangles". (Mountain & City Biking).

S P E C I F I C A T I O N S

BLIZZARD		(DIMENSIONS IN INCHES)			
SIZE (CENTRE TO TOP)	17.0	18.5	20.0	21.5	
HEAD ANGLE	70.5	70.5	70.5	70.5	
SEAT ANGLE	72.5	72.5	72.5	72.5	
TOP TUBE	22.0	22.6	23.1	23.6	
CHAINSTAY	16.8	16.8	16.8	16.8	
B/B HEIGHT	11.5	11.5	11.5	11.5	
FRAME	TANGE PRESTIGE, QUAD BUTTED/ DOUBLE BUTTED				
FEATURES	RADICAL SLOPE TOP TUBE, CUSTOM SEAT COLLAR AND CABLE ROUTING, WISHBONE CRO-MOLY SEAT STAY				
FORK	SYNCRS POWERLITE				
FEATURES	ALUM. #7000 MACHINED CROWN AND DROPOUTS; COVALENT BOND TO CRO-MO BLADES				
HANDLEBAR	TANGE PRESTIGE; ODI "ATTACK" GRIPS				
STEM	ROCKY MOUNTAIN CRO-MO				
SEAT POST	KALLOY HEAT TREATED CRO-MO; 27.0 x 300				
SADDLE	VELO TURBO LEATHER				
HEADSET	SHIMANO DEORE DX; DIA. 1-1/8"				
CHAIN, B/B AND CRANKSET	SHIMANO DEORE XT 24-36-46 "SG" ROUND RINGS				
PEDALS	SHIMANO DEORE XT COMP. WITH CLIPS AND STRAPS				
DERAILLEURS	SHIMANO DEORE XT "STI"; SHORT CAGE RR.				
BRAKES	SHIMANO DEORE XT; CANTI. FR, U-2 RR ON SEAT STAY; "SLR" CUSTOM CABLE ROUTING				
WHEELS	HANDBUILT BY WHEELTECH				
HUBS	SHIMANO DEORE XT; 12-28" "HG" COGS				
SPOKES	DT COMPETITION 14-15-14g. WITH ALLOY NIPPLES				
RIMS	WOLBER AT18 32H; HEAT TREATED; HARD ANODIZED; BLACK				
TIRES	RITCHEY MEGABITE "HARDDRIVE" 26 X 2.1				
COLOUR	WHITE/JET BLACK				



CIRRUS

The CIRRUS is possibly the world's first aluminum mountain frame with a sloping top tube and raised chainstays. The rider understands the trail ahead is a challenge to be met. The CIRRUS is specifically bred to perform on the most technical of trails, through each switchback, down every descent.

S P E C I F I C A T I O N S

CIRRUS		(DIMENSIONS IN INCHES)			
SIZE (CENTRE TO TOP)	17.0	18.5	20.0	21.5	
HEAD ANGLE	71.0	71.0	71.0	71.0	
SEAT ANGLE	73.0	73.0	73.0	73.0	
TOP TUBE	21.9	22.8	23.2	23.8	
CHAINSTAY	16.6	16.6	16.6	16.6	
B/B HEIGHT	11.5	11.75	11.75	11.75	
FRAME	ALUMINUM #7000 SERIES				
FEATURES	ELEVATED WISHBONE CHAIN STAY, SLOPING TOP TUBE, WISHBONE SEAT STAY, REVERSE SEAT COLLAR				
FORK	SYNCROS POWERLITE				
FEATURES	ALUMINUM. #7000 MACHINED CROWN AND DROPOUTS; COVALENT BOND TO CRO-MO BLADES				
HANDLEBAR	SYNCROS ALUMINUM #7000; ODI "ATTACK" GRIPS				
STEM	SYNCROS ALUMINUM #6061 HEAT TREATED				
SEAT POST	SYNCROS ALUMINUM #7000; 27.0 X 335				
SADDLE	VELO TURBO LEATHER				
HEADSET	SHIMANO DEORE XT; DIA. 1-1/8"				
CHAIN, B/B AND CRANKSET	SHIMANO DEORE XT, 24-36-46 "SG" ROUND RINGS				
PEDALS	SHIMANO DEORE XT COMP, WITH CLIPS AND STRAPS				
DERAILLEURS	SHIMANO DEORE XT "STI"; SHORT CAGE RR.				
BRAKES	SHIMANO DEORE XT, CANTILEVERS "SLR"				
WHEELS	HANDBUILT BY WHEELTECH				
HUBS	SHIMANO DEORE XT; 12-28" "HG" COGS				
SPOKES	DT COMPETITION 14-15-14g. WITH ALLOY NIPPLES				
RIMS	WOLBER AT18 32H; HEAT TREATED; HARD ANODIZED; BLACK				
TIRES	RITCHEY MEGABITE "OVERDRIVE" 26 X 2.0				
COLOUR	RAW SILVER/BLACK				



STRATOS

Light yet stiff enough to challenge the toughest of downhills, the STRATOS is famous for its 1989 results;

Rider: Cindy Devine

Bike: STRATOS

Results: NORBA National Slalom Champion, World's Downhill Champion

S P E C I F I C A T I O N S

STRATOS

(DIMENSIONS IN INCHES)

SIZE (CENTRE TO TOP)	17.0	18.5	20.0	21.5
HEAD ANGLE	70.5	70.5	70.5	70.5
SEAT ANGLE	72.5	72.5	72.5	72.5
TOP TUBE	21.7	22.7	23.3	23.8
CHAINSTAY	16.9	16.9	16.9	16.9
B/B HEIGHT	11.5	11.75	11.75	11.75
FRAME	ALUMINUM #7000 SERIES			
FEATURES	OVERSIZE SLOPING TOP TUBE, WISHBONE SEAT STAY, REVERSE SEAT COLLAR			
FORK	TANGE BIG FORK			
FEATURES	LARGE RADIUS; DIA. 1-1/8" UNTAPERED, INTERNAL BUTTED 1.2-0.9-0.6mm			
HANDLEBARS	TANGE PRESTIGE, "KRATON" GRIPS			
STEM	ROCKY MTN. CRO-MO			
SEAT POST	KALLOY HEAT TREATED CRO-MO; 27.0 x 300			
SADDLE	VELO TURBO LEATHER			
HEADSET	SHIMANO DEORE DX; DIA. 1-1/8"			
CHAIN, B/B AND CRANKSET	SHIMANO DEORE DX 24-36-46 "SG" ROUND RINGS			
PEDALS	SHIMANO DEORE DX COMP, WITH CLIPS AND STRAPS			
DERAILLEURS	SHIMANO DEORE DX "STI", SHORT CAGE RR.			
BRAKES	SHIMANO DEORE DX, CANTILEVERS "SLR"			
WHEELS	HANDFINISHED BY WHEELTECH			
HUBS	SHIMANO DEORE DX; 12-28" "HG" COGS			
SPOKES	DT SWISS S.S. 14g			
RIMS	WOLBER AT18 32H; HEAT TREATED; SILVER			
TIRES	RITCHEY MEGABITE "HARDDRIVE" 26 X 2.1			
COLOUR	RAW SILVER/BLACK			



ÉQUIPE

The ÉQUIPE is the "stock built" Tantalus. This race-engineered frame will track like a razor through the corners, or slide through at will. Rocky Mountain bike owners have a passion for their bike that makes them experience the joy of unconquered terrain.

S P E C I F I C A T I O N S

ÉQUIPE	(DIMENSIONS IN INCHES)			
SIZE (CENTRE TO TOP)	17.0	18.5	20.0	21.5
HEAD ANGLE	71.0	71.0	71.0	71.0
SEAT ANGLE	72.5	72.5	72.5	72.5
TOP TUBE	21.7	22.7	23.2	23.7
CHAINSTAY	16.9	16.9	16.9	16.9
B/B HEIGHT	11.5	11.5	11.5	11.5
FRAME	TANGE PRESTIGE			
FEATURES	WISHBONE SEAT STAY CRO-MO, TOP TUBE CABLE ROUTING, REVERSE SEAT COLLAR			
FORK	TANGE BIG FORK			
FEATURES	LARGE RADIUS; DIA. 1-1/8" UNTAPERED, INTERNAL BUTTED 1.2-0.8-0.6mm			
HANDLEBARS	TANGE PRESTIGE; "KRATON" GRIPS			
STEM	ROCKY MOUNTAIN CRO-MO			
SEAT POST	KALLOY HEAT TREATED CRO-MO; 27.0 x 330			
SADDLE	VELO TURBO LEATHER			
HEADSET	SHIMANO DEORE DX; DIA. 1-1/8"			
CHAIN, B/B AND CRANKSET	SHIMANO DEORE DX 24-36-46 "SG" ROUND RINGS			
PEDALS	SHIMANO DEORE DX COMP. WITH CLIPS AND STRAPS			
DERAILLEURS	SHIMANO DEORE DX "STI"; SHORT CAGE RR.			
BRAKES	SHIMANO DEORE DX CANTILEVERS "SLR"			
WHEELS	HANDFINISHED BY WHEELTECH			
HUBS	SHIMANO DEORE DX; 12-28" "HG" COGS			
SPOKES	DT SWISS S.S. 14g			
RIMS	WOLBER AT18 32H; HARD ANODIZED; HEAT TREATED; BLACK			
TIRES	RITCHEY MEGABITE "HARDDRIVE" 26 X 2.1			
COLOUR	NEON GREEN/BLACK			



HAMMER

Hammer flat out, pound up the hills, scream back down. Challenge all rivals on the HAMMER. The basic choice of a rider who wants to compete in the toughest conditions.

S P E C I F I C A T I O N S

HAMMER	(DIMENSIONS IN INCHES)			
SIZE (CENTRE TO TOP)	17.0	18.5	20.0	21.5
HEAD ANGLE	70.5	70.5	70.5	70.5
SEAT ANGLE	72.0	72.0	72.0	72.0
TOP TUBE	21.7	22.7	23.2	23.7
CHAINSTAY	16.9	16.9	16.9	16.9
B/B HEIGHT	11.5	11.5	11.5	11.5
FRAME	TANGE CRO-MO SEAMLESS MTB			
FEATURES	OVERSIZE SLOPING TOP TUBE, WISHBONE SEAT STAY CRO-MO, TOP TUBE CABLE ROUTING			
FORK	TANGE CRO-MO			
FEATURES	LARGE RADIUS DIA. 1-1/8" BLADES			
HANDLEBARS	ROCKY MTN. CRO-MO; "KRATON" GRIPS			
STEM	ROCKY MTN. CRO-MO			
SEAT POST	KALLOY HEAT TREATED CRO-MO; 27.0 x 300			
SADDLE	VELD VINYL			
HEADSET	YST ALLOY 1-1/8" DIA.			
CHAIN, B/B AND CRANKSET	SHIMANO DEORE DX 24-36-46 "SG" ROUND RINGS			
PEDALS	SHIMANO DEORE DX COMP. WITH CLIPS AND STRAPS			
DERAILLEURS	SHIMANO DEORE DX "STI"; LONG CAGE RR.			
BRAKES	SHIMANO DEORE DX; CANTILEVERS "SLR"			
WHEELS	HANDFINISHED BY WHEELTECH			
HUBS	SHIMANO DEORE DX, 12-28" "HG" COGS			
SPOKES	DT SWISS S.S. 14g			
RIMS	WOLBER AT20 32H; HEAT TREATED; SILVER			
TIRES	RITCHEY MEGABITE "HARDDRIVE" 26 X 2.1			
COLOUR	NEON ORANGE/COOL GREY OR WHITE/SEA FOAM GREEN			



FUSION

Fusion of individual care and dedication, not usually attributed to imports, is the birthmark of this bike. The FUSION name is the trademark for good value, without compromise. To ride such a bicycle is entirely satisfying.

S P E C I F I C A T I O N S

FUSION	(DIMENSIONS IN INCHES)						
SIZE (CENTRE TO TOP)	15.5	17.0	17.5-STT	18.5	18.5-STT	20	21.5
HEAD ANGLE	69.0	70.5	70.5	70.5	70.5	70.5	70.5
SEAT ANGLE	74.0	72.5	74.0	72.5	72.5	72.5	72.5
TOP TUBE	20.2	21.7	20.7	22.4	21.7	23.0	23.6
CHAINSTAY	16.9	16.9	16.9	16.9	16.9	16.9	16.9
B/B HEIGHT	11.5	11.5	11.5	11.5	11.5	11.5	11.5
FRAME	ISHIWATA CRO-MO TRIPLE BUTTED						
FEATURES	OVERSIZE SLOPING TOP TUBE; CUSTOM CABLE ROUTING; VERTICAL DROPOUTS; RACK AND FENDER BRAZE-ONS						
FORK	FULL CRO-MO						
FEATURES	LARGE RADIUS DIA. 1-1/8" BLADES						
HANDLEBARS	ROCKY MTN.; "KRATON" GRIPS						
STEM	ROCKY MTN. CRO-MO						
SEAT POST	KALLOY ALLOY; 27.0 x 300						
SADDLE	VELO VINYL						
HEADSET	YST ALLOY 1-1/8" DIA.						
CHAIN AND B/B	SHIMANO DEORE DX						
CRANKSET	SHIMANO DEORE LX 28-38-48 "SG" ROUND RINGS						
PEDALS	SHIMANO DEORE LX, WITH CLIPS AND STRAPS						
DERAILLEURS	SHIMANO DEORE LX "STI"; WITH DEORE DX SHIFTERS.						
BRAKES	SHIMANO DEORE LX, CANTI FR, U-2 RR & DX 2 FINGER "SLR" LEVERS						
WHEELS	HANDFINISHED BY WHEELTECH						
HUBS	SHIMANO DEORE LX; 13-30 "HG" COGS						
SPOKES	DT SWISS S.S. 14g						
RIMS	WOLBER AT20. 32H; HEAT TREATED; SILVER						
TIRES	RITCHEY "MOD QUAD" 26 x 2.0						
COLOUR	ROYAL BLUE/SKY BLUE OR BLACK/BLACK						



METRO

Light and lively, it's the bike for those who like to get off the beaten path. Whether it's the mountains of Colorado, or the uncivilized canyons of Toronto. The METRO is carefully built for your backyard jungle.

S P E C I F I C A T I O N S

METRO	(DIMENSIONS IN INCHES)			
SIZE (CENTRE TO TOP)	18.5	20.0	21.5	23.0
HEAD ANGLE	72.5	72.5	72.5	72.5
SEAT ANGLE	74.0	73.0	73.0	73.0
TOP TUBE	22.3	22.8	23.3	23.7
CHAINSTAY	17.1	17.1	17.1	17.1
B/B HEIGHT	11.6	11.6	11.6	11.6
FRAME	TANGE CRO-MO			
FEATURES	FULL EXPEDITION BRAZE-ONS, EQUIPPED FOR 700C WHEELS FOR MTN BIKE TIRES (1.6 WIDTH)			
FORK	TANGE CRO-MO			
FEATURES	40C CLEARANCE			
HANDLEBARS	ROCKY MTN. CRO-MO; WITH SYNCROS STEERHORN			
STEM	ROCKY MTN. CRO-MO			
SEAT POST	KALLOY ALLOY; 27.0 x 300			
SADDLE	VELO VINYL			
HEADSET	SHIMANO DEORE LX			
CHAIN AND B/B	SHIMANO DEORE DX			
CRANKSET	SHIMANO DEORE LX 28-38-48 "SG" ROUND RINGS			
PEDALS	SHIMANO DEORE LX, WITH CLIPS AND STRAPS			
DERAILLEURS	SHIMANO DEORE LX "STI" LEVERS			
BRAKES	SHIMANO DEORE LX, CANTILEVER "SLR"			
WHEELS	HANDFINISHED BY WHEELTECH			
HUBS	SHIMANO DEORE LX; 12-28" "HG" COGS			
SPOKES	DT SWISS SG 14g			
RIMS	WOLBER GTA 700C, 32H; HEAT TREATED; SILVER			
TIRES	B. GORDON 700 x 40C; KEVLAR BEAD			
COLOUR	DEEP RED/WHITE			

ROCKY MOUNTAIN BICYCLES

214-5920 No. 6 Road, Richmond, B.C. V6V 1Z1 Tel: (604) 270-2710

14-4370 Steeles Avenue West, Woodbridge, On. L4L 4Y4 Tel: (416) 851-5753

Meridian Place, 323 Telegraph Road, Bellingham, Wa. 98226 Tel: (604) 270-2710

"Specifications are subject to change without notice for equal or superior quality product"

Concept and Design Slicko Studios

Photo Credits: Leanna Rath, Larry Goldstein, Kharen Hill,

Henry Georgi, Mark Gallup and Monty Sheldon

Printed by Intermedia

PRINTED IN CANADA